



TEST REPORT
IEC 60598-2-21
Part 2: Particular requirements
Section 21: Rope Lights

Report Number.....:	AOC250507001S-R1
Date of issue.....:	2025-05-13
Total number of pages.....:	81 pages
Name of Testing Laboratory preparing the Report.....:	Shenzhen AOCE Electronic Technology Service Co., Ltd Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
Applicant's name.....:	YUYAO CHENGBANG TRADING CO.,LTD
Address.....:	Room 508,NO.4 building fujia new village east,jiangnan village,lubu town,yuyao city,zhejiang province
Test specification:	
Standard.....:	☒ EN 60598-2-21:2015 ☒ EN 60598-2-20:2015 ☒ EN 60598-2-4:2018 ☒ EN IEC 60598-1:2021+A11:2022
Test procedure.....:	CE-LVD
Non-standard test method.....:	N/A
Test Report Form No.....:	IEC60598_2_21B
Test Report Form(s) Originator.....:	DEKRA Certification B.V.
Master TRF.....:	Dated 2020-01-31
Copyright © 2020 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed	
General disclaimer: The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the Testing Laboratory, responsible for this Test Report.	

Test item description..... :	LIGHTING CHAIN	
Trade Mark(s)..... :	N/A	
Manufacturer..... :	YUYAO CHENGBANG TRADING CO.,LTD Room 508,NO.4 building fujia new village east,jiangnan village,lubu town,yuyao city,zhejiang province	
Model/Type reference..... :	See Model List	
Ratings..... :	Input: 220-240 V~ For CBG50-60-24: 24 VDC, 24 W	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
☒	Testing Laboratory:	Shenzhen AOCE Electronic Technology Service Co., Ltd
	Testing location/ address..... :	Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
	Tested by (name, function, signature)..... :	ZhiCong Xian Technical Engineer <i>ZhiCong Xian</i>
	Approved by (name, function, signature)... :	Robin Liu Technical Manager <i>Robin. Liu</i>
☐	Testing procedure: CTF Stage 1:	
	Testing location/ address..... :	
	Tested by (name, function, signature)..... :	
	Approved by (name, function, signature)... :	
☐	Testing procedure: CTF Stage 2:	
	Testing location/ address..... :	
	Tested by (name + signature)..... :	
	Witnessed by (name, function, signature).. :	
	Approved by (name, function, signature)... :	
☐	Testing procedure: CTF Stage 3:	
☐	Testing procedure: CTF Stage 4:	
	Testing location/ address..... :	
	Tested by (name, function, signature)..... :	
	Witnessed by (name, function, signature).. :	

Approved by (name, function, signature)... :		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment):**Attachment No.1:** European Group Differences And National Differences.**Attachment No.2:** Clause 13 of EN IEC 62031**Attachment No.3:** IEC TR 62778.**Attachment No.4:** Photo document.**Summary of testing:****Tests performed (name of test and test clause):**

- EN 60598-2-21:2015
- EN IEC 60598-1:2021+A11:2022
- Clause 13 of EN IEC 62031:2020+A11:2021
- IEC TR 62778:2014
- EN 60598-2-4:2018
- EN 60598-2-20:2015

Testing location:

Shenzhen AOCE Electronic Technology Service Co., Ltd
 Room 202, 2nd Floor, No.12th Building of Xinhe
 Tongfuyu Industrial Park, Fuhai Street, Baoan
 District, Shenzhen, Guangdong, China

Summary of compliance with National Differences (List of countries addressed):

European Group Differences And National Differences


☒ **The product fulfils the requirements of EN 60598-2-21:2015 & EN IEC 60598-1:2021**
Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

Lighting chain
Model:CBG50-05-24T
24VDC,Max.2.6W
5 bulbs

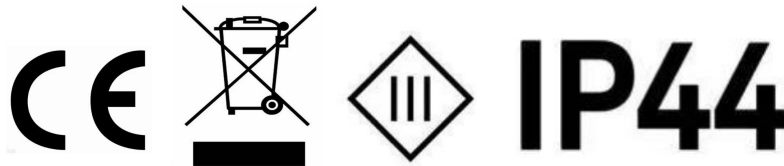

1. >Do not connect the chain to the supply while it is in the packing unless the packing has been adapted for display purposes.
- 2.>The lamps are not replaceable.
- 3.>Only use replacement lamps of the same type as those delivered originally or of a type specified by the manufacturer
- 4.>This lighting chain can only interconnected with max.60 bulbs.

YUYAO CHENGBANG TRADING CO.,LTD

Room 508,NO.4 building fujia new village east,jiangnan village,lubu town,yuyao city,zhejiang province

Lighting chain
Model:CBG50-60-24
24VDC,Max.24W
60 bulbs



- 1.>Do not connect the chain to the supply while it is in the packing unless the packing has been adapted for display purposes.
- 2.>The lamps are not replaceable.

YUYAO CHENGBANG TRADING CO.,LTD

Room 508,NO.4 building fujia new village east,jiangnan village,lubu town,yuyao city,zhejiang province

Remark:

The above mark is the minimum requirements required by the safety standard. For the final production, the additional marks which do not give rise to misunderstanding may be added.

Test item particulars..... :	
Classification of installation and use..... :	Rope lights and for indoor use only
Supply Connection..... :	Supply cord fitted with a detachable plug
Possible test case verdicts:	
- test case does not apply to the test object..... :	N/A
- test object does meet the requirement..... :	P (Pass)
- test object does not meet the requirement..... :	F (Fail)
Testing..... :	
Date of receipt of test item..... :	2025-04-23
Date (s) of performance of tests..... :	2025-04-23 to 2025-05-13
General remarks:	
The tested sample(s) and the sample information are provided by the client. "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Note: EN Group Differences together with National Differences and Special National Conditions, if any, are in the Appendix to the main body of this TRF. Throughout this report a ☐ comma / ☒ point is used as the decimal separator. The test report only allows to be revised only within the report defined retention period unless standard or regulation was withdrawn or invalid. When determining for test conclusion, measurement uncertainty of tests has been considered. Clause numbers between brackets refer to clauses in IEC 60598-1. Note: clauses marked “*” not included in CNAS scope.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided..... :	☐ Yes ☒ Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)..... : Same as manufacturer	

General product information:**Model list**

MODEL: CB# - ** - XT

“#” stands for the bulb type, # = G45, G50, A19, G80, BLOCK, S01, S02, S03, C7, etc

“***” stands for the number on bulbs, details see below table.

“X” indicates that the rated voltage is 3.2/5/12/24/31

“T” stands for lighting chain with end-connector, without “T” stands for lighting chain without end connector.

Picture of LED bulb	Model No.	Lamp Number	Total wattage (W)	Max. Number interconnected LED lighting chain
	CB# (1) -05-3.2T	5	2	1-12
	CB# (1) -10-3.2T	10	2	1-6
	CB# (1) -20-3.2T	20	2	1-3
	CB# (1) -30-3.2T	30	2	1-2
	CB# (1) -40-3.2T	40	2	N
	CB# (1) -50-3.2T	50	2	N
	CB# (1) -60-3.2T	60	2	N
	CB#-05-5T	5	1.6	1-12
	CB#-10-5T	10	1.6	1-6
	CB#-20-5T	20	2.5	1-3
	CB#-30-5T	30	3	1-2
	CB#-40-5T	40	3.3	N
	CB#-50-5T	50	3.3	N
	CB#-60-5T	60	3.6	N
	CB#-05-5T	5	3.6	1-4
	CB#-10-5T	10	3.6	1-2
	CB#-20-5T	20	4.5	N
	CB#-05-24T	5	2.7	1-12
	CB#-10-24T	10	5.2	1-6
	CB#-12-24T	12	6.1	1-5
	CB#-15-24T	15	7.5	1-4
	CB#-20-24T	20	9.8	1-3
	CB#-25-24T	25	11.9	1-2
	CB#-30-24T	30	13.9	1-2
	CB#-35-24T	35	15.8	N
	CB#-40-24T	40	17.4	N
	CB#-45-24T	45	19	N
	CB#-50-24T	50	21	N


Tel: (86)755-85277785

Fax: (86)755-23705230

E-mail: postmaster@aoc-cert.comWebsite: <http://www.aoc-cert.com>

TRF No. IEC60598_2_1B

	CB#-55-24T	55	22.7	N
	CB#-60-24T	60	24	N
	CB#-05-12T	5	1	1-20
	CB#-10-12T	10	1.9	1-10
	CB#-20-12T	20	3.2	1-5
	CB#-30-12T	30	5.1	1-3
	CB#-40-12T	40	6.4	1-2
	CB#-50-12T	50	8.3	1-2
	CB#-60-12T	60	10.2	N
	CB#-70-12T	70	11.6	N
	CB#-80-12T	80	12.8	N
	CB#-90-12T	90	14.7	N
	CB#-100-12T	100	16.5	N
	CB (3) -#05-3.2T	5	0.5	1-12
	CB (3) -#10-3.2T	10	0.5	1-6
	CB (3) -#20-3.2T	20	1.2	1-3
	CB (3) -#30-3.2T	30	1.8	1-2
	CB (3) -#40-3.2T	40	2.4	N
	CB (3) -#50-3.2T	50	3	N
	CB (3) -#60-3.2T	60	3.6	N
  	CB-F-#5-24T	5	3.3	1-12
	CB-F-#10-24T	10	6	1-6
	CB-F-#12-24T	12	6.8	1-5
	CB-F-#15-24T	15	8.2	1-4
	CB-F-#20-24T	20	9.9	1-3
	CB-F-#25-24T	25	11	1-2
	CB-F-#30-24T	30	12	1-2
	CB-F-#35-24T	35	12.8	N
	CB-F-#40-24T	40	13.5	N
	CB-F-#45-24T	45	13.9	N
	CB-F-#50-24T	50	14.3	N
	CB-F-#55-24T	55	14.6	N
	CB-F-#60-24T	60	14.8	N
	CB-F-# (1) -05-3.2T	5	0.5	1-12
	CB-F-# (1) -10-3.2T	10	0.5	1-6
	CB-F-# (1) -20-3.2T	20	1.2	1-3
	CB-F-# (1) -30-3.2T	30	1.8	1-2
	CB-F-# (1) -40-3.2T	40	2.4	N
	CB-F-# (1) -50-3.2T	50	3	N
	CB-F-# (1) -60-3.2T	60	3.6	N
	CB#-05-3.2T	5	3.2	1-10
	CB#-10-3.2T	10	3.2	1-5
	CB#-15-3.2T	15	3.2	1-3
	CB#-20-3.2T	20	3.2	1-2
	CB#-25-3.2T	25	3.2	1-2
	CB#-30-3.2T	30	3.2	N
	CB#-35-3.2T	35	3.2	N

	CB#-40-3.2T	40	3.2	N
	CB#-45-3.2T	45	3.2	N
	CB#-50-3.2T	50	3.2	N
	CB (1) #-05-4.5T	5	0.8	1-10
	CB (1) #-10-4.5T	10	1.4	1-5
	CB (1) #-15-4.5T	15	2	1-3
	CB (1) #-20-4.5T	20	2.4	1-2
	CB (1) #-25-4.5T	25	3	1-2
	CB (1) #-30-4.5T	30	3.6	N
	CB (1) #-35-4.5T	35	4	N
	CB (1) #-40-4.5T	40	4.5	N
	CB (1) #-45-4.5T	45	5	N
	CB (1) #-50-4.5T	50	6	N
	CB (2) #-05-4.5T	5	1.8	1-10
	CB (2) #-10-4.5T	10	3.6	1-5
	CB (2) #-15-4.5T	15	5	1-3
	CB (2) #-20-4.5T	20	6	1-2
	CB (2) #-25-4.5T	25	6	1-2
	CB (2) #-30-4.5T	30	6	N
	CB (2) #-35-4.5T	35	6	N
	CB (2) #-40-4.5T	40	6	N
	CB (2) #-45-4.5T	45	6	N
	CB (2) #-50-4.5T	50	6	N
	CB#-05-24T	5	1.4	1-12
	CB#-10-24T	10	2.6	1-6
	CB#-20-24T	20	5	1-3
	CB#-30-24T	30	7.4	1-2
	CB#-40-24T	40	10	N
	CB#-50-24T	50	12.4	N
	CB#-60-24T	60	14.8	N
 	CB#-05-24T	5	2.7	1-12
	CB#-10-24T	10	5.2	1-6
	CB#-12-24T	12	6.1	1-5
	CB#-15-24T	15	7.5	1-4
	CB#-20-24T	20	9.8	1-3
	CB#-25-24T	25	11.9	1-2
	CB#-30-24T	30	13.9	1-2
	CB#-35-24T	35	15.8	N
	CB#-40-24T	40	17.4	N
	CB#-45-24T	45	19	N
	CB#-50-24T	50	21	N
	CB#-55-24T	55	22.7	N
	CB#-60-24T	60	24	N
	CB#-05-5T	5	3.6	1-4
	CB#-10-5T	10	3.6	1-2
	CB#-20-5T	20	4.5	N
	CBS01-#-05-3.2T	5	0.5	1-12
	CBS01-#-10-3.2T	10	0.5	1-6
	CBS01-#-20-3.2T	20	1.2	1-3

	CBS01-#30-3.2T	30	1.8	1-2
	CBS01-#40-3.2T	40	2.4	N
	CBS01-#50-3.2T	50	3	N
	CBS01-#60-3.2T	60	3.6	N
	CBS01 (3) -#05-3.2T	5	0.5	1-12
	CBS01 (3) -#10-3.2T	10	0.5	1-6
	CBS01 (3) -#20-3.2T	20	1.2	1-3
	CBS01 (3) -#30-3.2T	30	1.8	1-2
	CBS01 (3) -#40-3.2T	40	2.4	N
	CBS01 (3) -#50-3.2T	50	3	N
	CBS01 (3) -#60-3.2T	60	3.6	N
	CBS02-#05-3.2T	5	0.5	1-12
	CBS02-#10-3.2T	10	0.5	1-6
	CBS02-#20-3.2T	20	1.2	1-3
	CBS02-#30-3.2T	30	1.8	1-2
	CBS02-#40-3.2T	40	2.4	N
	CBS02-#50-3.2T	50	3	N
	CBS02-#60-3.2T	60	3.6	N
	CBS01-#05-5T	5	1.6	1-12
	CBS01-#10-5T	10	1.6	1-6
	CBS01-#20-5T	20	2.5	1-3
	CBS01-#30-5T	30	3	1-2
	CBS01-#40-5T	40	3.3	N
	CBS01-#50-5T	50	3.3	N
	CBS01-#60-5T	60	3.6	N
	CBS02-#05-5T	5	1.6	1-12
	CBS02-#10-5T	10	1.6	1-6
	CBS02-#20-5T	20	2.5	1-3
	CBS02-#30-5T	30	3	1-2
	CBS02-#40-5T	40	3.3	N
	CBS02-#50-5T	50	3.3	N
	CBS02-#60-5T	60	3.6	N
	CBS01-#05-24T	5	2.6	1-12
	CBS01-#10-24T	10	4.5	1-6
	CBS01-#20-24T	20	9.4	1-3
	CBS01-#20-24T1	20	8.4	1-3
	CBS01-#30-24T	30	13.5	1-2
	CBS01-#40-24T	40	17	N
	CBS01-#50-24T	50	21	N
	CBS01-#60-24T	60	24	N
	CBS02-#05-24T	5	2.6	1-12
	CBS02-#10-24T	10	4.5	1-6
	CBS02-#20-24T	20	9.4	1-3
	CBS02-#20-24T1	20	8.4	1-3
	CBS02-#30-24T	30	13.5	1-2
	CBS02-#40-24T	40	17	N
	CBS02-#50-24T	50	21	N
	CBS02-#60-24T	60	24	N

	CBS02-#-60-24T	60	24	N
	CBS01(1)-#-05-24T	5	2.8	1-8
	CBS01(1)-#-10-24T	10	5.6	1-4
	CBS01(1)-#-20-24T	20	8.4	1-2
	CBS01(1)-#-30-24T	30	11.2	N
	CBS01(1)-#-40-24T	40	14	N
	CBS01(1)-#-50-24T	50	14.8	N
	CBS01(1)-#-60-24T	60	14.8	N
	CBS01 (2) -#-05-3.2T	5	0.5	1-8
	CBS01 (2) -#-10-3.2T	10	0.5	1-4
	CBS01 (2) -#-20-3.2T	20	1.2	1-2
	CBS01 (2) -#-30-3.2T	30	1.8	N
	CBS01 (2) -#-40-3.2T	40	2.4	N
	CBS01 (2) -#-50-3.2T	50	3	N
	CBS01 (2) -#-60-3.2T	60	3.6	N
	CBS02(1)-#-05-24T	5	2.8	1-8
	CBS02(1)-#-10-24T	10	5.6	1-4
	CBS02(1)-#-20-24T	20	8.4	1-2
	CBS02(1)-#-30-24T	30	11.2	1-2
	CBS02(1)-#-40-24T	40	14	N
	CBS02(1)-#-50-24T	50	14.8	N
	CBS02(1)-#-60-24T	60	14.8	N
	CBS02 (2) -#-05-3.2T	5	0.5	1-8
	CBS02 (2) -#-10-3.2T	10	0.5	1-4
	CBS02 (2) -#-20-3.2T	20	1.2	1-2
	CBS02 (2) -#-30-3.2T	30	1.8	N
	CBS02 (2) -#-40-3.2T	40	2.4	N
	CBS02 (2) -#-50-3.2T	50	3	N
	CBS02 (2) -#-60-3.2T	60	3.6	N
	CBS01 (1) -#-05-3.2T	5	3.2	1-12
	CBS01 (1) -#-10-3.2T	10	3.2	1-6
	CBS01 (1) -#-20-3.2T	20	3.2	1-3
	CBS01 (1) -#-30-3.2T	30	3.2	1-2
	CBS01 (1) -#-40-3.2T	40	3.2	N
	CBS01 (1) -#-50-3.2T	50	3.2	N
	CBS01 (1) -#-60-3.2T	60	3.2	N
	CBS02 (1) -#-05-3.2T	5	3.2	1-12
	CBS02 (1) -#-10-3.2T	10	3.2	1-6
	CBS02 (1) -#-20-3.2T	20	3.2	1-3
	CBS02 (1) -#-30-3.2T	30	3.2	1-2
	CBS02 (1) -#-40-3.2T	40	3.2	N
	CBS02 (1) -#-50-3.2T	50	3.2	N
	CBS02 (1) -#-60-3.2T	60	3.2	N
	CBC7-#-5-24T	5	2.8	1-8
	CBC7-#-10-24T	10	5.6	1-4

	CBC7-#-20-24T	20	8.4	1-2
	CBC7-#-30-24T	30	11.2	1-2
	CBC7-#-40-24T	40	14	N
	CBC7-#-50-24T	50	14.8	N
	CBC7-#-60-24T	60	14.8	N
	CBC7 (3) -#-05-3.2T	5	0.5	1-8
	CBC7 (3) -#-10-3.2T	10	0.5	1-4
	CBC7 (3) -#-20-3.2T	20	1.2	1-2
	CBC7 (3) -#-30-3.2T	30	1.8	N
	CBC7 (3) -#-40-3.2T	40	2.4	N
	CBC7 (3) -#-50-3.2T	50	3	N
	CBC7 (3) -#-60-3.2T	60	3.6	N
	CBC7 (1) -#-05-3.2T	5	3.2	1-12
	CBC7 (1) -#-10-3.2T	10	3.2	1-6
	CBC7 (1) -#-20-3.2T	20	3.2	1-3
	CBC7 (1) -#-30-3.2T	30	3.2	1-2
	CBC7 (1) -#-40-3.2T	40	3.2	N
	CBC7 (1) -#-50-3.2T	50	3.2	N
	CBC7 (1) -#-60-3.2T	60	3.2	N
	CBC7 (2) -#-05-3.2T	5	0.5	1-12
	CBC7 (2) -#-10-3.2T	10	0.5	1-6
	CBC7 (2) -#-20-3.2T	20	1.2	1-3
	CBC7 (2) -#-30-3.2T	30	1.8	1-2
	CBC7 (2) -#-40-3.2T	40	2.4	N
	CBC7 (2) -#-50-3.2T	50	3	N
	CBC7 (2) -#-60-3.2T	60	3.6	N
	CBC9-#-5-24T	5	2.8	1-8
	CBC9-#-10-24T	10	5.6	1-4
	CBC9-#-20-24T	20	8.4	1-2
	CBC9-#-30-24T	30	11.2	N
	CBC9-#-40-24T	40	14	N
	CBC9-#-50-24T	50	14.8	N
	CBC9-#-60-24T	60	14.8	N
	CBC9 (2) -#-05-3.2T	5	0.5	1-8

	CBC9 (2) -#10-3.2T	10	0.5	1-4
	CBC9 (2) -#20-3.2T	20	1.2	1-2
	CBC9 (2) -#30-3.2T	30	1.8	N
	CBC9 (2) -#40-3.2T	40	2.4	N
	CBC9 (2) -#50-3.2T	50	3	N
	CBC9 (2) -#60-3.2T	60	3.6	N
	CBC9-#05-3.2T	5	0.5	1-12
	CBC9-#10-3.2T	10	0.5	1-6
	CBC9-#20-3.2T	20	1.2	1-3
	CBC9-#30-3.2T	30	1.8	1-2
	CBC9-#40-3.2T	40	2.4	N
	CBC9-#50-3.2T	50	3	N
	CBC9-#60-3.2T	60	3.6	N
	CBC9 (1) -#05-3.2T	5	0.5	1-12
	CBC9 (1) -#10-3.2T	10	0.5	1-6
	CBC9 (1) -#20-3.2T	20	1.2	1-3
	CBC9 (1) -#30-3.2T	30	1.8	1-2
	CBC9 (1) -#40-3.2T	40	2.4	N
	CBC9 (1) -#50-3.2T	50	3	N
	CBC9 (1) -#60-3.2T	60	3.6	N
	CBS03-#5-24T	5	3.3	1-12
	CBS03-#10-24T	10	6	1-6
	CBS03-#12-24T	12	6.8	1-5
	CBS03-#15-24T	15	8.2	1-4
	CBS03-#20-24T	20	9.9	1-3
	CBS03-#25-24T	25	11	1-2
	CBS03-#30-24T	30	12	1-2
	CBS03-#35-24T	35	12.8	N
	CBS03-#40-24T	40	13.5	N
	CBS03-#45-24T	45	13.9	N
	CBS03-#50-24T	50	14.3	N
	CBS03-#55-24T	55	14.6	N
	CBS03-#60-24T	60	14.8	N

	CBS03 (1) -#05-3.2T	5	0.5	1-12
	CBS03 (1) -#10-3.2T	10	0.5	1-6
	CBS03 (1) -#20-3.2T	20	1.2	1-3
	CBS03 (1) -#30-3.2T	30	1.8	1-2
	CBS03 (1) -#40-3.2T	40	2.4	N
	CBS03 (1) -#50-3.2T	50	3	N
	CBS03 (1) -#60-3.2T	60	3.6	N
	CBS03-#05-3.2T	5	3.2	1-10
	CBS03-#10-3.2T	10	3.2	1-5
	CBS03-#15-3.2T	15	3.2	1-3
	CBS03-#20-3.2T	20	3.2	1-2
	CBS03-#25-3.2T	25	3.2	1-2
	CBS03-#30-3.2T	30	3.2	N
	CBS03-#35-3.2T	35	3.2	N
	CBS03-#40-3.2T	40	3.2	N
	CBS03-#45-3.2T	45	3.2	N
	CBS03-#50-3.2T	50	3.2	N
	CBS03-#05-5T	5	1.6	1-12
	CBS03-#10-5T	10	1.6	1-6
	CBS03-#20-5T	20	2.5	1-3
	CBS03-#30-5T	30	3	1-2
	CBS03-#40-5T	40	3.3	N
	CBS03-#50-5T	50	3.3	N
	CBS03-#60-5T	60	3.6	N
	CB-E27(D)-#5-24T-A	5	3.3	1-12
	CB-E27(D)-#10-24T-A	10	6	1-6
	CB-E27(D)-#12-24T-A	12	6.8	1-5
	CB-E27(D)-#15-24T-A	15	8.2	1-4
	CB-E27(D)-#20-24T-A	20	9.9	1-3
	CB-E27(D)-#25-24T-A	25	11	1-2
	CB-E27(D)-#30-24T-A	30	12	1-2
	CB-E27(D)-#35-24T-A	35	12.8	N
	CB-E27(D)-#40-24T-A	40	13.5	N
	CB-E27(D)-#45-24T-A	45	13.9	N
	CB-E27(D)-#50-24T-A	50	14.3	N
	CB-E27(D)-#55-24T-A	55	14.6	N
	CB-E27(D)-#60-24T-A	60	14.8	N
	CB-E27(D) (1) -#05-3.2T-A	5	0.5	1-12

	CB-E27(D) (1) #-10-3.2T-A	10	0.5	1-6
	CB-E27(D) (1) #-20-3.2T-A	20	1.2	1-3
	CB-E27(D) (1) #-30-3.2T-A	30	1.8	1-2
	CB-E27(D) (1) #-40-3.2T-A	40	2.4	N
	CB-E27(D) (1) #-50-3.2T-A	50	3	N
	CB-E27(D) (1) #-60-3.2T-A	60	3.6	N
	CB-E27(D) #-05-3.2T-A	5	3.2	1-10
	CB-E27(D) #-10-3.2T-A	10	3.2	1-5
	CB-E27(D) #-15-3.2T-A	15	3.2	1-3
	CB-E27(D) #-20-3.2T-A	20	3.2	1-2
	CB-E27(D) #-25-3.2T-A	25	3.2	1-2
	CB-E27(D) #-30-3.2T-A	30	3.2	N
	CB-E27(D) #-35-3.2T-A	35	3.2	N
	CB-E27(D) #-40-3.2T-A	40	3.2	N
	CB-E27(D) #-45-3.2T-A	45	3.2	N
	CB-E27(D) #-50-3.2T-A	50	3.2	N
	CB-E27(D) #-05-5T-A	5	1.6	1-12
	CB-E27(D) #-10-5T-A	10	1.6	1-6
	CB-E27(D) #-20-5T-A	20	2.5	1-3
	CB-E27(D) #-30-5T-A	30	3	1-2
	CB-E27(D) #-40-5T-A	40	3.3	N
	CB-E27(D) #-50-5T-A	50	3.3	N
	CB-E27(D) #-60-5T-A	60	3.6	N
	CB-E27(D) #-12-12T-A	12	4.2	N
	CB-E27(D) #-24-12T-A	24	8.4	N
	CB-E27(D) #-36-12T-A	36	12.6	N
	CB-E27(D) #-48-12T-A	48	16.8	N
	CB-E27(D) #-60-12T-A	60	21	N
	CB-E27(D) #-5-24T-B	5	3.3	1-12
	CB-E27(D) #-10-24T-B	10	6	1-6
	CB-E27(D) #-12-24T-B	12	6.8	1-5
	CB-E27(D) #-15-24T-B	15	8.2	1-4
	CB-E27(D) #-20-24T-B	20	9.9	1-3
	CB-E27(D) #-25-24T-B	25	11	1-2
	CB-E27(D) #-30-24T-B	30	12	1-2
	CB-E27(D) #-35-24T-B	35	12.8	N

	CB-E27(D)-# 40-24T-B	40	13.5	N
	CB-E27(D)-# 45-24T-B	45	13.9	N
	CB-E27(D)-# 50-24T-B	50	14.3	N
	CB-E27(D)-# 55-24T-B	55	14.6	N
	CB-E27(D)-# 60-24T-B	60	14.8	N
	CB-E27(D) (1) -#05-3.2T-B	5	0.5	1-12
	CB-E27(D) (1) -#10-3.2T-B	10	0.5	1-6
	CB-E27(D) (1) -#20-3.2T-B	20	1.2	1-3
	CB-E27(D) (1) -#30-3.2T-B	30	1.8	1-2
	CB-E27(D) (1) -#40-3.2T-B	40	2.4	N
	CB-E27(D) (1) -#50-3.2T-B	50	3	N
	CB-E27(D) (1) -#60-3.2T-B	60	3.6	N
	CB-E27(D)-# 05-3.2T-B	5	3.2	1-10
	CB-E27(D)-# 10-3.2T-B	10	3.2	1-5
	CB-E27(D)-# 15-3.2T-B	15	3.2	1-3
	CB-E27(D)-# 20-3.2T-B	20	3.2	1-2
	CB-E27(D)-# 25-3.2T-B	25	3.2	1-2
	CB-E27(D)-# 30-3.2T-B	30	3.2	N
	CB-E27(D)-# 35-3.2T-B	35	3.2	N
	CB-E27(D)-# 40-3.2T-B	40	3.2	N
	CB-E27(D)-# 45-3.2T-B	45	3.2	N
	CB-E27(D)-# 50-3.2T-B	50	3.2	N
	CB-E27(D)-# 05-5T-B	5	1.6	1-12
	CB-E27(D)-# 10-5T-B	10	1.6	1-6
	CB-E27(D)-# 20-5T-B	20	2.5	1-3
	CB-E27(D)-# 30-5T-B	30	3	1-2
	CB-E27(D)-# 40-5T-B	40	3.3	N
	CB-E27(D)-# 50-5T-B	50	3.3	N
	CB-E27(D)-# 60-5T-B	60	3.6	N
	CB-E27(D)-# 05-24T-B	5	2.7	1-12
	CB-E27(D)-# 10-24T-B	10	5.2	1-6
	CB-E27(D)-# 12-24T-B	12	6.1	1-5
	CB-E27(D)-# 15-24T-B	15	7.5	1-4
	CB-E27(D)-# 20-24T-B	20	9.8	1-3
	CB-E27(D)-# 25-24T-B	25	11.9	1-2

	CB-E27(D)-#-30-24T-B	30	13.9	1-2
	CB-E27(D)-#-35-24T-B	35	15.8	N
	CB-E27(D)-#-40-24T-B	40	17.4	N
	CB-E27(D)-#-45-24T-B	45	19	N
	CB-E27(D)-#-50-24T-B	50	21	N
	CB-E27(D)-#-55-24T-B	55	22.7	N
	CB-E27(D)-#-60-24T-B	60	24	N
	CB-E27(D)-#-05-12T-B	5	1	1-20
	CB-E27(D)-#-10-12T-B	10	1.9	1-10
	CB-E27(D)-#-20-12T-B	20	3.2	1-5
	CB-E27(D)-#-30-12T-B	30	5.1	1-3
	CB-E27(D)-#-40-12T-B	40	6.4	1-2
	CB-E27(D)-#-50-12T-B	50	8.3	1-2
	CB-E27(D)-#-60-12T-B	60	10.2	N
	CB-E27(D)-#-70-12T-B	70	11.6	N
	CB-E27(D)-#-80-12T-B	80	12.8	N
	CB-E27(D)-#-90-12T-B	90	14.7	N
	CB-E27(D)-#-100-12T-B	100	16.5	N
	CBS05-#-05-3.2T	5	0.5	1-12
	CBS05-#-10-3.2T	10	0.5	1-6
	CBS05-#-20-3.2T	20	1.2	1-3
	CBS05-#-30-3.2T	30	1.8	1-2
	CBS05-#-40-3.2T	40	2.4	N
	CBS05-#-50-3.2T	50	3	N
	CBS05-#-60-3.2T	60	3.6	N
	CBS05-#-05-24T	5	2.8	1-8
	CBS05-#-10-24T	10	5.6	1-4
	CBS05-#-20-24T	20	8.4	1-2
	CBS05-#-30-24T	30	11.2	1-2
	CBS05-#-40-24T	40	14	N
	CBS05-#-50-24T	50	14.8	N
	CBS05-#-60-24T	60	14.8	N
	CBS05 (2) -#-05-3.2T	5	0.5	1-12
	CBS05 (2) -#-10-3.2T	10	0.5	1-6
	CBS05 (2) -#-20-3.2T	20	1.2	1-3
	CBS05 (2) -#-30-3.2T	30	1.8	1-2
	CBS05 (2) -#-40-3.2T	40	2.4	N
	CBS05 (2) -#-50-3.2T	50	3	N

	CBS05 (2) -#60-3.2T	60	3.6	N
	CBS05 (1) -#05-3.2T	5	3.2	1-12
	CBS05 (1) -#10-3.2T	10	3.2	1-6
	CBS05 (1) -#20-3.2T	20	3.2	1-3
	CBS05 (1) -#30-3.2T	30	3.2	1-2
	CBS05 (1) -#40-3.2T	40	3.2	N
	CBS05 (1) -#50-3.2T	50	3.2	N
	CBS05 (1) -#60-3.2T	60	3.2	N
	CBS05 -#05-5T	5	1.6	1-12
	CBS05 -#10-5T	10	1.6	1-6
	CBS05 -#20-5T	20	2.5	1-3
	CBS05 -#30-5T	30	3	1-2
	CBS05 -#40-5T	40	3.3	N
	CBS05 -#50-5T	50	3.3	N
	CBS05 -#60-5T	60	3.6	N
	CBS06 -#05-24T	5	3.3	1-12
	CBS06 -#10-24T	10	6	1-6
	CBS06 -#12-24T	12	6.8	1-5
	CBS06 -#15-24T	15	8.2	1-4
	CBS06 -#20-24T	20	9.9	1-3
	CBS06 -#25-24T	25	11	1-2
	CBS06 -#30-24T	30	12	1-2
	CBS06 -#35-24T	35	12.8	N
	CBS06 -#40-24T	40	13.5	N
	CBS06 -#45-24T	45	13.9	N
	CBS06 -#50-24T	50	14.3	N
	CBS06 -#55-24T	55	14.6	N
	CBS06 -#60-24T	60	14.8	N
	CBS06 (2) -#05-3.2T	5	0.5	1-12
	CBS06 (2) -#10-3.2T	10	0.5	1-6
	CBS06 (2) -#20-3.2T	20	1.2	1-3
	CBS06 (2) -#30-3.2T	30	1.8	1-2
	CBS06 (2) -#40-3.2T	40	2.4	N
	CBS06 (2) -#50-3.2T	50	3	N
	CBS06 (2) -#60-3.2T	60	3.6	N
	CBS06 (1) -#05-3.2T	5	3.2	1-12
	CBS06 (1) -#10-3.2T	10	3.2	1-6
	CBS06 (1) -#20-3.2T	20	3.2	1-3

	CBS06 (1) #-30-3.2T	30	3.2	1-2
	CBS06 (1) #-40-3.2T	40	3.2	N
	CBS06 (1) #-50-3.2T	50	3.2	N
	CBS06 (1) #-60-3.2T	60	3.2	N
	CBS06(3) #-05-5T	5	1.6	1-12
	CBS06(3) #-10-5T	10	1.6	1-6
	CBS06(3) #-20-5T	20	2.5	1-3
	CBS06(3) #-30-5T	30	3	1-2
	CBS06(3) #-40-5T	40	3.3	N
	CBS06(3) #-50-5T	50	3.3	N
	CBS06(3) #-60-5T	60	3.6	N
	CBS06 #-12-12T	12	4.2	N
	CBS06 #-24-12T	24	8.4	N
	CBS06 #-36-12T	36	12.6	N
	CBS06 #-48-12T	48	16.8	N
	CBS06 #-60-12T	60	21	N
	CBS06 #-05-5T	5	3.6	1-4
	CBS06 #-10-5T	10	3.6	1-2
	CBS06 #-20-5T	20	4.5	N
	CBS06(5) #-05-24T	5	2.7	1-12
	CBS06(5) #-10-24T	10	5.2	1-6
	CBS06(5) #-12-24T	12	6.1	1-5
	CBS06(5) #-15-24T	15	7.5	1-4
	CBS06(5) #-20-24T	20	9.8	1-3
	CBS06(5) #-25-24T	25	11.9	1-2
	CBS06(5) #-30-24T	30	13.9	1-2
	CBS06(5) #-35-24T	35	15.8	N
	CBS06(5) #-40-24T	40	17.4	N
	CBS06(5) #-45-24T	45	19	N
	CBS06(5) #-50-24T	50	21	N
	CBS06(5) #-55-24T	55	22.7	N
	CBS06(5) #-60-24T	60	24	N
	CBS06(6) #-05-12T	5	1	1-20
	CBS06(6) #-10-12T	10	1.9	1-10
	CBS06(6) #-20-12T	20	3.2	1-5
	CBS06(6) #-30-12T	30	5.1	1-3
	CBS06(6) #-40-12T	40	6.4	1-2
	CBS06(6) #-50-12T	50	8.3	1-2

	CBS06(6)-#-60-12T	60	10.2	N
	CBS06(6)-#-70-12T	70	11.6	N
	CBS06(6)-#-80-12T	80	12.8	N
	CBS06(6)-#-90-12T	90	14.7	N
	CBS06(6)-#-100-12T	100	16.5	N
	CBS07(1)-#-05-3.2T	5	3.2	1-10
	CBS07(1)-#-10-3.2T	10	3.2	1-5
	CBS07(1)-#-15-3.2T	15	3.2	1-3
	CBS07(1)-#-20-3.2T	20	3.2	1-2
	CBS07(1)-#-25-3.2T	25	3.2	1-2
	CBS07(1)-#-30-3.2T	30	3.2	N
	CBS07(1)-#-35-3.2T	35	3.2	N
	CBS07(1)-#-40-3.2T	40	3.2	N
	CBS07(1)-#-45-3.2T	45	3.2	N
	CBS07(1)-#-50-3.2T	50	3.2	N
	CBS07(1)-#-05-24T	5	3.3	1-12
	CBS07(1)-#-10-24T	10	6	1-6
	CBS07(1)-#-12-24T	12	6.8	1-5
	CBS07(1)-#-15-24T	15	8.2	1-4
	CBS07(1)-#-20-24T	20	9.9	1-3
	CBS07(1)-#-25-24T	25	11	1-2
	CBS07(1)-#-30-24T	30	12	1-2
	CBS07(1)-#-35-24T	35	12.8	N
	CBS07(1)-#-40-24T	40	13.5	N
	CBS07(1)-#-45-24T	45	13.9	N
	CBS07(1)-#-50-24T	50	14.3	N
	CBS07(1)-#-55-24T	55	14.6	N
	CBS07(1)-#-60-24T	60	14.8	N
	CBS07(2)-#-05-3.2T	5	0.55	1-12
	CBS07(2)-#-10-3.2T	10	0.62	1-6
	CBS07(2)-#-12-3.2T	12	0.63	1-5
	CBS07(2)-#-15-3.2T	15	0.63	1-4
	CBS07(2)-#-20-3.2T	20	0.63	1-3
	CBS07(2)-#-25-3.2T	25	0.64	1-2
	CBS07(2)-#-30-3.2T	30	0.64	1-2
	CBS07(2)-#-35-3.2T	35	0.64	N
	CBS07(2)-#-40-3.2T	40	0.64	N
	CBS07(2)-#-45-3.2T	45	0.64	N

	CBS07(2)-# 50-3.2T	50	0.64	N
	CBS07(2)-# 55-3.2T	55	0.64	N
	CBS07(2)-# 60-3.2T	60	0.64	N
	CBS09(2)-# 05-3.2T	5	0.55	1-12
	CBS09(2)-# 10-3.2T	10	0.62	1-6
	CBS09(2)-# 12-3.2T	12	0.63	1-5
	CBS09(2)-# 15-3.2T	15	0.63	1-4
	CBS09(2)-# 20-3.2T	20	0.63	1-3
	CBS09(2)-# 25-3.2T	25	0.64	1-2
	CBS09(2)-# 30-3.2T	30	0.64	1-2
	CBS09(2)-# 35-3.2T	35	0.64	N
	CBS09(2)-# 40-3.2T	40	0.64	N
	CBS09(2)-# 45-3.2T	45	0.64	N
	CBS00(2)-# 50-3.2T	50	0.64	N
	CBS00(2)-# 55-3.2T	55	0.64	N
	CBS00(2)-# 60-3.2T	60	0.64	N
	CBS10(2)-# 05-3.2T	5	0.55	1-12
	CBS10(2)-# 10-3.2T	10	0.62	1-6
	CBS10(2)-# 12-3.2T	12	0.63	1-5
	CBS10(2)-# 15-3.2T	15	0.63	1-4
	CBS10(2)-# 20-3.2T	20	0.63	1-3
	CBS10(2)-# 25-3.2T	25	0.64	1-2
	CBS10(2)-# 30-3.2T	30	0.64	1-2
	CBS10(2)-# 35-3.2T	35	0.64	N
	CBS10(2)-# 40-3.2T	40	0.64	N
	CBS10(2)-# 45-3.2T	45	0.64	N
	CBS10(2)-# 50-3.2T	50	0.64	N
	CBS10(2)-# 55-3.2T	55	0.64	N
	CBS10(2)-# 60-3.2T	60	0.64	N

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.4 (0)	GENERAL TEST REQUIREMENTS		P
21.4 (0.1)	Information for luminaire design considered.....:	Yes ☒ No ☐ Lamp standard:	—
21.4 (0.3)	More sections applicable.....:	Yes ☐ No ☒ Section/s:	—

21.5 (2)	CLASSIFICATION		P
21.5 (2.2)	Type of protection	Class II	P
21.5 (2.3)	Degree of protection.....	IP 44	P
21.5 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces.....:	Yes ☒ No ☐	—
21.5 (2.5)	Luminaire for normal use	Yes ☒ No ☐	—
	Luminaire for rough service	Yes ☐ No ☒	—
21.5.2 (-)	Class II or Class III	Class II	P
21.5.3 (-)	Rope lights for outdoor use shall be IP44 or higher		N/A

21.6 (3)	MARKING		P
21.6 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
21.6 (3.3)	Additional information		P
	Language of instructions		P
21.6 (3.3.1)	Combination luminaires		N/A
21.6 (3.3.2)	Nominal frequency in Hz		N/A
21.6 (3.3.3)	Operating temperature		N/A
21.6 (3.3.4)	Symbol or warning notice		N/A
21.6 (3.3.5)	Wiring diagram		N/A
21.6 (3.3.6)	Special conditions		N/A
21.6 (3.3.7)	Metal halide lamp luminaire – warning		N/A
21.6 (3.3.8)	Limitation for semi-luminaires		N/A
21.6 (3.3.9)	Power factor and supply current		N/A
21.6 (3.3.10)	Suitability for use indoors		P

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.6 (3.3.11)	Luminaires with remote control		N/A
21.6 (3.3.12)	Clip-mounted luminaire – warning		N/A
21.6 (3.3.13)	Specifications of protective shields		N/A
21.6 (3.3.14)	Symbol for nature of supply		N/A
21.6 (3.3.15)	Rated current of socket outlet		N/A
21.6 (3.3.16)	Rough service luminaire		N/A
21.6 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments		P
21.6 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
21.6 (3.3.19)	Protective conductor current in instruction if applicable		N/A
21.6 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
21.6 (3.3.21)	Non replaceable and non-user replaceable light sources information provided		N/A
	Cautionary symbol		N/A
21.6 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
21.6 (3.4)	Test with water		P
	Test with hexane		P
	Legible after test		P
	Label attached		P
21.6.2 (-)	Rope light marking		N/A
	Rated voltage and wattage marked on the rope light		N/A
	Durable non-removable label if information on the cable		N/A
21.6.3 (-)	Rope light and packing marking		P
	Marking if only for indoor use		P
21.6.4 (-)	Marking on the packing or instructions		P
	Marking a) – e)		P

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7 (4)	CONSTRUCTION		P
21.7 (4.2)	Components replaceable without difficulty		N/A
21.7 (4.3)	Wireways smooth and free from sharp edges		P
21.7 (4.4)	Lampholders		N/A
21.7 (4.4.1)	Integral lampholder		N/A
21.7 (4.4.2)	Wiring connection		N/A
21.7 (4.4.3)	Lampholder for end-to-end mounting		N/A
21.7 (4.4.4)	Positioning		N/A
	- pressure test (N)		—
	After test the lampholder comply with relevant standard sheets and show no damage		N/A
	After test on single-capped lampholder the lampholder have not moved from its position and show no permanent deformation		N/A
	- bending test (N)		—
	After test the lampholder have not moved from its position and show no permanent deformation		N/A
21.7 (4.4.5)	Peak pulse voltage		N/A
21.7 (4.4.6)	Centre contact		N/A
21.7 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
21.7 (4.4.8)	Lamp connectors		N/A
21.7 (4.4.9)	Caps and bases correctly used		N/A
21.7 (4.4.10)	Light source for lampholder or connection according IEC 60061 not connected another way		N/A
21.7 (4.5)	Starter holders		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
21.7 (4.7)	Terminals and supply connections		N/A
21.7 (4.7.1)	Contact to metal parts		N/A
21.7 (4.7.2)	Test 8 mm live conductor		N/A
	Test 8 mm earth conductor		N/A
21.7 (4.7.3)	Terminals for supply conductors		N/A
21.7 (4.7.3.1)	Welded method and material		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		N/A
	- electrical test according to 15.6.3		N/A
	- heat test according to 15.6.2.3 and 15.6.2.4		N/A
21.7 (4.7.4)	Terminals other than supply connection		N/A
21.7 (4.7.5)	Heat-resistant wiring/sleeves		N/A
21.7 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A
21.7 (4.8)	Switches		P
	- adequate rating		P
	- adequate fixing		P
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		P
21.7 (4.9)	Insulating lining and sleeves		N/A
21.7 (4.9.1)	Retainment		N/A
	Method of fixing.....:		N/A
21.7 (4.9.2)	Insulated linings and sleeves:		N/A
	Resistant to a temperature > 20 °C to the wire temperature or		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C).....:		N/A
21.7 (4.10)	Double or reinforced insulation		P
21.7 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		N/A
	Safe installation fixed luminaires		N/A
	Capacitors and switches		N/A
	Interference suppression capacitors according to IEC 60384-14		N/A
21.7 (4.10.2)	Assembly gaps:		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- not coincidental		N/A
	- no straight access with test probe		N/A
21.7 (4.10.3)	Retainment of insulation:		P
	- fixed		P
	- unable to be replaced; luminaire inoperative		P
	- sleeves retained in position		N/A
	- lining in lampholder		N/A
21.7 (4.11)	Electrical connections and current-carrying parts		P
21.7 (4.11.1)	Contact pressure		P
21.7 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
21.7 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
21.7 (4.11.4)	Material of current-carrying parts		P
21.7 (4.11.5)	No contact to wood or mounting surface		P
21.7 (4.11.6)	Electro-mechanical contact systems		N/A
21.7 (4.12)	Screws and connections (mechanical) and glands		N/A
21.7 (4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
21.7 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
21.7 (4.12.4)	Locked connections:		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- fixed arms; torque (Nm)..... :		N/A
	- lampholder; torque (Nm)..... :		N/A
	- push-button switches; torque 0,8 Nm..... :		N/A
21.7 (4.12.5)	Screwed glands; force (Nm)..... :		N/A
21.7 (4.13)	Mechanical strength		P
21.7 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm)..... :		N/A
	- other parts; energy (Nm)..... :		P
	1) live parts		N/A
	2) linings		N/A
	3) protection		N/A
	4) covers		N/A
21.7 (4.13.3)	Straight test finger		N/A
21.7 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
21.7 (4.13.6)	Tumbling barrel		N/A
21.7 (4.14)	Suspensions, fixings and means of adjusting		P
21.7 (4.14.1)	Mechanical load:		P
	A) four times the weight		P
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm)..... :		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Metal rod. diameter (mm)		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
21.7 (4.14.2)	Load to flexible cables		N/A
	Mass (kg)		—
	Stress in conductors (N/mm ²)		N/A
	Mass (kg) of semi-luminaire		N/A
	Bending moment (Nm) of semi-luminaire		N/A
21.7 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles.....		N/A
	- strands broken.....		N/A
	- electric strength test afterwards		N/A
21.7 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
21.7 (4.14.5)	Guide pulleys		N/A
21.7 (4.14.6)	Strain on socket-outlets		N/A
21.7 (4.15)	Flammable materials		N/A
	- glow- wire test 650°C.....		N/A
	- spacing ≥30 mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		N/A
	- thermal protection		N/A
	- electronic circuits exempted		N/A
21.7 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
21.7 (4.16)	Luminaires for mounting on normally flammable surfaces		P
	No lamp control gear.....	(compliance with Section 12)	N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
21.7 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
21.7 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
21.7 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
21.7 (4.18)	Resistance to corrosion		N/A
21.7 (4.18.1)	- rust-resistance		N/A
21.7 (4.18.2)	- season cracking in copper		N/A
21.7 (4.18.3)	- corrosion of aluminium		N/A
21.7 (4.19)	Ignitors compatible with ballast		N/A
21.7 (4.20)	Rough service vibration		N/A
21.7 (4.21)	Protective shield		N/A
21.7 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A
21.7 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
21.7 (4.21.3)	No direct path		N/A
21.7 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment.....:	See Test Table 21.16 (13.3.2)	N/A
21.7 (4.22)	Attachments to lamps not cause overheating or damage		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7 (4.23)	Semi-luminaires comply Class II		N/A
21.7 (4.24)	Photobiological hazards		P
21.7 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
21.7 (4.24.2)	Retinal blue light hazard		N/A
	Luminaires with E_{thr} :		N/A
	a) Fixed luminaires	RG0	P
	- distance x m, borderline between RG1 and RG2... :		N/A
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		N/A
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
21.7 (4.25)	Mechanical hazard		P
	No sharp point or edges		P
21.7 (4.26)	Short-circuit protection		N/A
21.7 (4.26.1)	Adequate means of uninsulated accessible SELV parts		N/A
21.7 (4.26.2)	Short-circuit test with test chain according 4.26.3		N/A
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
21.7 (4.27)	Terminal blocks with integrated screwless earthing contacts		N/A
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Voltage drop test, resistance < 0,05 Ω		N/A
21.7 (4.28)	Fixing of thermal sensing control		N/A
	Not plug-in or easily replaceable type		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material (°C)..... :		—
	100 cycles between t min and t max		N/A
	Temperature sensing control still in position		N/A
21.7 (4.29)	Luminaires with non-replaceable light source		N/A
	Not possible to replace light source		N/A
	Live part not accessible after parts have been opened by hand or tools		N/A
21.7 (4.30)	Luminaires with non-user replaceable light source		P
	If protective cover provide protection against electric shock and marked with “caution, electric shock risk” symbol:		N/A
	Minimum two fixing means		N/A
21.7 (4.31)	Insulation between circuits		P
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		P
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
21.7 (4.31.1)	SELV circuits		P
	Used SELV source		P
	Voltage ≤ ELV		P
	Insulating of SELV circuits from LV supply		P
	Insulating of SELV circuits from other non SELV circuits		N/A
	Insulating of SELV circuits from FELV		N/A
	Insulating of SELV circuits from other SELV circuits		N/A
	SELV circuits insulated from accessible parts according Table X.1		P
	Plugs not able to enter socket-outlets of other voltage systems		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
21.7 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage $\leq$ ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to enter socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets does not have protective conductor contact		N/A
21.7 (4.31.3)	Other circuits		N/A
	Other circuits insulated from accessible parts according Table X.1		N/A
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
21.7 (4.32)	Overvoltage protective devices		N/A
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		
	- only in fixed luminaires		N/A
	- only connected to protective earth		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7.2 (-)	Terminal blocks		N/A
	Clause 4.6 of IEC 60598-1 referring to terminal blocks does not apply		—
21.7.3 (-)	Terminals and supply connections		N/A
	Comply with Annex A		N/A
21.7.4 (-)	Control units		P
	Forming an integral part enclosed in non-flammable insulating material tested according 21.16		P
	Securely fixed to the cable		P
	Electronic control device comply with IEC 61347-2-11		P
	LED driver comply with IEC 61347-2-13		N/A
21.7.5 (-)	Mechanical strength		-
	a) Rigid rope lights		Not checked
	1) Pull test: force 60 N		Not checked
	2) Torque test: torque 0,15 Nm		Not checked
	b) Flexible rope lights		Not checked
	1) Pull test: force 60 N		Not checked
	2) Torque test: torque 0,15 Nm		Not checked
	3) Cylinder 150 mm at 10 times at 25 °C ± 2 °C		Not checked
	For rope lights having an IP number over X0 Additionally: Cylinder 150 mm at 10 times at -15 °C ± 2 °C		Not checked

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	4) Mandrel of between 4 and 5 times the diameter of test piece		Not checked
	c) Impact test at low temperature of -15 °C ± 5 °C		Not checked

21.8 (11)	CREEPAGE DISTANCES AND CLEARANCES		P
21.8 (11.2)	Creepage distances and clearances.....:	See Table 21.8 (11.2)	P
	Working voltage (V).....:		—
	Rated pulse voltage (kV).....:		—
	Voltage form.....:	Sinusoidal ☒ Non-sinusoidal ☐	—
	PTI.....:	< 600 ☒ ≥ 600 ☐	—
	Impulse withstand category (Normal category II) (Category III Annex U)	Category II ☒ Category III ☐	—

21.10 (14)	SCREW TERMINALS		N/A
	Separately approved; component list	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 3)	N/A

21.10 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		N/A
	Separately approved; component list.....:	(see Annex 1)	N/A
	Part of the luminaire.....:	(see Annex 4)	N/A

21.11 (5)	EXTERNAL AND INTERNAL WIRING		P
21.11 (5.2)	Supply connection and external wiring		P
21.11 (5.2.1)	Means of connection.....:		P
	Outdoor luminaire has not PVC insulated external wiring if not class III or SELV ≤ 25 V a.c./60 V d.c. or protected from outdoor environment		N/A
21.11 (5.2.2)	Type of cable.....:	Replaced by 21.11.2	—
	Nominal cross-sectional area (mm²).....:	Replaced by 21.11.2	—

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Cables equal to IEC 60227 or IEC 60245	Replaced by 21.11.2	—
21.11 (5.2.3)	Type of attachment, X, Y or Z		P
21.11 (5.2.5)	Type Z not connected to screws		N/A
21.11 (5.2.6)	Cable entries:		N/A
	- suitable for introduction		N/A
	- adequate degree of protection		N/A
21.11 (5.2.7)	Cable entries through rigid material have rounded edges		N/A
21.11 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
21.11 (5.2.9)	Locking of screwed bushings		N/A
21.11 (5.2.10)	Cord anchorage:		N/A
	- covering protected from abrasion		N/A
	- clear how to be effective		N/A
	- no mechanical or thermal stress		N/A
	- no tying of cables into knots etc.		N/A
	- insulating material or lining		N/A
21.11 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
21.11 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment	Type Y	P
21.11 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe		P
	- pull test: 25 times; pull (N)..... : 60N		P
	- torque test: torque (Nm)..... : 0.25Nm		P
	- displacement ≤ 2 mm	0.13mm	P
	- no movement of conductors		P
	- no damage of cable or cord		P
	- function independent of electrical connection		N/A
21.11 (5.2.11)	External wiring passing into luminaire		N/A
21.11 (5.2.12)	Looping-in terminals		N/A
21.11 (5.2.13)	Wire ends not tinned		P
	Wire ends tinned: no cold flow		N/A
21.11 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A
21.11 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Other appliance inlet or connector according relevant IEC standard		N/A
21.11 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
21.11 (5.2.18)	Used plug in accordance with		N/A
	- IEC 60083		N/A
	- other standard		N/A
21.11 (5.3)	Internal wiring		P

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.11 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A)..... :		N/A
	- temperatures..... : (see Annex 2)		N/A
	Green- yellow for earth only		N/A
21.11 (5.3.1.1)	Internal wiring connected directly to fixed wiring		N/A
	Cross-sectional area (mm ²)..... :		N/A
	Insulation thickness		N/A
	Extra insulation added where necessary		N/A
21.11 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		N/A
	Adequate cross-sectional area and insulation thickness		N/A
21.11 (5.3.1.3)	Double or reinforced insulation for class II		N/A
21.11 (5.3.1.4)	Conductors without insulation		N/A
21.11 (5.3.1.5)	SELV current-carrying parts		P
21.11 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
21.11 (5.3.2)	Sharp edges etc.		N/A
	No moving parts of switches etc.		N/A
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		N/A
21.11 (5.3.3)	Insulating bushings:		N/A
	- suitable fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- cables with protective sheath		N/A
21.11 (5.3.4)	Joints and junctions effectively insulated		N/A
21.11 (5.3.5)	Strain on internal wiring		N/A
21.11 (5.3.6)	Wire carriers		N/A
21.11 (5.3.7)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		N/A
21.11.2 (-)	Cables for rope lights		P
	Type of cable.....:	Mix rubber	P
	Cables not lighter than IEC 60227 or IEC 60245 for class II rope lights	IEC 60245	P
	Cables not lighter than insulation according to 5.3.1 of part 1 for class III rope lights		N/A
	Nominal cross-sectional area (mm ²).....:	2×0.15 mm ²	P
	Mechanical properties according 4.14.1 and 4.14.2 of part 1		P
21.11.3 (-)	Cord anchorage test		N/A
	Pull test 30 N 25 times on single-core cable		N/A
21.11.4 (-)	Plugs and cable length		N/A
	Splash-proof plug or permanent connection if for outdoor use		N/A
	Length of the cable between the plug and the connection to the rope light not less than 1,5 m		N/A
21.11.5 (-)	Maximum length of extendable class II rope lights		N/A
	Maximum length 100 m for 0,5 mm ² cable		N/A
	Maximum length 150 m for 0,75 mm ² cable		N/A
21.12 (8)	PROTECTION AGAINST ELECTRIC SHOCK		P
21.12 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		N/A
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		P
	Lamp and starterholders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N/A
	Basic insulation only accessible under lamp or starter replacement		N/A
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		P
	Double-ended high pressure discharge lamp		N/A
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
21.12 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
21.12 (8.2.3.a)	Class II luminaire:		N/A
	- basic insulated metal parts not accessible during starter or lamp replacement		N/A
	- basic insulation not accessible other than during starter or lamp replacement		N/A
	- glass protective shields not used as supplementary insulation		N/A
21.12 (8.2.3.b)	BC lampholder of metal in class I luminaires shall be earthed		N/A
21.12 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- touch current		N/A
	- no-load voltage.....		N/A
	Other than ordinary luminaire:		N/A
	- nominal voltage		N/A
21.12 (8.2.4)	Portable luminaire have protection independent of supporting surface		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.12 (8.2.5)	Compliance with the standard test finger or relevant probe		P
21.12 (8.2.6)	Covers reliably secured		P
21.12 (8.2.7)	Discharging of capacitors $\geq 0,5 \mu\text{F}$	No capacitors used	N/A
	Portable plug connected luminaire with capacitor		N/A
	Other plug connected luminaire with capacitor		N/A
	Discharge device on or within capacitor		N/A
	Discharge device mounted separately		N/A

21.13 (12)	ENDURANCE TEST AND THERMAL TEST		P
21.13.1 (-)	If IP > IP 20 relevant test of (12.4), (12.5) and (12.6) after (9.2) before (9.3) specified in 21.14		N/A
21.13 (12.3)	Endurance test:		P
	- mounting- position..... :	Normal mounting	—
	- test temperature (°C)..... :		—
	- total duration (h)..... :		—
	- supply voltage: Un factor; calculated voltage (V)... :		—
	- lamp used..... :		—
21.13 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P
21.13 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
21.13 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	P
21.13 (12.6)	Thermal test (failed lamp control gear condition):		N/A
21.13 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		—
	- case of abnormal conditions..... :		—
	- electronic lamp control gear		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- measured winding temperature (°C): at 1,1 Un		—
	- measured mounting surface temperature (°C) at 1,1 Un.....:		N/A
	- calculated mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
21.13 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions.....:		—
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C).....:		N/A
	- track-mounted luminaires		N/A
21.13 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N/A
21.13 (12.7.1)	Luminaire without temperature sensing control		N/A
21.13 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N/A
	Test method 12.7.1.1 or Annex W		—
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions.....:		—
	- Ballast failure at supply voltage (V)		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions.....:		—
	- measured winding temperature (°C): at 1,1 Un.....:		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un.....:		—
	- calculated temperature of fixing point/exposed part (°C).....:		—
	Ball-pressure test.....:	See Table 21.16 (13.2.1)	N/A
21.13 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- case of abnormal conditions.....:		—
	- measured winding temperature (°C): at 1,1 Un.....:		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un.....:		—
	- calculated temperature of fixing point/exposed part (°C).....:		—
	Ball-pressure test.....:	See Table 21.16 (13.2.1)	N/A
21.13 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N/A
	- case of abnormal conditions.....:		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
21.13 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link.....:	Yes ☐ No ☐	—
	- manual reset cut-out.....:	Yes ☐ No ☐	—
	- auto reset cut-out.....:	Yes ☐ No ☐	—
	- case of abnormal conditions.....:		—
	- highest measured temperature of fixing point/ exposed part (°C):.....:		—
	Ball-pressure test.....:	See Table 21.16 (13.2.1)	N/A
21.13.2 (-)	Test voltage		N/A
	Provision of 12.3.1 d) of part 1 and if class III rope lights 1,1 x rated voltage of transformer/convertor		—
	Provision of 12.4.1 d) of part 1 and if class III rope lights 1,06 x rated voltage of transformer/convertor		—
21.13.3 (-)	Short-circuit test of rectifier		P
	No emission of flames or molten material or production of flammable gases and no live parts accessible when short-circuit output of the rectifier		P

21.14 (9)	RESISTANCE TO DUST, SOLID OBJECTS AND MOISTURE		P
21.14 (-)	If IP > IP 20 the order of tests as specified in clause 21.13		—
21.14 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP.....:	IP 44	—

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- mounting position during test.....:		—
	- fixing screws tightened; torque (Nm).....:		—
	- tests according to clauses.....:		—
	- electric strength test afterwards		P
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		N/A
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		P
	d) i) For luminaires without drain holes – no water entry		P
	d) ii) For luminaires with drain holes – no hazardous water entry		N/A
	e) no water in watertight luminaire		N/A
	e) no contact with live parts (IP 2X)		N/A
	e) no entry into enclosure (IP 3X and IP 4X)		P
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		N/A
	f) no trace of water on part of lamp requiring protection from splashing water		N/A
	g) no damage of protective shield or glass envelope		N/A
21.14 (9.3)	Humidity test 48 h		P

21.15 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
21.15 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø		—
	Insulation resistance (MΩ).....:		—
	SELV		P
	- between current-carrying parts of different polarity:	>100 MΩ	P
	- between current-carrying parts and mounting surface.....:	>100 MΩ	P
	- between current-carrying parts and metal parts of the luminaire.....:		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
	Other than SELV		P
	- between live parts of different polarity..... :	>100 MΩ	P
	- between live parts and mounting surface..... :	>100 MΩ	P
	- between live parts and metal parts..... :		N/A
	- between live part and body of lighting chains..... :		N/A
	- between live parts of different polarity through action of a switch..... :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
21.15 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A
	Test voltage (V)..... :		N/A
	SELV		P
	- between current-carrying parts of different polarity:	500V	P
	- between current-carrying parts and mounting surface..... :	500V	P
	- between current-carrying parts and metal parts of the luminaire..... :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
	Other than SELV		P
	- between live parts of different polarity..... :	1480V	P
	- between live parts and mounting surface..... :	2960V	P
	- between live parts and metal parts..... :		N/A
	- between live part and body of lighting chains..... :		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- between live parts of different polarity through action of a switch..... :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
21.15 (10.3)	Touch current or protective conductor current (mA):	Touch current: 0.17mA	P

21.16 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		N/A
21.16 (13.2.1)	Ball-pressure test..... :	See Test Table 21.16 (13.2.1)	N/A
21.16 (13.3.1)	Needle-flame test (10 s)..... :	See Test Table 21.16 (13.3.1)	N/A
21.16 (13.3.2)	Glow- wire test (650°C)..... :	See Test Table 21.16 (13.3.2)	N/A
21.16 (13.4)	Proof tracking test (IEC 60112)..... :	See Test Table 21.16 (13.4)	N/A
20.16 (-)	Flexible pipes of rope lights in compliance with IEC 60811-508		N/A

IEC 60598-2-21							
Clause	Requirement + Test				Result - Remark		Verdict
21.8 (11.2)	TABLE I: Creepage distances and clearances						P
	Minimum distances (mm) for a.c. up to 30 kHz sinusoidal voltages						P
	Applicable part of IEC 60598-1 Table 11.1.A*, 11.1.B* and 11.2*						P
	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:	-	-	-	-	-	-	-
Working voltage (V)..... :					24 V		—
PTI..... :					< 600 ☒ ≥ 600 ☐		—
Pulse voltage or U_P if applicable (kV)					-		—
Supplementary information: Between L and N							
Distance 2:	-	-	-	-	-	-	-
Working voltage (V)..... :					24 V		—
PTI..... :					< 600 ☒ ≥ 600 ☐		—
Pulse voltage or U_P if applicable (kV)					-		—
Supplementary information: Live parts and accessible							
Distance 3:	-	-	-	-	-	-	-
Working voltage (V)..... :					24 V		—
PTI..... :					< 600 ☐ ≥ 600 ☐		—
Pulse voltage or U_P if applicable (kV)							—
Supplementary information: Live parts to mounting surface							

** Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.

21.8 (11.2)	TABLE II: Creepage distances and clearances						N/A
Minimum distances (mm) for a.c. higher than 30 kHz sinusoidal voltages							
Applicable part of IEC 61347-1 Table 7 and 8* or IEC 60664-4 Table 1 and 2							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V)..... :							—
Frequency if applicable (kHz)..... :							—

IEC 60598-2-21							
Clause	Requirement + Test				Result - Remark		Verdict
PTI..... :					< 600 ☐ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV)							—
Supplementary information:							
Distance 2:							
Working voltage (V)..... :							—
Frequency if applicable (kHz)..... :							—
PTI..... :					< 600 ☐ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV)							—
Supplementary information:							
Distance 3:							
Working voltage (V)..... :							—
Frequency if applicable (kHz)..... :							—
PTI..... :					< 600 ☐ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV)							—
Supplementary information:							

** Insulation type: B – Basic; S – Supplementary; R – Reinforced.

21.16 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics				N/A
Allowed impression diameter (mm):			2		—
Object/ Part No./ Material		Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Supplementary information:					

21.16 (13.3.1)	TABLE: Needle-flame test (IEC 60695-11-5)				N/A		
---------------------------	--	--	--	--	------------	--	--

IEC 60598-2-21					
Clause	Requirement + Test		Result - Remark		Verdict
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Supplementary information:					

21.16 (13.3.2)	TABLE: Glow-wire test (IEC 60695-2-11)				N/A
Glow wire temperature :			650°C		—
Object/ Part No./ Material	Manufacturer/ trademark		Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Supplementary information:					

21.16 (13.4)	TABLE: Proof tracking test (IEC 60112)				N/A
Test voltage PTI		175 V			—
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
Supplementary information:					

ANNEX A	Requirements for interconnecting connectors for use in rope lights	N/A
	This Annex A consist relevant requirements and modifications of IEC 61984	N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
5.2	Classification according to protection against electric shock		N/A
	Only enclosed connectors		N/A
5.3	Classification according to the style of connector		N/A
	Only free connectors		N/A
5.4	Classification according to additional characteristics of connectors		N/A
	According b), d), e), f), h), and j)		N/A
6.2.1	Identification		N/A
	According a) and b)		N/A
6.4.1	Non accessibility of live parts		N/A
	Test with test finger on class II rope lights		N/A
6.9.1	Polarisation		N/A
	Improper connection of mating parts is prevented		N/A
	No unsafe compatibility between connectors for class II and class III rope lights of the same manufacturer		N/A
	Male part of class III rope lights not make contact in the female contact of low voltage connectors (e.g. IEC 60320)		N/A
	Manufacturer designed connectors, no unsafe compatibility with systems according IEC 60320 and IEC 60906 and national domestic plug and socket-outlet systems in the country where the rope light is placed on the market		N/A
6.9.3	Connection of conductors		N/A
	Cross sectional area of the contact making part of the interconnecting coupler not less than the corresponding conductor in the interconnected cable		N/A
6.10	Design of a CBC		N/A
	Adequate breaking capacity		N/A
	Female part at the end of the rope light, other than ordinary, provided with sealing device securely fixed to the coupler		N/A
6.13	Dielectric strength		N/A
	Test according clause 21.15 of this standard		N/A
6.14.2	Electrical endurance (CBC)		N/A
	Meet the specified breaking capacity		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Number of cycles 50		—
	Test according 7.3.5		N/A
6.14.3	Bendings (non-rewirable connectors)		N/A
	Meet the specified number of bendings		N/A
	Number of cycles 1000		—
	Test according 7.3.10		N/A
6.17	Cable clamp		N/A
	Test according clause 21.11.3 of this standard		N/A

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	JT-DCxVyW-E4-IP44	PRI: 220 V AC–240 V AC, 50 Hz – 60 Hz / 230V AC-240 V AC; 50Hz / 100V AC-240 V AC 50 Hz – 60 Hz; IP44, Class II, SEC: 2V d.c. to 40 V d.c., Max 7,2W,	EN61347-2-13	SGS GS/21/HEL/01957
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	JT-DCxVyW-A1-IP44	PRI: 220 V AC–240 V AC, 50 Hz – 60 Hz / 230V AC-240 V AC; 50Hz / 100V AC-240 V AC 50 Hz – 60 Hz; IP44, Class II, SEC: 2V d.c. to 40 V d.c., Max 15W,	EN61347-2-13	SGS GS/21/HEL/01511
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	JT-DCxVyW-F5-IP44	PRI: 220 V AC–240 V AC, 50 Hz – 60 Hz / 230V AC-240 V AC; 50Hz / 100V AC-240 V AC 50 Hz – 60 Hz; IP44, Class II, SEC: 2V d.c. to 40 V d.c., Max 10W,	EN61347-2-13	SGS GS/21/HEL/02030
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	JT-DCxVyW-M3-IP44	PRI: 220 V AC–240 V AC, 50 Hz – 60 Hz / 230V AC-240 V AC; 50Hz / 100V AC-240 V AC 50 Hz – 60 Hz; IP44, Class II, SEC: 2V d.c. to 40 V d.c., Max 24W,	EN61347-2-13	SGS GS/21/HEL/02031
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	JT-DCxVyW-H5-IP44	PRI: 220 V AC–240 V AC, 50 Hz – 60 Hz / 230V AC-240 V AC; 50Hz / 100V AC-240 V AC 50 Hz – 60 Hz; IP44, Class II, SEC: 2V d.c. to 40 V d.c., Max 7,2W	EN61347-2-13	SGS GS/21/HEL/01584

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	JT-DCxVyW-L2-IP44	PRI: 220 V AC – 240 V AC, 50 Hz – 60 Hz / 230V AC-240 V AC; 50Hz / 100V AC-240 V AC 50 Hz – 60 Hz; IP44, Class II, SEC: 2V d.c. to 40 V d.c., Max 10W	EN61347-2-13	SGS GS/21/HEL/00596
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	JT-DCxVyW-N2-IP44	PRI: 220 V AC – 240 V AC, 50 Hz – 60 Hz / 230V AC-240 V AC; 50Hz / 100V AC-240 V AC 50 Hz – 60 Hz; IP44, Class II, SEC: 2V d.c. to 40 V d.c., Max 15W,	EN61347-2-13	SGS GS/21/HEL/01313
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	JT-EL/FCxVyW-H9-IP44	PRI: 220 V AC - 240 V AC; 50 Hz - 60 Hz / 230 V AC - 240 V AC; 50 Hz / 100 V AC - 240 V AC; 50 Hz - 60 Hz; SEC: 2 V~ to 40 V~; Max. 7,2 W; IP44, Class II,	EN61347-2-13	SGS GS/21/HEL/01522
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	JT-EL/FCxVyW-G5-IP44	PRI : 220 V AC - 240 V AC; 50 Hz - 60 Hz / 230 V AC - 240 V AC; 50 Hz / 100 V AC - 240 V AC; 50 Hz - 60 Hz; SEC : 2 V a.c. to 40 V a.c.; Max. 10 W; IP44, Class II,	EN61347-2-13	SGS GS/21/HEL/00605
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	JT-EL/FCxVyW-I3-IP44	PRI : 220 V AC - 240 V AC; 50 Hz - 60 Hz / 230 V AC - 240 V AC; 50 Hz / 100 V AC - 240 V AC; 50 Hz - 60 Hz SEC: 2 V a.c. to 40 V a.c.; Max. 15 W; IP44, Class II,	EN61347-2-13	SGS GS/21/HEL/01312

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	JT-EL/FCxVyW-H2-IP44	PRI: 220 V AC - 240 V AC; 50 Hz - 60 Hz / 230 V AC - 240 V AC; 50 Hz / 100 V AC - 240 V AC; 50 Hz - 60 Hz; SEC : 2 V a.c. to 40 V a.c.; Max.10 W; IP44, Class II,	EN61347-2-13	SGS GS/21/HEL/00536
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	EL/FCxVyW-H7-IP44; JT-EL/FCxVyW-H7-IP55	PRI : 220 V AC - 240 V AC; 50 Hz - 60 Hz / 230 V AC - 240 V AC; 50 Hz / 100 V AC - 240 V AC; 50 Hz - 60 Hz SEC: 2 V a.c. to 40 V a.c.; Max. 7,2 W; IP44, IP55, Class II,	EN61347-2-13	SGS GS/21/HEL/01214
LED driver (Alternative)	B	Changzhou Jutai Electronic Co., Ltd.	JT-EL/FCxVyW-BT3-IP44	PRI: 220 V AC - 240 V AC; 50 Hz - 60 Hz / 230 V AC - 240 V AC; 50 Hz / 100 V AC - 240 V AC; 50 Hz - 60 Hz; SEC: 3 V a.c. to 40 V a.c.; Max. 10 W; IP44, Class II,	EN61347-2-13	SGS GS/21/HEL/01250
LED driver (Alternative)	B	Ningbo Golden Power Electronic Co., Ltd.	GP-SWXXXDCYYYY-IP44(ZZ),	Input:100V-240V~/220V-240V~,50Hz/60Hz; Output:3Vdc/ac to 36Vdc/ac,Max7.2 W, IP44 Class II	EN61347-1 EN61347-2-11 EN61347-2-13 EN62493 EK1557-13	SGS GS/23/HEL/00016
LED driver (Alternative)	B	Ningbo Golden Power Electronic Co., Ltd.	GP-SWXXXDCYYYY-IP44(ZZ)-1CZ	Input:100V-240V~/220V-240V~,50Hz/60Hz; Output:3Vdc/ac to 36Vdc/ac,Max7.2 W, IP44 Class II	EN61347-1 EN61347-2-11 EN61347-2-13 EN62493 EK1557-13	SGS GS/23/HEL/00016

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED driver (Alternative)	B	Ningbo Golden Power Electronic Co., Ltd.	GP-SWXXXDCYYYYT-IP44(ZZ)	Input:100V-240V~/220V-240V~,50Hz/60Hz; Output:3Vdc/ac to 36Vdc/ac,Max7.2 W, IP44 Class II	EN61347-1 EN61347-2-11 EN61347-2-13 EN62493 EK1557-13	SGS GS/23/HEL/00016
LED driver (Alternative)	B	Ningbo Golden Power Electronic Co., Ltd.	GP-SWXXXDCYYYY-IP44(ZZ)	Input: 220 V - 240 V; 50 Hz / 60 Hz; Output: 3 V d.c. to 36 V d.c.; Max. 9 W; IP44, Class II	EN61347-1 EN61347-2-11 EN61347-2-13 EN62493	SGS GS/22/HEL/00054
LED driver (Alternative)	B	Ningbo Golden Power Electronic Co., Ltd.	GP-SWXXXDCYYYY-IP44(ZZ)-1CZ	Input: 220 V - 240 V; 50 Hz / 60 Hz; Output: 3 V d.c. to 36 V d.c.; Max. 9 W; IP44, Class II	EN61347-1 EN61347-2-11 EN61347-2-13 EN62493	SGS GS/22/HEL/00054
LED driver (Alternative)	B	Ningbo Golden Power Electronic Co., Ltd.	GP-SWXXXDCYYYYT-IP44(ZZ)	Input: 220 V - 240 V; 50 Hz / 60 Hz; Output: 3 V d.c. to 36 V d.c.; Max. 9 W; IP44, Class II	EN61347-1 EN61347-2-11 EN61347-2-13 EN62493	SGS GS/22/HEL/00054
LED driver (Alternative)	B	Ningbo Golden Power Electronic Co., Ltd.	GP-SWXXXDCYYYY-IP44(ZZ),	Input: 220 V - 240 V; 50 Hz / 60 Hz; Output: 3 V d.c. to 36 V d.c.; Max.12 W; IP44, Class II	EN61347-1 EN61347-2-11 EN61347-2-13 EN62493	SGS GS/22/HEL/00112
LED driver (Alternative)	B	Ningbo Golden Power Electronic Co., Ltd.	GP-SWXXXDCYYYY-IP44(ZZ)-1CZ,	Input: 220 V - 240 V; 50 Hz / 60 Hz; Output: 3 V d.c. to 36 V d.c.; Max.12 W; IP44, Class II	EN61347-1 EN61347-2-11 EN61347-2-13 EN62493	SGS GS/22/HEL/00112

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED driver (Alternative)	B	Ningbo Golden Power Electronic Co., Ltd.	GP-SWXXXDCYYYYT-IP44(ZZ)	Input: 220 V - 240 V; 50 Hz / 60 Hz; Output: 3 V d.c. to 36 V d.c.; Max.12 W; IP44, Class II	EN61347-1 EN61347-2-11 EN61347-2-13 EN62493	SGS GS/22/HEL/00112
LED Driver	B	Changzhou Jutai Electronic Co., Ltd.	JT-DCxVyW-IP44	PRI: 220 V AC–240 V AC, 50 Hz – 60 Hz / 230V AC-240 V AC; 50Hz / 100V AC-240 VAC 50 Hz – 60 Hz; SEC: 2V d.c. to 40 Vd.c., Max 12W, Class II, IP44	EN61347-1 EN61347-2-13 EN62493 EK1557-13	SGS GS/22/HEL/01548
LED Driver	B	Changzhou Jutai Electronic Co., Ltd.	JT-DCxVyW-A2-IP44	PRI: 220 V AC–240 V AC, 50 Hz – 60 Hz / 230V AC-240 V AC; 50Hz / 100V AC-240 VAC 50 Hz – 60 Hz; SEC: 2V d.c. to 40 Vd.c., Max 20W, Class II, IP44	EN61347-1 EN61347-2-13 EN62493 EK1557-13	SGS GS/22/HEL/01122
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS-DxVyWG3DH-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.06 A Output:3-40 V DC; 30-1200 mA;0.6-3.6 W Class II, IP44	EN61347-1 EN61347-2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0001
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS-DxVyWG3DX-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.06 A Output:2-40 V DC; 30-1500 mA;0.6-7.2 W Class II, IP44	EN61347-1 EN61347-2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0001
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS-DxVyWG2DX-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:4.5-40 V DC; 200-2000 mA;7.21-12 W Class II, IP44	EN61347-1 EN61347-2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0001

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- D3V6WG2DX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:3 V DC; 2000 mA;6 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0001
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS-D3.6V 7.2WG2DX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:3.6 V DC; 2000 mA;7.2 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0001
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- D4.5V9WG2DX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:4.5 V DC; 2000 mA;9 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0001
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- DxVyWG3TK-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.06 A Output:3-40 V DC; 30-1200 mA;0.6-3.6 W Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- DxVyWG3TX-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.06 A Output:2-40 V DC; 30-1250 mA;0.6-6 W Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- DxVyWG2TX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.06 A Output:2-40 V DC; 30-1500 mA;0.6-7.2 W Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- DxVyWG2TX-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:4.5-40 V DC; 200-2000 mA;7.21- 12 W Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- D3V6WG2TX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:3 V DC; 2000 mA;6 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- D3.6V7.2WG2TX -IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:3.6 V DC; 2000 mA;7.2 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- D4.5V9WG2TX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:4.5 V DC; 2000 mA;9 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- DxVyWG3CK- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.06 A Output:3-40 V DC; 30-1200 mA;0.6-3.6 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- DxVyWG3CX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.06 A Output:2-40 V DC; 30-1250 mA;0.6-6 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- DxVyWG2CX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.06 A Output:2-40 V DC; 30-1500 mA;0.6-7.2 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- DxVyWG2CX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:4.5-40 V DC; 200-2000 mA;7.21- 12W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- D3V6WG2CX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:3 V DC; 2000 mA;6 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS-D3.6V 7.2WG2CX -IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:3.6 V DC; 2000 mA;7.2 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- D4.5V9WG2CX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:4.5 V DC; 2000 mA;9 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0002
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS-DxVyWG2IT- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.06 A Output:3-40 V DC; 30-1200 mA;0.6-3.6 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0003

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- DxVyWG2ITX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.06 A Output:2-40 V DC; 30-1500 mA;0.6-7.2 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0003
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- DxVyWGITX-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:4.5-40 V DC; 200-2000 mA;7.21- 12W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0003
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- D3V6WGITX-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:3 V DC; 2000 mA;6 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0003
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- D3.6V7.2WGITX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:3.6 V DC; 2000 mA;7.2 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0003
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- D4.5V9WGITX- IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:4.5 V DC; 2000 mA;9 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0003
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS- DxVyWG2IC-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.06 A Output:3-40 V DC; 30-1200 mA;0.6-3.6 W; Class II, IP44	EN61347-1 EN61347- 2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0003

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS-DxVyWG2ICX-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.06 A Output:2-40 V DC; 30-1500 mA;0.6-7.2 W; Class II, IP44	EN61347-1 EN61347-2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0003
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS-DxVyWGICX-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:4.5-40 V DC; 200-2000 mA;7.21-12W; Class II, IP44	EN61347-1 EN61347-2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0003
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS-D3V6WGICX-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:3 V DC; 2000 mA;6 W; Class II, IP44	EN61347-1 EN61347-2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0003
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS-D3.6V 7.2WGICX-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:3.6 V DC; 2000 mA;7.2 W; Class II, IP44	EN61347-1 EN61347-2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0003
LED Driver	B	ZhongShan MLS Power Supply CO., LTD	MLS-D4.5V9WGICX-IPaa	Input:AC 220-240 V , 50/60 Hz; 0.1 A Output:4.5 V DC; 2000 mA;9 W; Class II, IP44	EN61347-1 EN61347-2-13 EN62493 EK1557-13 EK1527-12	TUV Rheinland S 50558890 0003
LED driver (Alternative)	B	Taizhou Sanshan Electrical Appliance Co.,Ltd	23SXXXG***WZD	Input: 220-240 V ~, 50/60 Hz, Class II; Output:3-36 V d.c, Max.2A, Max.15W , IP44	EN61347-1 EN61347-2-13	TUV ZIA 002609 0034 Rev.00

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED driver (Alternative)	B	Taizhou Sanshan Electrical Appliance Co.,Ltd	23SXXXG***WZD 23SXXXB***FZD	Input: 220-240 V ~, 50/60 Hz, Class II; Output:3-36 V d.c, Max.2A, Max.15W , IP44	EN61347-1 EN61347-2-13	TUV UKCA N8AUK 002609 0033 Rev.00 E8AUK002609003 6Rev.00
LED driver (Alternative)	B	Linghai Dingshun Electronic Co.,Ltd	DS-xxxDCaaaa**s- IP44	Input: 220-240 V ~, 50/60 Hz, Class II; Output:3-36 V d.c, Max.1.8A, Max.12W , IP44	EN61347-1 EN61347-2-13	TUV ZIA 003560 0018 Rev.01
LED driver (Alternative)	B	Linghai Dingshun Electronic Co.,Ltd	DS-xxxDCcccc**s- IP44	Input: 220-240 V ~, 50/60 Hz, Class II; Output:3-36 V d.c, Max.1.0A, Max.4.2W , IP44	EN61347-1 EN61347-2-13	TUV ZIA 003560 0018 Rev.01
LED driver (Alternative)	B	Linghai Dingshun Electronic Co.,Ltd	DS-zzzACcccc**s- IP44	Input: 220-240 V ~, 50/60 Hz, Class II; Output:3-36 V d.c, Max.1.0A, Max.4.2W , IP44	EN61347-1 EN61347-2-13	TUV ZIA 003560 0018 Rev.01
LED driver (Alternative)	B	Linghai Dingshun Electronic Co.,Ltd	DS-zzzACaaaa**s- IP44	Input: 220-240 V ~, 50/60 Hz, Class II; Output:3-36 V d.c, Max.1.8A, Max.12W , IP44	EN61347-1 EN61347-2-13	TUV ZIA 003560 0018 Rev.01
LED driver (Alternative)	B	Linghai Dingshun Electronic Co.,Ltd	DS-yyyACbbbb**s- IP44	Input: 220-240 V ~, 50/60 Hz, Class II; Output:24-36 V d.c, Max.0.25A, Max.7.5W , IP44	EN61347-1 EN61347-2-13	TUV ZIA 003560 0018 Rev.01

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED driver (Alternative)	B	Linghai Dingshun Electronic Co.,Ltd	DS-yyyACcccc**s-IP44	Input: 220-240 V ~, 50/60 Hz, Class II; Output:24-36 V d.c, Max.0.18A, Max.4.2W , IP44	EN61347-1 EN61347-2-13	TUV ZIA 003560 0018 Rev.01
LED driver (Alternative)	B	Linghai Dingshun Electronic Co.,Ltd	DS-xxxDCaaaa** BS DS-zzzDCaaaa** BS	Input:220-240V~; 50/60Hz; Output:3-36 V dc or ac; Max.12W; Max. 1,8A; IP44 Class II	BS EN61347-1 BS EN61347-2-13	SGS UKCA SHES2302002032 LM
LED		Zhejiang Feitian Optoelectronic Co.,Ltd	FT#-*@X-§×£	1.8-2.2V,20mA,2.8-3.6V,20mA	LCIE AWO-18MA0363 LTS P-R3	
Alt.		ZHEJIANG XINGZHOU INDUSTRIAL & TRADE	Micro Light-warm white Micro Light-cool white Micro Light-green Micro Light-blue Micro Light ₁ purple Micro Light-pink Micro Light-RGB Micro Light-flash Micro Light-red Micro Light ₁ yellow	1.8-3.2V,5-20mA	LCIE XZV-15AP0164 LT SP-R5	
		Shangyou Jiayi Lighting Product Co., Ltd.	KY04-M-WW, KY04-M-CW, KY04-M-R, KY04-M-G, KY04-M-Y, KY04-M-B, KY04-M-WG, KY04-M-CWT, KY04-TS-RGB, KY04-H-WW, KY04-H-CW, KY04-H-R,KY04-H-GKY04-H ₁ Y,KY04-H-B	3VDC; 20mA	Intertek 200300280 SH A-001	

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
		Shangyou Jiayi Lighting Product Co., Ltd.	KY04-OH-WG	3VDC; 40-60mA	Intertek 200300280 SH A-001	
		ZHONGSHAN CITY GONGYING LIGHTING CO.,LTD	1LED3v	DC 24V ,10mA	LCIE AAHC-ESH ₁ P2111264 0	
-PCB		Tiantai Boda Electron Co.,Ltd			Test with appliance	
Lighting chain single wire		Tiantai Boda Electron Co.,Ltd		0.15 mm ²	Test with appliance	

Supplementary information:

¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.

The codes above have the following meaning:

- A - The component is replaceable with another one, also certified, with equivalent characteristics
- B - The component is replaceable if authorised by the test house
- C - Integrated component tested together with the appliance
- D - Alternative component

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	TABLE: Temperature measurements, thermal tests of Section 12					P	
	Type reference.....:	CBG50-60-24				—	
	Lamp used.....:	LED				—	
	Lamp control gear used.....:	-				—	
	Mounting position of luminaire.....:	Normal mounting				—	
	Supply wattage (W).....:	24 W				—	
	Supply current (A)..... :					—	
	Calculated power factor.....:					—	
	Table: measured temperatures corrected for ta = 25 °C:						
	- abnormal operating mode.....:					—	
	- test 1: rated voltage.....:					—	
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage..... :	1.06×24 Vdc				—	
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage..... :					—	
	- test 4: 1,1 times rated voltage or 1,05 times rated wattage.....:					—	
	Through wiring or looping-in wiring loaded by a current of A during the test :					—	
Temperature measurements, (°C)							
Part	Ambient	Clause 12.4 – normal				Clause 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Supply cord	25	--	25.1	--	90	--	--
Mounting surface	25	--	48.4	--	90	--	--
Supplementary information: /							

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 3	Screw terminals (part of the luminaire)		N/A
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm ²)..... :		—
(14.3.3)	Conductor space (mm)..... :		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread)..... :	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm)..... :		N/A
	Torque (Nm)..... :		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N)..... :		N/A
(14.4.8)	Without undue damage		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 4	Screwless terminals (part of the luminaire)		N/A
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal.....:		—
	Rated current (A).....:		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5)	Terminals and connections for internal wiring		N/A
(15.5.1)	Mechanical tests		N/A
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples).....:		N/A
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples).....:		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples).....:		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A
15.6.2	Mechanical tests		N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)		N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N)		N/A
(15.6.3)	Electrical tests		N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1		N/A

(15.6.3.1) (15.6.3.2)	TABLE: Contact resistance test / Heating tests										N/A
	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop of two inseparable joints										N/A
	Voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV) :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV) :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV) :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											

IEC 60598-2-21											
Clause	Requirement + Test					Result - Remark					Verdict
	Continued ageing: voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV) :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
Supplementary information:											

Attachment No.1**IEC60598_2_1D - ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

ATTACHMENT TO TEST REPORT IEC 60598-2-21
EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES

Luminaires

Part 2: Particular requirements

Section 1: Fixed general purpose luminaires

Differences according to.....: EN 60598-2-21:2015 used in conjunction with
EN IEC 60598-1:2021

Annex Form No.....: EU_GD_ IEC60598_2_21B

Annex Form Originator.....: OVE

Master Annex Form.....: 2014-11

Copyright © 2014 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

	CENELEC COMMON MODIFICATIONS (EN)	N/A
	No Common modifications	N/A

Attachment No.2

EN IEC 62031

Clause	Requirement + Test	Result - Remark	Verdict
13 (14)	FAULT CONDITIONS		P
- (14.1)	In compliance with IEC 61347-1 (clause numbers between parentheses refer to IEC 61347-1)		N/A
	When operated under fault conditions the LED module:		N/A
	- does not emit flames or molten material		N/A
	- does not produce flammable gases		N/A
	- protection against accidental contact not impaired		N/A
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected		N/A
- (14.2)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (except between live parts and accessible metal parts)		N/A
	Creepage distances on printed boards less than specified in clause 16 in Part 1 provided with coating according to IEC 60664- 3		N/A
- (14.3)	Short-circuit or interruption of semiconductor devices		N/A
- (14.4)	Short-circuit across insulation consisting of lacquer, enamel or textile		N/A
- (14.5)	Short-circuit across electrolytic capacitors		N/A
- (14.6)	After the tests has been carried out on three samples:		N/A
	The insulation resistance $\geq 1 \text{ M}\Omega$		N/A
	No flammable gases		N/A
	No accessible parts have become live		N/A
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		N/A
- (14.7)	Relevant fault condition tests with high-power supply		N/A
13.2	Overpower condition		P
	Module withstands overpower condition >15 min.		P
	Module with automatic protective device or power limiter, test performed 15 min. at limit.		N/A
	No fire, smoke or flammable gas is produced		P
	Molten material does not ignite tissue paper, spread below the module		P

Attachment No.3

IEC TR 62778

Clause	Requirement + Test			Result - Remark				Verdict	
Table 6.1	Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)								—
	EN 62471 Photobiological safety of lamps and lamp systems (LED bulb emit white light)								P
Risk	Action spectrum m	Symbol	Units	Emission limits					
				Exempt	Result	Low risk	Result	Mod risk	Result
Actinic UV	S _{UV} (λ)	E _s	mW·m ⁻²	0,001	2.001E-06	0.003	--	--	--
Near UV	--	E _{UVA}	W·m ⁻²	0,33	4.105E-04	33	--	--	--
Blue light	B(λ)	L _B	W·m ⁻² ·sr ⁻¹	100	3.713E+00	10000	--	4000000	--
Blue light, small source	B(λ)	E _B	W·m ⁻²	1,0*	--	--	--	400	--
Retinal thermal	R(λ)	L _R	W·m ⁻² ·sr ⁻¹	28000/α	1.611E+03	1.011E+06	--	71000/α	--
Retinal thermal, weak visual stimulus**	R(λ)	L _{IR}	W·m ⁻² ·sr ⁻¹	545000 0,0017≤ α ≤ 0,011	--				
					--				
IR radiation, eye	--	E _{IR}	W·m ⁻²	6000/α 0,011≤ α ≤ 0,1	0.000E+00	570	--	3200	--
* Small source defined as one with α < 0,011radian. Averaging field of view at 10000 s is 0.1radian. ** Involves evaluation of non-GLS source NOTE 1. Angular subtense of apparent source: α=77.51 mrad 2. Measure distance is 200mm.									
Blue light	B(λ)	LB	W·m ⁻² ·sr ⁻¹	100	3.746E+00	10000	--	4000000	--
NOTE Angular subtense of apparent source: α= 77.51 mrad. Measure distance 200mm.									

Attachment No.4

Product Photos

Details of: Fig. 1



Details of: Fig. 2




Attachment No.4**Product Photos**

Details of: Fig. 3



Details of: Fig. 4

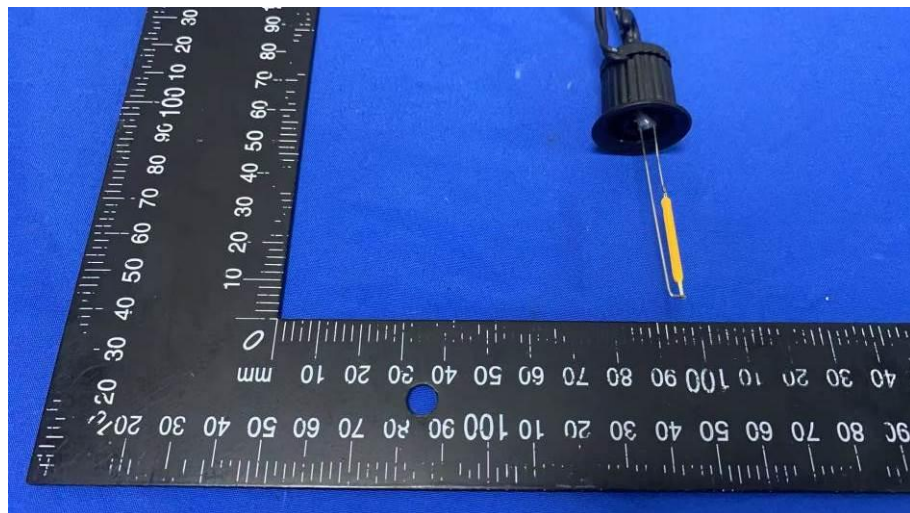


Attachment No.4**Product Photos**Details of: Fig. 5Details of: Fig. 6

Attachment No.4

Product Photos

Details of: Fig. 7

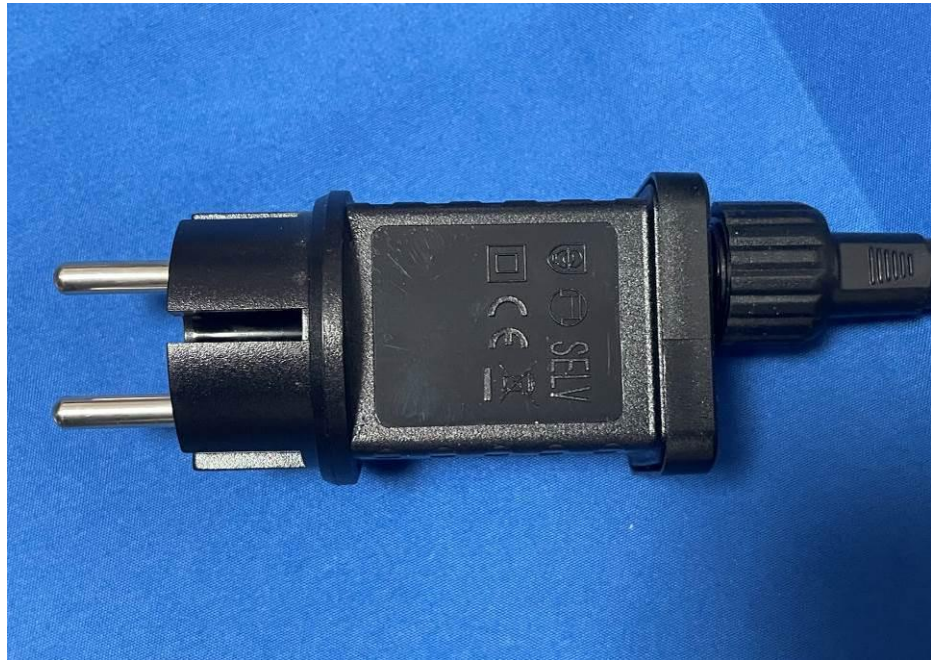

Details of: Fig. 8



Attachment No.4

Product Photos

Details of: Fig. 9




Details of: Fig. 10



Attachment No.4**Product Photos**

Details of: Fig. 11

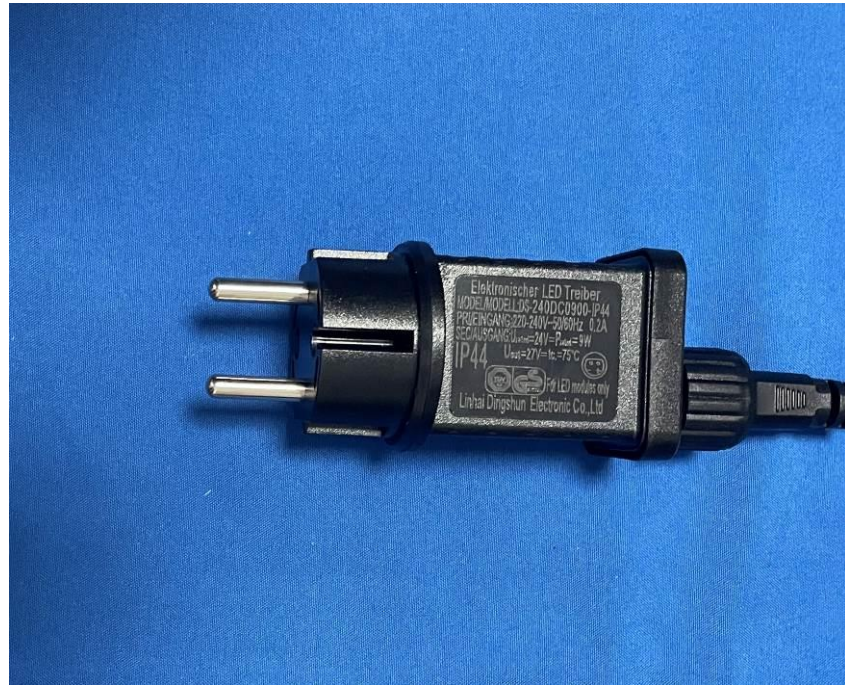

Details of: Fig. 12



Attachment No.4**Product Photos**

Details of: Fig. 13



Details of: Fig. 14



Attachment No.4

Product Photos

Details of: Fig. 15



Details of: Fig. 16



Attachment No.4**Product Photos**

Details of: Fig. 17



Details of: Fig. 18



Attachment No.4

Product Photos

Details of: Fig. 19



- End of test report -