

## EMC TEST REPORT

For

Guangdong Well-born Electric Appliance Co., Ltd.

Electric water heater

Test Model: NDT20E30-4

Additional Model No.: NDT20E50-4, NDT20E80-4, NDT20E100-4, ODT20E30-1,  
ODT20E50-1, ODT20E80-1, ODT20E100-1, ODT20E30-2, ODT20E50-2,  
ODT20E80-2, ODT20E100-2, NDT20E30-5, NDT20E50-5, NDT20E80-5,  
NDT20E100-5

Prepared for : Guangdong Well-born Electric Appliance Co., Ltd.  
Address : No. 15 HuaTian Road, South First Road, Ronggui, Shunde,  
Foshan, Guangdong, China

Prepared by : Shenzhen AOCE Electronic Technology Service Co., Ltd  
Address : Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu  
Industrial Park, Fuhai Street, Baoan District, Shenzhen,  
Guangdong, China

Tel : (86)755-85277785  
Fax : (86)755-23705230  
Web : [Http://www.aoc-cert.com](http://www.aoc-cert.com)  
Mail : [postmaster@aoc-cert.com](mailto:postmaster@aoc-cert.com)

Date of receipt of test sample : May 7, 2025  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : May 7, 2025~May 15, 2025  
Date of Report : May 15, 2025

# **EMC TEST REPORT** **ETSI EN 301 489-17 V3.2.4 (2020-09)**

**Report Reference No. .... : AOC250515108E-R1**

Date Of Issue..... : May 15, 2025

**Testing Laboratory Name..... : Shenzhen AOCE Electronic Technology Service Co., Ltd**

Address..... : Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China

Testing Location/ Procedure..... : Full application of Harmonised standards ☒  
 Partial application of Harmonised standards ☐  
 Other standard testing method ☐

**Applicant's Name..... : Guangdong Well-born Electric Appliance Co., Ltd.**

Address..... : No. 15 HuaTian Road, South First Road, Ronggui, Shunde, Foshan, Guangdong, China

## **Test Specification**

Standard..... : ETSI EN 301 489-1 V2.2.3 (2019-11)  
 ETSI EN 301 489-17 V3.2.4 (2020-09)  
 EN 55032:2015+A1:2020  
 EN 55035:2017+A11:2020  
 EN IEC 55014-1:2021  
 EN IEC 55014-2:2021

Test Report Form No. .... : AOCEMC-1.0

TRF Originator..... : Shenzhen AOCE Electronic Technology Service Co., Ltd

Master TRF..... : Dated 2017-09

## **Shenzhen AOCE Electronic Technology Service Co., Ltd All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen AOCE Electronic Technology Service Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen AOCE Electronic Technology Service Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description..... : Electric water heater**


Trade Mark..... : Well-born

Test Model..... : NDT20E30-4

Ratings..... : AC 220-240V, 50/60Hz, Max.2000W


**Result ..... : Positive**

**Compiled by:**



Johnson Wang/ Administrators

**Supervised by:**



Joey Liu/ Technique principal

**Approved by:**



Murry Yu/ Manager

## EMC -- TEST REPORT

**Test Report No. : AOC250515108E-R1**May 15, 2025

Date of issue

Test Model..... : NDT20E30-4

EUT..... : Electric water heater

**Applicant..... : Guangdong Well-born Electric Appliance Co., Ltd.**Address..... : No. 15 HuaTian Road, South First Road, Ronggui, Shunde,  
Foshan, Guangdong, China

Telephone..... : /

Fax..... : /

**Manufacturer..... : Guangdong Well-born Electric Appliance Co., Ltd.**Address..... : No. 15 HuaTian Road, South First Road, Ronggui, Shunde,  
Foshan, Guangdong, China

Telephone..... : /

Fax..... : /

**Factory..... : Guangdong Well-born Electric Appliance Co., Ltd.**Address..... : No. 15 HuaTian Road, South First Road, Ronggui, Shunde,  
Foshan, Guangdong, China

Telephone..... : /

Fax..... : /

**Test Result****Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

This report was based on the original report AOC250515108E, only following items are revised, when this report issued, the original report will be withdraw:

1.Models increase

## TABLE OF CONTENTS

## Test Report Description

## Page

<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
1.1. PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	6
1.3. RELATED SUBMITTAL(S)/GRANT(S) .....	6
1.4. TEST METHODOLOGY .....	6
1.6. SUPPORT EQUIPMENT LIST .....	6
1.7. EXTERNAL I/O .....	6
1.8. LIST OF MEASURING EQUIPMENT .....	7
1.9. MEASUREMENT UNCERTAINTY .....	9
1.10. DESCRIPTION OF TEST MODES .....	9
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>3. LINE CONDUCTED EMISSION .....</b>	<b>11</b>
3.1. CONDUCTED EMISSION LIMIT .....	11
3.2. TEST CONFIGURATION .....	11
3.3. EMI TEST RECEIVER SETUP .....	12
3.4. TEST PROCEDURE .....	12
3.5. TEST DATA .....	13
<b>4. RADIATED DISTURBANCE .....</b>	<b>14</b>
4.1. RADIATED EMISSION LIMIT .....	14
4.2. TEST CONFIGURATION .....	15
4.3. TEST PROCEDURE .....	16
4.4. TEST DATA .....	17
<b>5. HARMONIC CURRENT EMISSIONS .....</b>	<b>20</b>
5.1. TEST CONFIGURATION .....	20
5.2. TEST STANDARD .....	20
5.3. TEST DATA .....	20
<b>6. VOLTAGE FLUCTUATION AND FLICKER .....</b>	<b>21</b>
6.1. TEST CONFIGURATION .....	21
6.2. TEST STANDARD .....	21
6.3. TEST DATA .....	21
<b>7. GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST .....</b>	<b>22</b>
7.1. PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA APPLIED TO TRANSMITTER (CT) .....	22
7.2. PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA APPLIED TO TRANSMITTER (TT) .....	22
7.3. PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA APPLIED TO RECEIVER (CR) .....	22
7.4. PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA APPLIED TO RECEIVER (TR) .....	22
<b>8. RF ELECTROMAGNETIC FIELD (80 MHZ - 6000 MHZ) .....</b>	<b>24</b>
8.1. TEST CONFIGURATION .....	24
8.2. TEST STANDARD .....	25
8.3. SEVERITY LEVEL .....	25
8.4. TEST PROCEDURE .....	25
8.5. TEST RESULT .....	26
<b>9. ELECTROSTATIC DISCHARGE .....</b>	<b>27</b>
9.1. TEST CONFIGURATION .....	27
9.2. TEST PROCEDURE .....	27
9.3. TEST DATA .....	28
<b>10. ELECTRICAL FAST TRANSIENT IMMUNITY .....</b>	<b>30</b>
10.1. TEST CONFIGURATION .....	30
10.2. TEST STANDARD .....	30
10.3. TEST PROCEDURE .....	30
10.4. TEST DATA .....	30

<b>11. RF COMMON MODE .....</b>	<b>32</b>
11.1. TEST CONFIGURATION .....	32
11.2. TEST STANDARD .....	32
11.3. TEST PROCEDURE .....	33
11.4. TEST DATA .....	33
<b>12. SURGES, LINE TO LINE AND LINE TO GROUND .....</b>	<b>35</b>
12.1. TEST CONFIGURATION .....	35
12.2. TEST STANDARD .....	35
12.3. TEST PROCEDURE .....	35
12.4. TEST DATA .....	36
<b>13. VOLTAGE DIPS/INTERRUPTIONS IMMUNITY TEST .....</b>	<b>37</b>
13.1. TEST CONFIGURATION .....	37
13.2. TEST STANDARD .....	37
13.3. TEST PROCEDURE .....	37
13.4. TEST DATA .....	38
<b>14. SETUP PHOTOGRAPHS .....</b>	<b>39</b>
<b>15. EUT PHOTOGRAPHS .....</b>	<b>40</b>

# 1. GENERAL INFORMATION

## 1.1. Product Description for Equipment Under Test (EUT)

EUT	: Electric water heater
Test Model	: NDT20E30-4
Model No. List	NDT20E30-4, NDT20E50-4, NDT20E80-4, NDT20E100-4, ODT20E30-1, ODT20E50-1, ODT20E80-1, ODT20E100-1, ODT20E30-2, ODT20E50-2, ODT20E80-2, ODT20E100-2, NDT20E30-5, NDT20E50-5, NDT20E80-5, NDT20E100-5
Hardware Version	: V1.0
Software Version	: V1.0

### WIFI (2.4G Band)

Frequency Range	: 2412-2472MHz for HT20 2422-2462MHz for HT40
Channel Spacing	: 5MHz
Channel Number	: 13 Channel for 802.11b,g,n(HT20) 9 Channel for 802.11n(HT40)
Modulation Type	: 802.11b: DSSS; 802.11g/n: OFDM
Antenna Type	: PIFA Antenna, 1.5dBi

## 1.3. Related Submittal(s)/Grant(s)

No Related Submittals.

## 1.4. Test Methodology

All measurements contained in this report were conducted with ETSI EN 301 489-1 V2.2.3 (2019-11), ETSI EN 301 489-17 V3.2.4 (2020-09), EN 55032:2015 and EN 55035: 2017.

## 1.6. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

## 1.7. External I/O

I/O Port Description	Quantity	Cable
--	--	--

## 1.8. List Of Measuring Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	X-series USB Peak and Average Power Sensor Aglient	Agilent	U2021XA	MY54080022	2024-10-26	2025-10-25
2	4 CH. Simultaneous Sampling 14 Bits 2MS/s	Agilent	U2531A	MY54080016	2024-10-26	2025-10-25
3	Test Software	Ascentest	AT890-SW	20160630	N/A	N/A
4	RF Control Unit	Ascentest	AT890-RFB	N/A	2024-10-26	2025-10-25
5	ESA-E SERIES SPECTRUM ANALYZER	Agilent	E4407B	MY41440754	2024-10-26	2025-10-25
6	MXA Signal Analyzer	Agilent	N9020A	MY49100040	2024-10-26	2025-10-25
7	SPECTRUM ANALYZER	R&S	FSP	100503	2024-10-26	2025-10-25
8	MXG Vector Signal Generator	Agilent	N5182A	MY47071151	2024-10-26	2025-10-25
9	ESG VECTOR SIGNAL GENERATOR	Agilent	E4438C	MY42081396	2024-10-26	2025-10-25
10	PSG Analog Signal Generator	Agilent	E8257D	MY4520521	2024-10-26	2025-10-25
11	Universal Radio Communication Tester	R&S	CMU 200	105788	2024-10-26	2025-10-25
12	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2024-10-26	2025-10-25
13	RF Control Unit	Tonscend	JS0806-1	N/A	2024-10-26	2025-10-25
14	DC Power Supply	Agilent	E3642A	N/A	2024-10-26	2025-10-25
15	LTE Test Software	Tonscend	JS1120-1	N/A	N/A	N/A
16	Temperature & Humidity Chamber	GUANGZHOU GOGNWNEN	GDS-100	70932	2024-10-26	2025-10-25
17	DC Source	CHROMA	62012P-80-60	34782951	2024-10-26	2025-10-25
18	RF Filter	Micro-Tronics	BRC50718	S/N-017	2024-10-26	2025-10-25
19	RF Filter	Micro-Tronics	BRC50719	S/N-011	2024-10-26	2025-10-25
20	RF Filter	Micro-Tronics	BRC50720	S/N-011	2024-10-26	2025-10-25
21	RF Filter	Micro-Tronics	BRC50721	S/N-013	2024-10-26	2025-10-25
22	RF Filter	Micro-Tronics	BRM50702	S/N-195	2024-10-26	2025-10-25
23	Splitter/Combiner	Micro-Tronics	PS2-15	CB11-20	2024-10-26	2025-10-25
24	Splitter/Combiner	Micro-Tronics	CB11-20	N/A	2024-10-26	2025-10-25
25	Attenuator	Micro-Tronics	PAS-8-10	S/N23466	2024-10-26	2025-10-25
26	Exposure Level Tester	Narda	ELT-400	N-0713	2024-10-26	2025-10-25
27	B-Field Probe	Narda	ELT-400	M-1154	2024-10-26	2025-10-25
28	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2024-10-26	2025-10-25
29	Positioning Controller	MF	MF-7082	/	2024-10-26	2025-10-25
30	EMI Test Software	AUDIX	E3	N/A	2024-10-26	2025-10-25
31	EMI Test Receiver	R&S	ESR 7	101181	2024-10-26	2025-10-25
32	AMPLIFIER	QuieTek	QTK-A2525G	CHM10809065	2024-10-26	2025-10-25
33	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2024-10-26	2025-10-25
34	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2024-10-26	2025-10-25
35	Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1925	2024-10-26	2025-10-25
36	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2024-10-26	2025-10-25
37	Broadband Preamplifier	SCHWARZBECK	BBV 9719	9719-025	2024-10-26	2025-10-25
38	RF Cable-R03m	Jye Bao	RG142	CB021	2024-10-26	2025-10-25
39	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2024-10-26	2025-10-25

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
40	Artificial Mains	R&S	ENV216	101288	2024-10-26	2025-10-25
41	Power Analyzer Test System	Voltech	PM6000	20000670053	2024-10-26	2025-10-25
42	ESD Simulator	SCHLODER	SESD 230	604035	2024-10-26	2025-10-25
43	RF POWER AMPLIFIER	OPHIR	5225R	1052	N/A	N/A
44	RF POWER AMPLIFIER	OPHIR	5273F	1019	N/A	N/A
45	Stacked Broadband Log Periodic Antenna	SCHWARZBECK	STLP 9128	9128ES-145	N/A	N/A
46	Stacked Mikrowellen Log.-Per Antenna	SCHWARZBECK	STLP 9149	9149-482	N/A	N/A
47	Electric field probe	Narda S.TS./PMM	EP601	611WX80208	2024-10-26	2025-10-25
48	Power Meter	Agilent	E4419B	MY45104493	2024-10-26	2025-10-25
49	Power Sensor	Agilent	E9301H	MY41495234	2024-10-26	2025-10-25
50	Power Sensor	Agilent	E4412A	MY41500229	2024-10-26	2025-10-25
51	Sound Level meter	BK Precision	735	73500873100	2024-10-26	2025-10-25
52	Audio Analyzer	R&S	UPV	1146.2003K0	2024-10-26	2025-10-25
53	Mouse Simulation	Bruel & Kjaer	4227	A0304216	2024-10-26	2025-10-25
54	Ear Simulation and supply	Bruel & Kjaer	2669.4182.5935	A0305284	2024-10-26	2025-10-25
55	Acoustical Calibrators	Bruel & Kjaer	4231	A0304215	2024-10-26	2025-10-25
56	Immunity Simulative Generator	EM TEST	UCS500-M4	0101-34	2024-10-26	2025-10-25
57	Simulator	FRANKONIA	CIT-10	A126A1195	2024-10-26	2025-10-25
58	CDN	FRANKONIA	CDN-M2	5100100100	2024-10-26	2025-10-25
59	CDN	FRANKONIA	CDN-M3	0900-11	2024-10-26	2025-10-25
60	Attenuator	FRANKONIA	ATT6	0010222A	2024-10-26	2025-10-25
61	Infuse tongs	EM TEST	EM-Clamp	0513A031201	2024-10-26	2025-10-25
62	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2024-10-26	2025-10-25



## 1.9. Measurement Uncertainty

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.1dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.08dB	Polarize: H
	2.56dB	Polarize: V
Uncertainty for radio frequency	0.01ppm	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.2℃	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.06%	

## 1.10. Description Of Test Modes

There was 3 test Modes. TM1 to TM3 were shown below:

- TM1** : Operate in WIFI mode;  
**TM2** : Heating normal operation mode;  
**TM3** : Idle mode

\*\*\*Note:

1. All test modes were tested, but we only recorded the worst case in this report.

## 2. SUMMARY OF TEST RESULTS

Rule	Description of Test Items	Result
§7.1	Reference to clause 8.4 of ETSI EN 301 489-1 Conducted Emission (AC mains input/output port)	Compliant
§7.1	Reference to clause 8.3 of ETSI EN 301 489-1 Conducted Emission (DC power input/output port)	N/A*
§7.1	Reference to clause 8.7 of ETSI EN 301 489-1 Conducted Emission (Wired network port)	N/A*
§7.1	Reference to clause 8.2 of ETSI EN 301 489-1 Radiated Emission (Enclosure of ancillary equipment)	Compliant
§7.1	Reference to clause 8.5 of ETSI EN 301 489-1 Harmonic current emissions (AC mains input port)	Compliant
§7.1	Reference to clause 8.6 of ETSI EN 301 489-1 Voltage fluctuations and flicker (AC mains input port)	Compliant
§7.2	Reference to clause 9.3 of ETSI EN 301 489-1 Electrostatic discharge (Enclosure port) (EN 61000-4-2)	Compliant
§7.2	Reference to clause 9.2 of ETSI EN 301 489-1 RF electromagnetic field (80MHz to 6000MHz) (Enclosure port) (EN 61000-4-3)	Compliant
§7.2	Reference to clause 9.4 of ETSI EN 301 489-1 Fast transients common mode (signal, wired network and control ports, DC and AC power ports) (EN 61000-4-4)	Compliant
§7.2	Reference to clause 9.8 of ETSI EN 301 489-1 Surges, line to line and line to ground (AC mains power input ports, wired network ports) (EN 61000-4-5)	Compliant
§7.2	Reference to clause 9.5 of ETSI EN 301 489-1 RF common mode 0.15MHz to 80MHz (signal, wired network and control ports, DC and AC power ports) (EN 61000-4-6)	Compliant
§7.2	Reference to clause 9.6 of ETSI EN 301 489-1 Transients and surges in the vehicular environment (ISO 7637-2)	N/A*
§7.2	Reference to clause 9.7 of ETSI EN 301 489-1 Voltage dips and interruptions (AC mains power input ports) (EN 61000-4-11)	Compliant

### 3. LINE CONDUCTED EMISSION


#### 3.1. Conducted Emission Limit

**Relevant Standard(s):** ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 55032: 2015 Class B

Limits for Line Conducted Emission		
Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.  
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

#### 3.2. Test Configuration

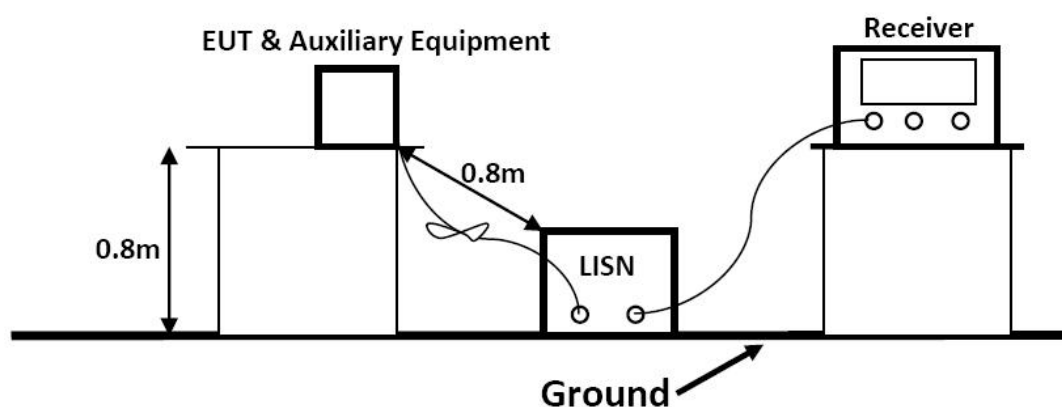

The setup of EUT is according with per ETSI EN 301 489-1 measurement procedure. The specification used was with the ETSI EN 301 489-1 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The EUT received charging power from the Adapter which received power through a LISN supplying power of AC 230V/50Hz.

### 3.3. EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	150KHz ~ 30MHz
(IF)RBW	9kHz

All data was recorded in the Quasi-peak and average detection mode.

### 3.4. Test Procedure


Power on the EUT, the EUT begins to work. Make sure the EUT operates normally during the test.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.


All data was recorded in the Quasi-peak and average detection mode.

3.5. Test Data

\*\*\*Note: For pre-scan, the worst case is TM1, and the test data was shown as follow:

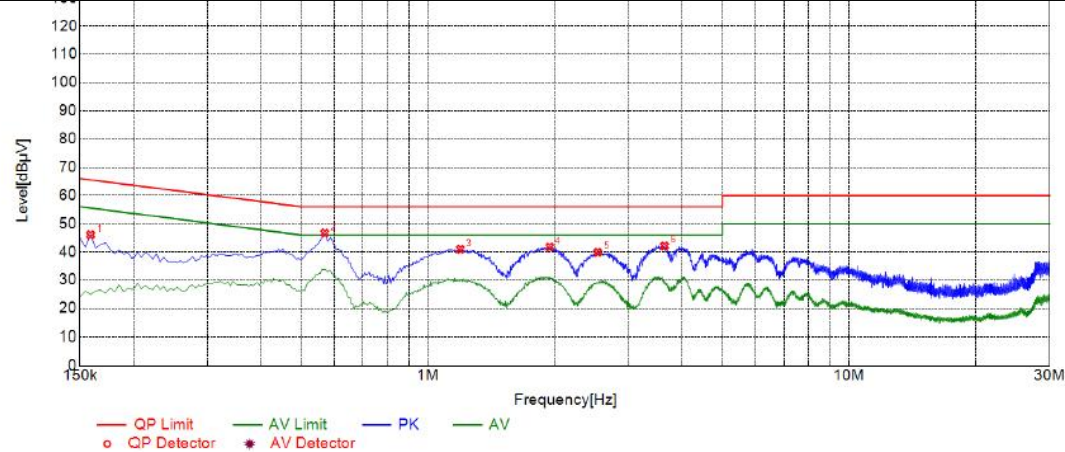

Suspected List								
NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1590	46.08	20.01	65.52	19.44	26.07	PK	L
2	0.5685	46.69	20.05	56.00	9.31	26.64	PK	L
3	1.1940	40.93	20.09	56.00	15.07	20.84	PK	L
4	1.9455	41.77	20.14	56.00	14.23	21.63	PK	L
5	2.5305	39.85	20.19	56.00	16.15	19.66	PK	L
6	3.6465	42.16	20.25	56.00	13.84	21.91	PK	L

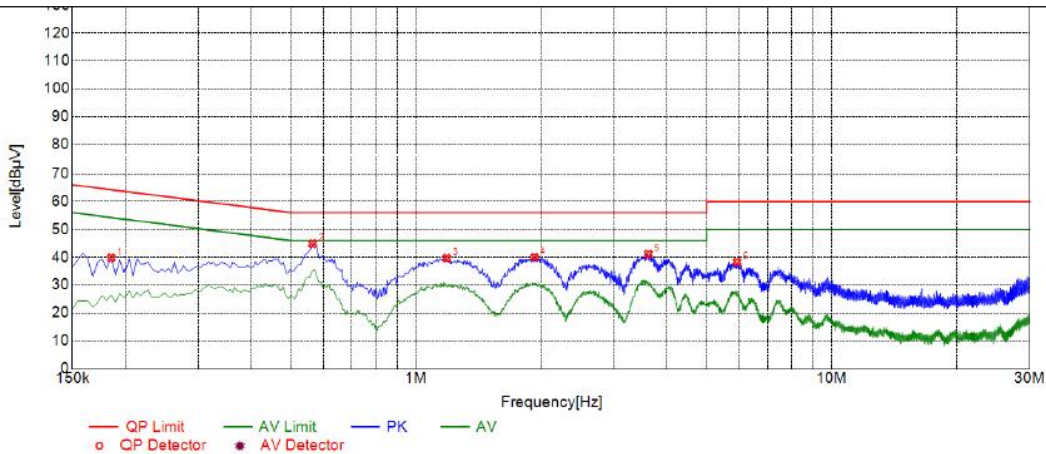

Suspected List								
NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1860	39.80	20.05	64.21	24.41	19.75	PK	N
2	0.5640	44.86	20.06	56.00	11.14	24.80	PK	N
3	1.1850	39.67	20.09	56.00	16.33	19.58	PK	N
4	1.9275	39.97	20.14	56.00	16.03	19.83	PK	N
5	3.6240	41.16	20.25	56.00	14.84	20.91	PK	N
6	5.9235	38.31	20.23	60.00	21.69	18.08	PK	N

## 4. RADIATED DISTURBANCE

### 4.1. Radiated Emission Limit

**Relevant Standard(s):** ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 55032: 2015 Class B

Limits for Radiated Disturbance Below 1GHz			
Frequency (MHz)	Distance (Meters)	Field Strengths Limit (dBμV/m)	
30 ~ 230	3	40	
230 ~ 1000	3	47	
***Note:			
(1) The smaller limit shall apply at the combination point between two frequency bands.			
(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.			
Limits for Radiated Disturbance Above 1GHz			
Frequency (MHz)	Distance (Meters)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)
1000 ~ 3000	3	70	50
3000 ~ 6000	3	74	54
***Note: The lower limit applies at the transition frequency.			

Limits for Radiated Disturbance Below 1GHz (For FM Receivers)			
Frequency (MHz)	Distance (Meters)	Class B Limit (dBμV/m)	
		Fundamental	Harmonics
30 ~ 230	3	60	52
230 ~ 300	3		52
300 ~ 1000	3		56
***Note: These relaxed limits apply only to emissions at the fundamental and harmonic frequencies of the LO.			
Signals at all other frequencies shall be compliant with the limits given in above Table.			
Limits for Radiated Disturbance Above 1GHz (For FM Receivers)			
1000 ~ 3000	3	70	50
3000 ~ 6000	3	74	54
***Note: The lower limit applies at the transition frequency.			

## 4.2. Test Configuration

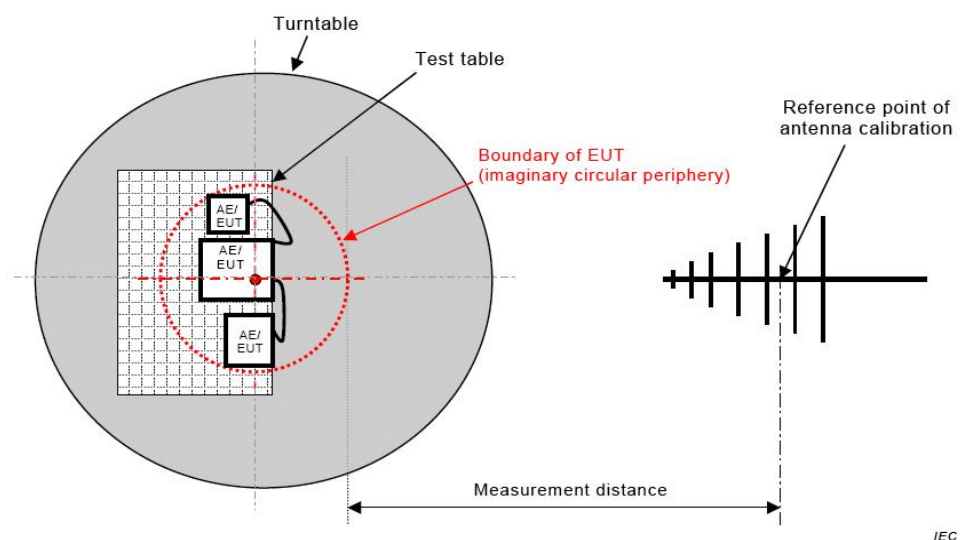
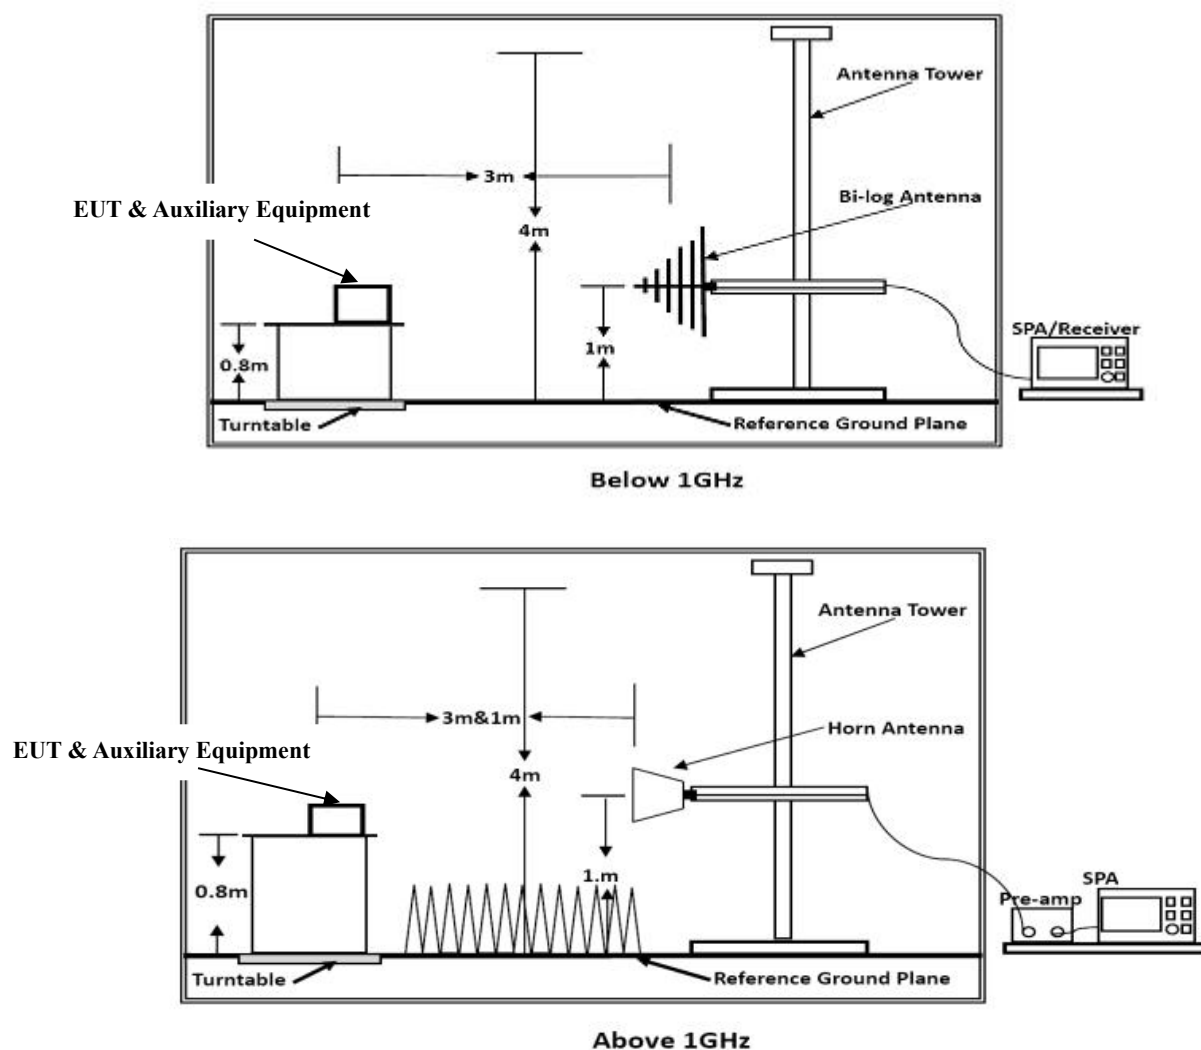


Figure C.1 – Measurement distance

### Test Setup for FM Receiver

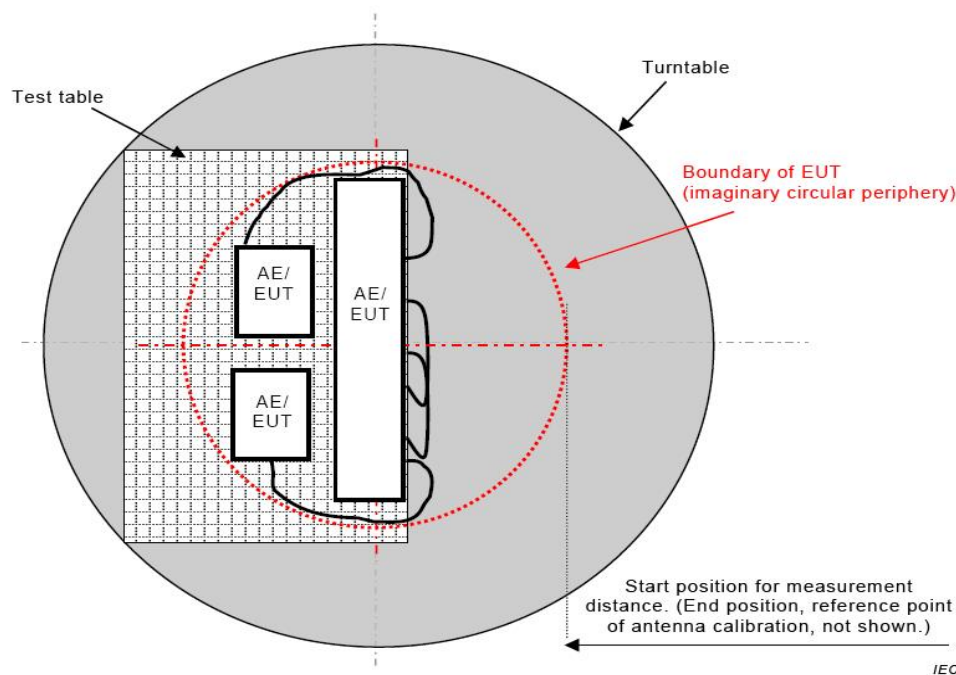


Figure C.2 – Boundary of EUT, Local AE and associated cabling

### Test Setup for FM Receiver

#### 4.3. Test Procedure

##### 1) Sequence of testing 30 MHz to 1 GHz

###### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

###### Pre-measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 4 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

###### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre-measurement with marked maximum final measurements and the limit will be stored.

##### 2) Sequence of testing 1 GHz to 6 GHz



**Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

**Pre-measurement:**

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 4 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

**Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of pre-measurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre-measurement with marked maximum final measurements and the limit will be stored.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	30MHz~1000MHz / RBW 100kHz for QP

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	6000 MHz
RBW / VBW	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average


**4.4. Test Data**

The worst test mode of the EUT was TM1, and its test data was showed as the follow:



Suspected List

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	48.1127	-13.65	23.89	10.24	40.00	29.76	100	191	Horizontal
2	102.1274	-15.41	24.93	9.52	40.00	30.48	100	240	Horizontal
3	137.7059	-19.04	27.11	8.07	40.00	31.93	100	30	Horizontal
4	193.3378	-15.69	27.63	11.94	40.00	28.06	100	117	Horizontal
5	342.7676	-11.65	32.64	20.99	47.00	26.01	100	269	Horizontal
6	725.7219	-4.61	27.09	22.48	47.00	24.52	100	274	Horizontal

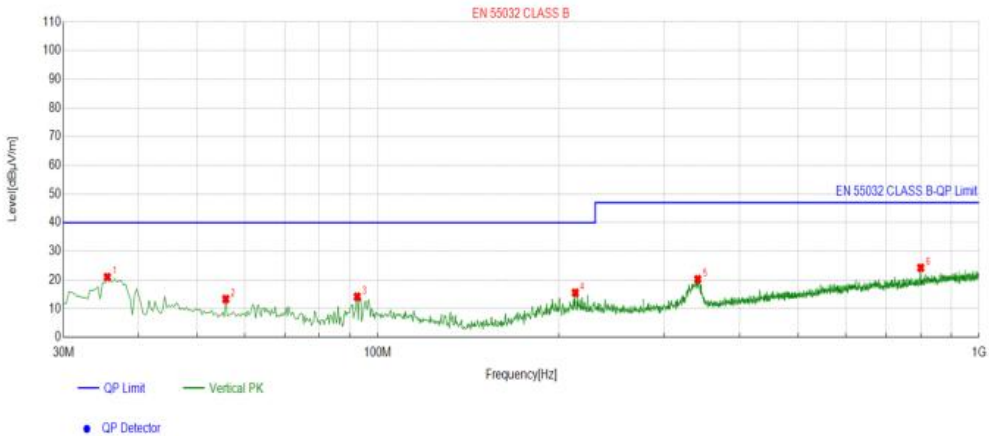

Suspected List


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	35.4985	-15.98	36.97	20.99	40.00	19.01	100	276	Vertical
2	55.8753	-14.54	27.89	13.35	40.00	26.65	100	86	Vertical
3	92.4241	-16.67	30.84	14.17	40.00	25.83	100	177	Vertical
4	213.0677	-14.73	30.28	15.55	40.00	24.45	100	160	Vertical
5	340.5035	-11.64	31.91	20.27	47.00	26.73	100	338	Vertical
6	800.1134	-3.12	27.38	24.26	47.00	22.74	100	359	Vertical

<b>Test Mode:</b> TM1 (Above 1GHz)				<b>Test Distance:</b> 3m			
<b>Test Voltage:</b> AC 230V/50Hz				<b>Test Results:</b> Passed			
<b>Detector Function:</b> Peak + AV							
Polarization	Frequency (MHz)	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Margin (dB)	
Horizontal	1353.79	50.24	37.87	70	50	-19.76	-12.13
	1882.93	48.32	36.25	70	50	-21.68	-13.75
	2189.48	49.07	31.66	74	54	-24.93	-22.34
	3291.10	56.43	31.38	74	54	-17.57	-22.62
	4331.97	51.41	34.36	74	54	-22.59	-19.64
	5887.02	53.64	36.32	74	54	-20.36	-17.68
Vertical	1349.01	49.79	36.70	70	50	-20.21	-13.30
	1884.96	47.74	35.62	70	50	-22.26	-14.38
	2190.15	48.43	30.46	74	54	-25.57	-23.54
	3293.12	57.49	33.04	74	54	-16.51	-20.96
	4331.89	51.36	34.58	74	54	-22.64	-19.42
	5880.63	54.83	36.81	74	54	-19.17	-17.19

1. Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
2. Measurements above show only up to 6 maximum emissions noted.
3. Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 5. HARMONIC CURRENT EMISSIONS

### 5.1. Test Configuration

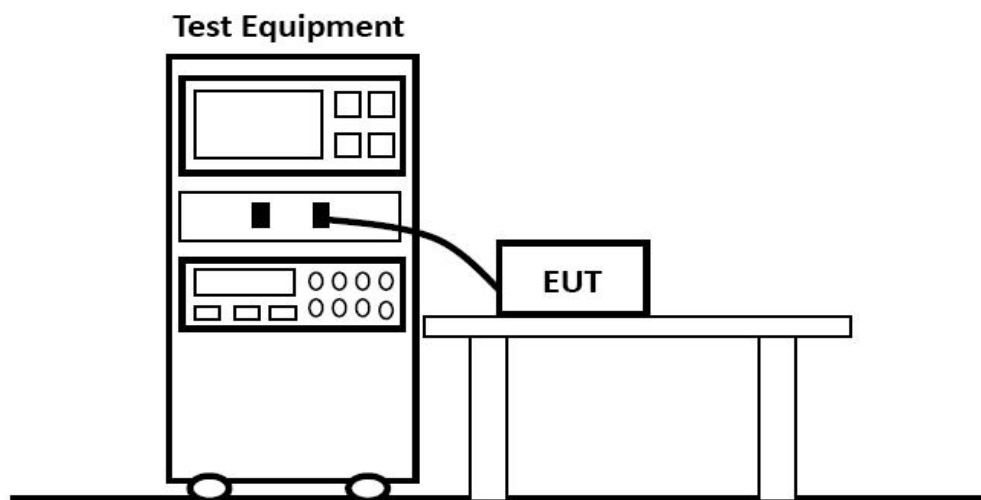

### 5.2. Test Standard

According to ETSI EN 301 489-1 V2.2.3 (2019-11) & EN 61000-3-2: 2014


### 5.3. Test Data

<b>Test Model</b>	Electric water heater	<b>Test Engineer</b>	Jason Li
<b>Environmental Conditions</b>	24.6°C, 52.6% RH	<b>Test Voltage</b>	AC 230V/50Hz

Pass.

## 6. VOLTAGE FLUCTUATION AND FLICKER

### 6.1. Test Configuration

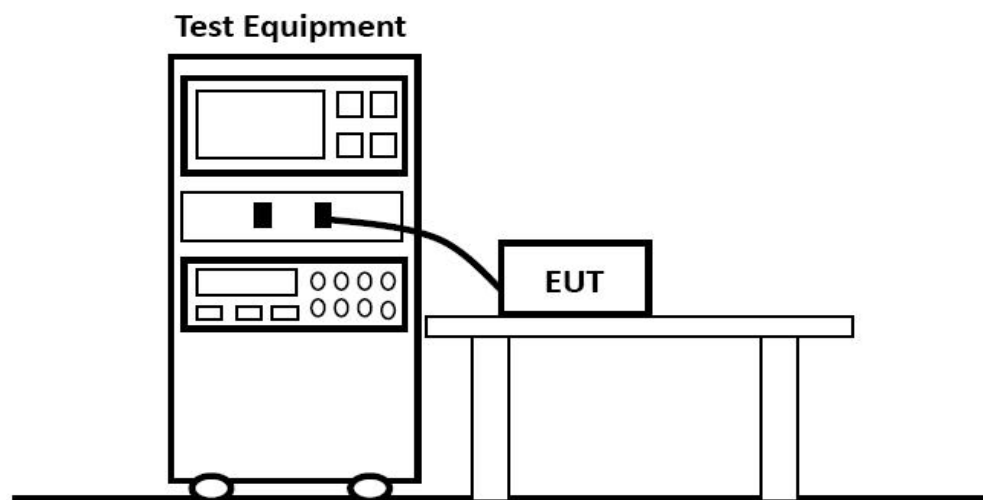

### 6.2. Test Standard

According to ETSI EN 301 489-1 V2.2.3 (2019-11) & EN 61000-3-3: 2013

### 6.3. Test Data

PASS.

## **7. GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST**

### **7.1. Performance criteria for Continuous phenomena applied to Transmitter (CT)**

For equipment of type II or type III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence.

Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

### **7.2. Performance criteria for Transient phenomena applied to Transmitter (TT)**

For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

### **7.3. Performance criteria for Continuous phenomena applied to Receiver (CR)**

For equipment of type II or III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

### **7.4. Performance criteria for Transient phenomena applied to Receiver (TR)**


For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

**Performance criteria for ETSI EN 301 489-17 V3.2.4 (2020-09)**

Criteria	During test	After test
A	Shall operate as intended. (see note 1). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance (see note 3). Shall be no loss of function. Shall be no loss of stored data or user programmable functions.
B	May show loss of function (one or more). May show degradation of performance (see note 2). Shall be no unintentional transmissions.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no degradation of performance (see note 3). Shall be no loss of stored data or user programmable functions.
C	May be loss of function (one or more).	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no degradation of performance (see note 3).
<p>NOTE 1: Operate as intended during the test allows a level of degradation not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.</p> <p>NOTE 2: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.</p> <p>NOTE 3: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.</p>		

## 8. RF ELECTROMAGNETIC FIELD (80 MHz - 6000 MHz)

### 8.1. Test Configuration

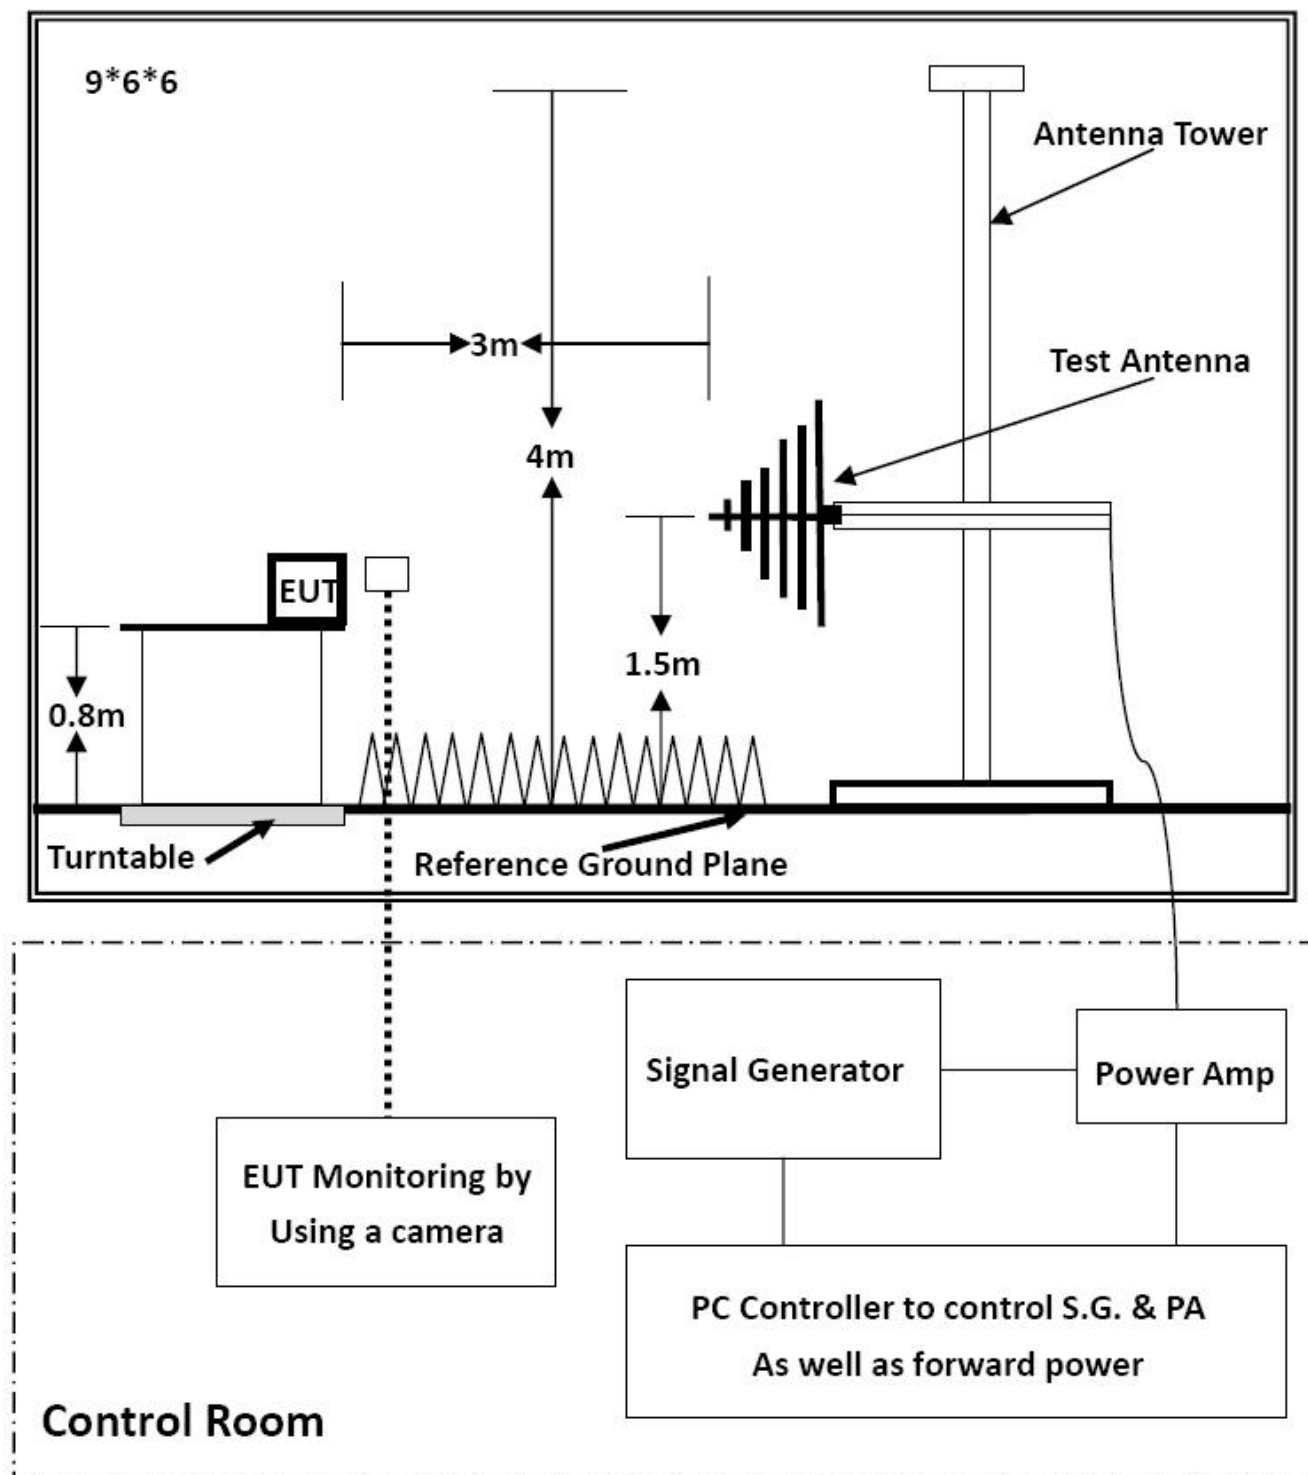



## 8.2. Test Standard

ETSI EN 301 489-1, ETSI EN 301 489-3, ETSI EN 301 489-17, ETSI EN 301489-19 & ETSI EN 301 489-52 / (EN 61000-4-3: 2006+A2: 2010)

Test level 2 at 3V/m.

## 8.3. Severity Level

Level	Field Strength (V/m)
1	1
2	3
3	10
X	Special
Performance Criterion: A	

## 8.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen. All the scanning conditions are as follows:

Condition of Test	Remark
Fielded Strength	3 V/m (Severity Level 2)
Radiated Signal	Unmodulated
Scanning Frequency	80-6000MHz
Dwell time of radiated	0.0015 decade/s
Waiting Time	3 Sec.

## 8.5. Test Result

<b>Test Model</b>	Electric water heater	<b>Test Engineer</b>	Jason Li
<b>Environmental Conditions</b>	23.5°C, 53.2% RH	<b>Test Voltage</b>	AC 230V/50Hz

### WIFI Test Result:

EUT Working Mode	Antenna Polarity	Frequency (MHz)	Fielded Strength (V/m)	Observation	Position	Conclusion
Operating Mode	Vertical	80-6000	3	CT, CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CT, CR	Front, Right, Left, Back	Pass
Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass


### TM2-TM3 Test Result:

EUT Working Mode	Antenna Polarity	Frequency (MHz)	Fielded Strength (V/m)	Observation	Position	Conclusion
Operating Mode	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass
Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass

## 9. ELECTROSTATIC DISCHARGE

Please refer to ETSI EN 301 489-1 and EN 61000-4-2.

### 9.1. Test Configuration

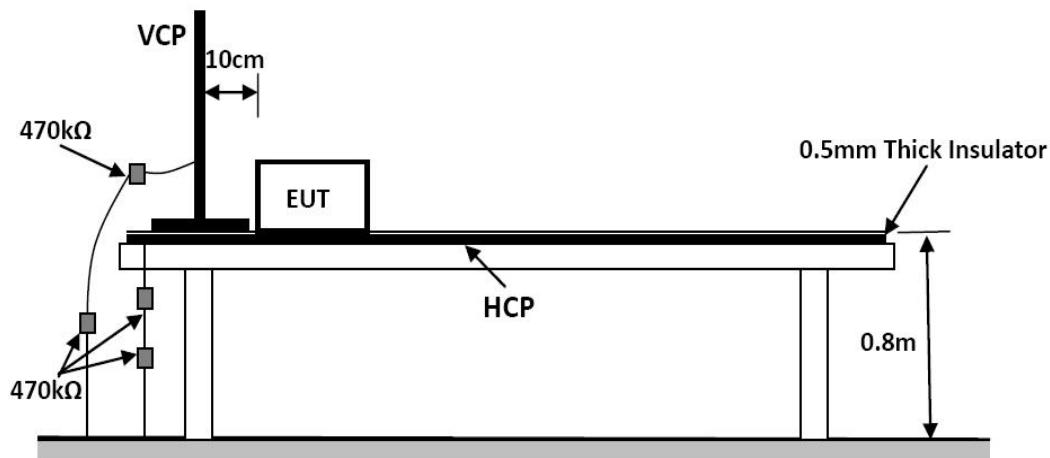

EN 61000-4-2 specifies that a tabletop EUT shall be placed on a non-conducting table which is 80 centimeters above a ground reference plane and that floor mounted equipment shall be placed on a insulating support approximately 10 centimeters above a ground plane. During the tests, the EUT is positioned over a ground reference plane in conformance with this requirement.

For tabletop equipment, a 1.5 by 1.0-meter metal sheet (HCP) is placed on the table and connected to the ground plane via a metal strap with two 470 k Ohms resistors in series. The EUT and attached cables are isolated from this metal sheet by 0.5-millimeter thick insulating material. A Vertical Coupling Plane (VCP) grounded on the ground plane through the same configuration as in the HCP is used.

### 9.2. Test Procedure

ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 61000-4-2: 2009

Test level 3 for Air Discharge at  $\pm 8$  kV

Test level 2 for Contact Discharge at  $\pm 4$  kV

#### 9.2.1. Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

#### 9.2.2. Contact Discharge

All the procedure shall be same as Section 9.2.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

#### 9.2.3. Indirect Discharge For Horizontal Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

#### 9.2.4. Indirect Discharge For Vertical Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

### 9.3. Test Data

**PASS.**

# Electrostatic Discharge Test Results

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-2 <input checked="" type="checkbox"/> EN 61000-4-2		
<b>Applicant</b>	Guangdong Well-born Electric Appliance Co., Ltd.		
<b>EUT</b>	Electric water heater	<b>Temperature</b>	23.5℃
<b>M/N</b>	NDT20E30-4	<b>Humidity</b>	53.1%
<b>Criterion</b>	B	<b>Pressure</b>	1021mbar
<b>Test Mode</b>	TM1-TM3	<b>Test Date</b>	
<b>Test Engineer</b>	Jason Li		

## TEST RESULT OF WIFI

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	CT, CR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	CT, CR	Pass
±2KV, ±4kV	Indirect Discharge HCP	CT, CR	Pass
±2KV, ±4kV	Indirect Discharge VCP	CT, CR	Pass


## TEST RESULT OF TM2-TM3

Test Voltage	Coupling	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	Pass
±2KV, ±4kV, ±8kV	Air Discharge	Pass
±2KV, ±4kV	Indirect Discharge HCP	Pass
±2KV, ±4kV	Indirect Discharge VCP	Pass

Note: The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

## 10. ELECTRICAL FAST TRANSIENT IMMUNITY

### 10.1. Test Configuration

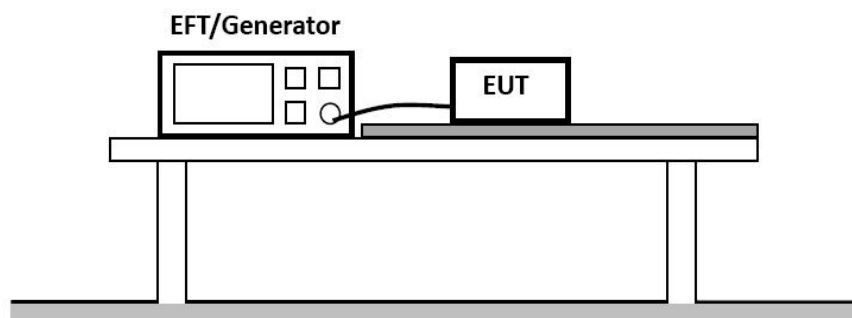

### 10.2. Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11)/ EN61000-4-4: 2012  
Test level 2 at 1 kV

Test Level		
Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special
Performance Criterion: B		

### 10.3. Test Procedure

The EUT is put on the table, which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

10.3.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device, which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 minutes.

10.3.2. For signal lines and control lines ports: No I/O ports. It's unnecessary to test.

10.3.3. For DC output line ports: It's unnecessary to test.

### 10.4. Test Data

**PASS.**

Please refer to the following page.

## Electrical Fast Transient/Burst Test Results

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-4 <input checked="" type="checkbox"/> EN 61000-4-4		
<b>Applicant</b>	Guangdong Well-born Electric Appliance Co., Ltd.		
<b>EUT</b>	Electric water heater	<b>Temperature</b>	24.6℃
<b>M/N</b>	NDT20E30-4	<b>Humidity</b>	52.6%
<b>Test Mode</b>	TM1-TM3	<b>Criterion</b>	B
<b>Test Engineer</b>	Jason Li		

### TEST RESULT OF WIFI


Line	Test Voltage	Polarity	Observation	Result (Pass/Fail)
L	1KV	+/-	CT, CR	Pass
N	1KV	+/-	CT, CR	Pass
L-N	1KV	+/-	CT, CR	Pass

### TEST RESULT OF TM2-TM3

Line	Test Voltage	Polarity	Result (Pass/Fail)
L	1KV	+/-	Pass
N	1KV	+/-	Pass
L-N	1KV	+/-	Pass

## 11. RF COMMON MODE

### 11.1. Test Configuration

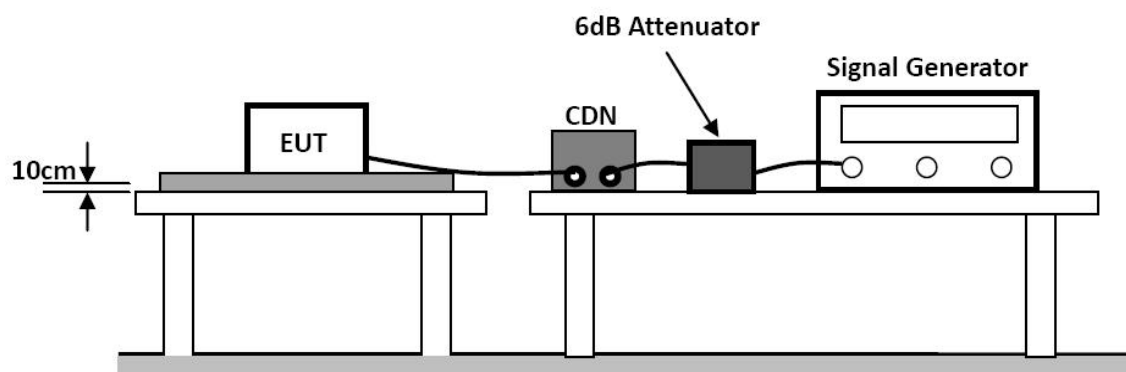

### 11.2. Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11)/ EN 61000-4-6: 2014

Test level 2 at 3 V (r.m.s.), 0.15 MHz ~ 80 MHz,

Modulation type: AM

Modulation depth: 80%

Modulation signal: 1 kHz

Test Level	
Level	Voltage Level (r.m.s.) (V)
1	1
2	3
3	10
X	Special
Performance Criterion: A	



### 11.3. Test Procedure

11.3.1. Let the EUT work in test mode and test it.

11.3.2. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50mm (where possible).

11.3.3. The disturbance signal described below is injected to EUT through CDN.

11.3.4. The EUT operates within its operational mode(s) under intended climatic conditions after power on.

11.3.5. The frequency range is swept from 150kHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.

11.3.6. The rate of sweep shall not exceed  $1.5 \times 10^{-3}$  decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

11.3.7. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

### 11.4. Test Data

**PASS.**


Please refer to the following page.

Injected Currents Susceptibility Test Results			
Standard	<input type="checkbox"/> IEC 61000-4-6 <input checked="" type="checkbox"/> EN 61000-4-6		
Applicant	Guangdong Well-born Electric Appliance Co., Ltd.		
EUT	Electric water heater	Temperature	22.6℃
M/N	NDT20E30-4	Humidity	52.3%
Test Mode	TM1-TM3	Criterion	A
Test Engineer	Jason Li		

TEST RESULT OF WIFI				
Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Observation	Result (Pass/Fail)
0.15 ~ 80	AC Mains	3V	CT, CR	Pass
TEST RESULT OF TM2-TM3				
Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Result (Pass/Fail)	
0.15 ~ 80	AC Mains	3V	Pass	
Remark: 1. Modulation Signal:1kHz 80% AM 2. Measurement Equipment : Simulator: CIT-10 (FRANKONIA) CDN : <input checked="" type="checkbox"/> CDN-M2 (FRANKONIA) <input type="checkbox"/> CDN-M3 (FRANKONIA)				

## 12. SURGES, LINE TO LINE AND LINE TO GROUND

### 12.1. Test Configuration

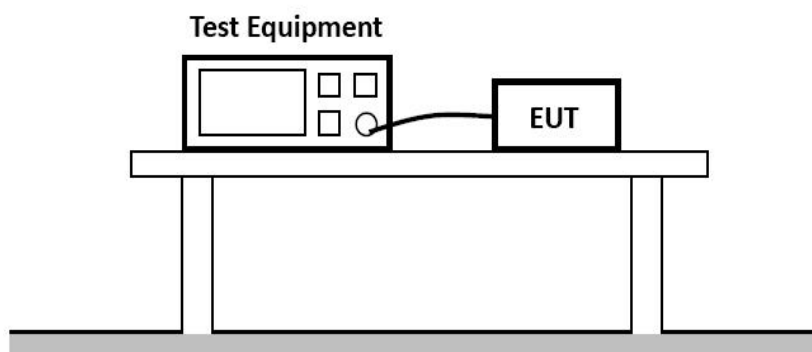

### 12.2. Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 61000-4-5: 2014

L-N: Test level 2 at 1 kV

L-PE, N-PE Test Level 3 at 2kV

Test Level		
Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special
Performance Criterion: B		

### 12.3. Test Procedure

- 12.3.1. For line to line coupling mode, provide a 0.5 kV 1.2/50us voltage surge (at open-circuit condition).
- 12.3.2. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 12.3.3. Different phase angles are done individually.
- 12.3.4. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.


## 12.4. Test Data

Surge Immunity Test Result			
Standard	<input type="checkbox"/> IEC 61000-4-5 <input checked="" type="checkbox"/> EN 61000-4-5		
Applicant	Guangdong Well-born Electric Appliance Co., Ltd.		
EUT	Electric water heater	Temperature	24.6℃
M/N	NDT20E30-4	Humidity	52.6%
Test Mode	TM1-TM3	Criterion	A
Test Engineer	Jason Li		

TEST RESULT OF WIFI						
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Observation	Result (Pass/Fail)
L-N	+	0°, 90°, 180°, 270°	5	1.0	CT, CR	Pass
	-	0°, 90°, 180°, 270°	5	1.0	CT, CR	Pass
TEST RESULT OF TM2-TM3						
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)		Result (Pass/Fail)
L-N	+	0°, 90°, 180°, 270°	5	1.0		Pass
	-	0°, 90°, 180°, 270°	5	1.0		Pass

## 13. VOLTAGE DIPS/INTERRUPTIONS IMMUNITY TEST

### 13.1. Test Configuration

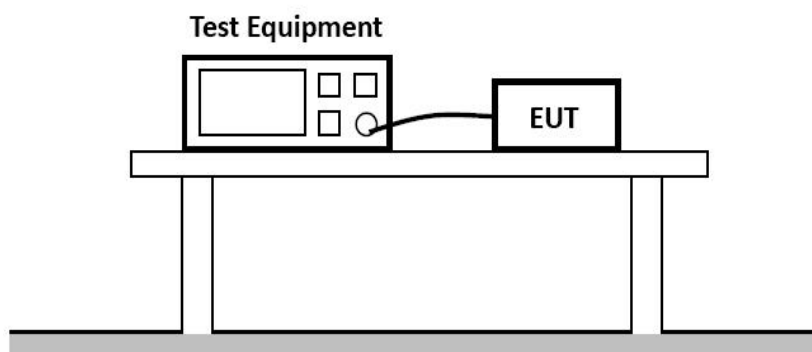

### 13.2. Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11)/ EN 61000-4-11: 2004

Test levels and Performance Criterion

Test Level		
Voltage Reduction $\%U_T$	Voltage Dips $\%U_T$	Duration (in Period)
100	0	0.5
100	0	1
30	70	5
Voltage Reduction $\%U_T$	Voltage Dips $\%U_T$	Duration (in Period)
100	0	250
Performance Criterion: B&C		

### 13.3. Test Procedure

13.3.1. The interruption is introduced at selected phase angles with specified duration.


13.3.2. Record any degradation of performance.

## 13.4. Test Data

Voltage Dips And Interruptions Test Results			
Standard	<input type="checkbox"/> IEC 61000-4-11 <input checked="" type="checkbox"/> EN 61000-4-11		
Applicant	Guangdong Well-born Electric Appliance Co., Ltd.		
EUT	Electric water heater	Temperature	24.6℃
M/N	NDT20E30-4	Humidity	52.6%
Test Mode	TM1-TM3	Criterion	A
Test Engineer	Jason Li		

TEST RESULT OF WIFI				
Test Level % U <sub>T</sub>	Voltage Dips & Short Interruptions % U <sub>T</sub>	Duration (in periods)	Observation	Result (Pass/Fail)
0	100	0.5P	CT, CR	Pass
0	100	1P	CT, CR	Pass
70	30	25P	CT, CR	Pass
0	100	250P	CT, CR	Pass
TEST RESULT OF TM2-TM3				
Test Level % U <sub>T</sub>	Voltage Dips & Short Interruptions % U <sub>T</sub>	Duration (in periods)	Result (Pass/Fail)	
0	100	0.5P	Pass	
0	100	1P	Pass	
70	30	25P	Pass	
0	100	250P	Pass	

## 14. Setup Photographs

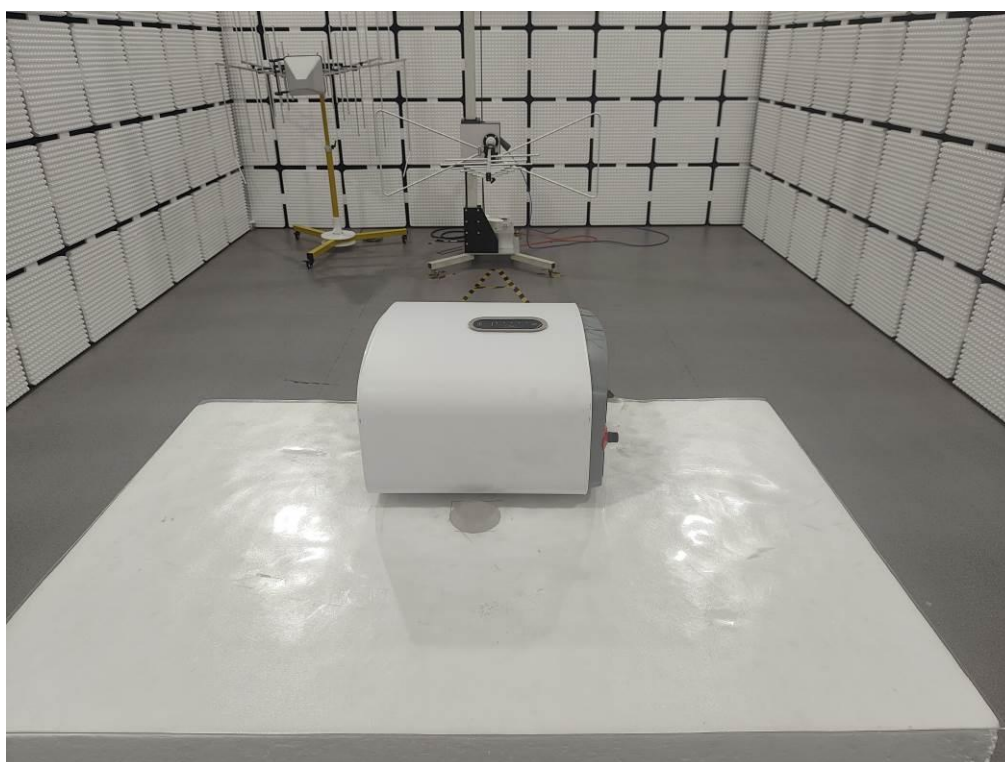

## 15. EUT Photographs



Fig.1

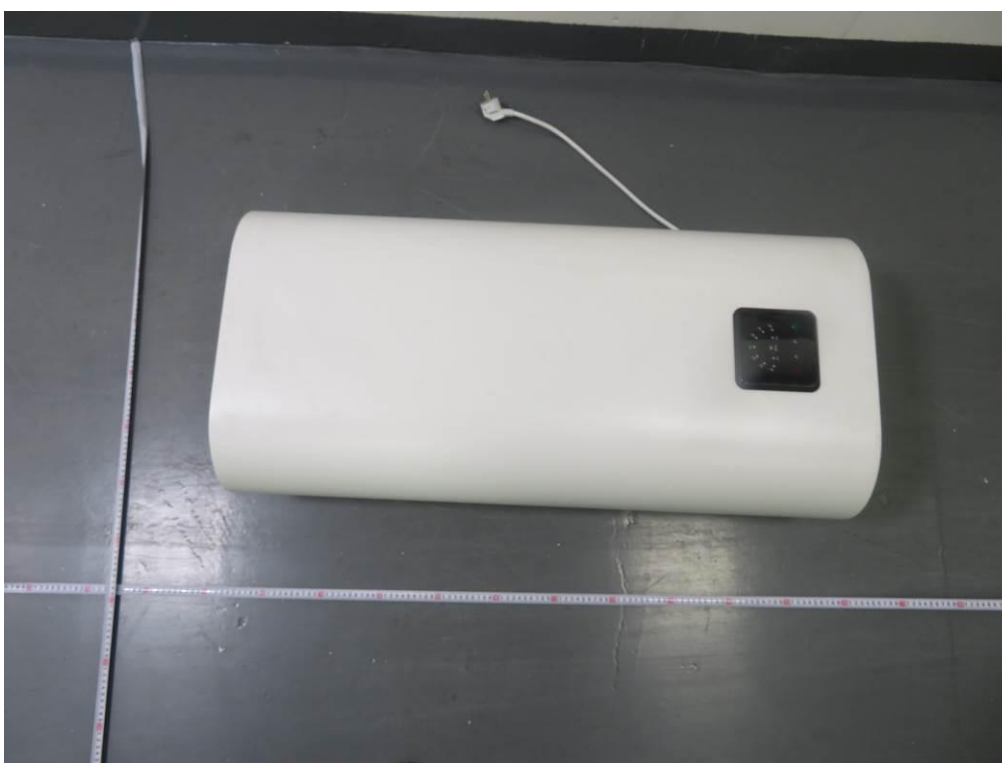


Fig.2





Fig.3



Fig.4

-----THE END OF REPORT-----