



TEST REPORT

COMMISSION REGULATION (EU) 2019/2020
COMMISSION DELEGATED REGULATION (EU) 2019/2015

Report Reference No.: AOC250625007ER

Compiled by (print+ signature).....: Bill Hu

Bill Hu

Approved by (print+ signature).....: Robin Liu

Robin Liu

Lab Supervisor

Date of issue.....: 2025-06-26

Testing Laboratory.....: Shenzhen AOCE Electronic Technology Service Co., Ltd

Address.....: Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China

Testing location/address.....: Same as above

Applicant's name.....: General Luminaire (Shanghai) Co., Ltd.

Address.....: 7F, Gate 1, No.1128 Jindu Road, Minhang District, Shanghai, China

Manufacturer name.....: General Luminaire (Kun Shan) Co., Limited

Address.....: No.1068, Fuchunjiang Road, Kunshan development zone, Jiangsu Province China

Test Object.....: Led Modules

Trade Mark.....: InstaLighting

Model / Type reference.....: See the model list on page 5 of the report

Rated voltage (V).....: See the model list on page 5 of the report

Rated frequency (Hz).....: See the model list on page 5 of the report

Rated Power (W).....: See the model list on page 5 of the report

Rated luminous (lm).....: See the model list on page 5 of the report

Rated color temperature (CCT).....: See the model list on page 5 of the report

Rated color rendering (CRI).....: See the model list on page 5 of the report

Rated life (h).....: See the model list on page 5 of the report

Test specification:

Standard.....: COMMISSION REGULATION (EU) 2019/2020; (EU) 2019/2015;
 COMMISSION DELEGATED REGULATION (EU) 2021/340;
 COMMISSION REGULATION (EU) 2021/341

Test procedure.....: Test report

Non-standard test method.....: N/A

Test Report Form No......: IEC EE TRF No. (EU) 2019/2020

Test Report Form(s) Originator.....: AOCE

Master TRF.....: 2019-11-30

Summary of Testing:	
Tests performed (name of test and test clause):	Testing location:
The sample(s) tested complies with the requirements of COMMISSION REGULATION (EU) 2019/2020 When determining the test conclusion. The Measurement Uncertainty of test has be enconsidered.	Shenzhen AOCE Electronic Technology Service Co., Ltd Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
Summary of Compliance with National Differences:	
N/A	
Copy of Marking Plate:	
N/A	

Type of light source:	
Product type.....	☒ Light source ☐ Separate control gears
Lighting technology used.....	☒ LED ☐ OLED ☐ Other
Non-directional or directional.....	☐ DLS (Directional) ☒ NDLS (Non-directional)
Use of lamp.....	☒ Indoor ☐ Outdoor ☐ Industry
Light source cap-type (or other electric interface).....	Connecting lead
Mains or non-mains.....	☒ MLS (mains light source) ☐ NMLS (non-mains light source)
Connected light source (CLS).....	☐ Yes ☒ No
Colour-tuneable light source.....	☐ Yes ☒ No
Envelope.....	☐ Yes ☒ No
High luminance light source.....	☐ Yes ☒ No
Anti-glare shield.....	☐ Yes ☒ No
Dimmable.....	☐ Yes ☒ No
Product parameters	
Parameter.....	See the model list on page 5 of the report
Energy consumption in on-mode (KWh/1000h).....	11
Energy efficiency class.....	See table 8
Beam angle correspondence.....	See table 4
Correlated colour temperature (K).....	See table 3
On-mode power (W).....	See table 1
Standby power (W).....	See table 1
Networked standby power for CLS (W).....	See table 1
Colour rendering index.....	See table 3
Colour rendering index range (Minimum).....	See table 3
Colour rendering index range (Maximum).....	See table 3
Claim of equivalent power.....	☐ Yes ☒ No
Equivalent power (W).....	/
Chromaticity coordinate (x).....	See table 3
Chromaticity coordinate (y).....	See table 3
PARAMETERS FOR DIRECTIONAL LIGHT SOURCES	
Peak luminous intensity (cd).....	See table 4
Beam angle (degrees).....	See table 4
Beam angle range (Minimum) (degrees).....	See table 4
Beam angle range (Maximum) (degrees).....	See table 4
PARAMETERS FOR LED AND OLED LIGHT SOURCES	
R9 Colour rendering index.....	See table 3
Survival factor.....	See table 4
Lumen maintenance factor.....	See table 4
PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES	

Displacement factor.....	See table 1
Colour consistency in McAdam ellipses.....	See table 3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.....	☐ Yes ☒ N.A
Replacement claim (W).....	/
Flicker metric (W).....	See table 5
Stroboscopic effect metric (W).....	See table 5
Outer dimensions without (Millimetre).....	See the model list on page 5 of the report
Spectral power distribution in the range 250 nm to 800 nm, at full-load.....	See table 7
Possible Test Case Verdicts:	
Test case does not apply to the test object.....	N/A (Not Applicable)
Test object does meet the requirement.....	P (Pass)
Test object does not meet the requirement.....	F (Fail)
Testing:	
Ambient temperature of tested	25.0 °C
Test inputs.....	230V~
Sample size for tested	10 pcs
Date of receipt of test item.....	2024-11-28
Date (s) of performance of tests.....	2024-11-28 to 2025-06-25
General Remarks:	
Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or use in part without prior written consent from Shenzhen AOCE Electronic Technology Service Co., Ltd	

Note:

Model list						
Model	Rating	Rated luminous	Rated color temperature	Rated Colour rendering	Rated life	Size
GLV719721 51/I0- NB10TLT18 4922	230V~, 50Hz, 10.5W	945 lm	2200K	90	50000 h	972*15*20mm
GLV719721 51/I0- NB10TLT18 4927	230V~, 50Hz, 10.5W	1020 lm	2700K	90	50000 h	972*15*20mm
GLV719721 51/I0- NB10TLT18 4930	230V~, 50Hz, 10.5W	1060 lm	3000K	90	50000 h	972*15*20mm
GLV719721 51/I0- NB10TLT18 4940	230V~, 50Hz, 10.5W	1165 lm	4000K	90	50000 h	972*15*20mm
GLV719721 51/I0- NB10TLT18 4840	230V~, 50Hz, 10.5W	1365 lm	4000K	80	50000 h	972*15*20mm

(EU) 2019/2020																	
Clause	Requirement + Test	Result – Remark	Verdict														
2	Functional requirements		-														
	From 1 September 2021, the functional requirements specified in follow table shall apply for light sources:		P														
	Table 4 Functional requirements for light sources <table><tr><td>Colour rendering</td><td>CRI ≥ 80 (except for HID with Φ_{ext} > 4 klm and for light sources intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a CRI< 80, when a clear indication to this effect is shown on the light source packaging and in all relevant printed and electronic documentation)</td></tr><tr><td>Displacement factor (DF, cos φ₁) at power input P_{on} for LED and OLED MLS</td><td>No limit at P_{on} ≤ 5 W, DF ≥ 0,5 at 5 W < P_{on} ≤ 10 W, DF ≥ 0,7 at 10 W < P_{on} ≤ 25 W DF ≥ 0,9 at 25 W < P_{on}</td></tr><tr><td>Lumen maintenance factor (for LED and OLED)</td><td>The lumen maintenance factor X_{LMF}% after endurance testing according to Annex V shall be at least X_{LMF,MIN} % calculated as follows: $X_{LMF,MIN} \% = 100 \times e^{-\frac{(3000 \times \ln(0,7))}{L_{70}}}$where L₇₀ is the declared L₇₀B₅₀ lifetime (in hours) If the calculated value for X_{LMF,MIN} exceeds 96,0 %, an X_{LMF,MIN} value of 96,0 % shall be used</td></tr><tr><td>Survival factor (for LED and OLED)</td><td>Light sources should be operational as specified in row 'Survival factor (for LED and OLED)' of Annex IV, Table 6, following the endurance testing given in Annex V.</td></tr><tr><td>Colour consistency for LED and OLED light sources</td><td>Variation of chromaticity coordinates within a six-step MacAdam ellipse or less.</td></tr><tr><td>Flicker for LED and OLED MLS</td><td>P_{st} LM ≤ 1,0 at full-load</td></tr><tr><td>Stroboscopic effect for LED and OLED MLS</td><td>SVM ≤ 0,4 at full-load (except for HID with Φ_{ext} > 4 klm and for light sources intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a CRI< 80)</td></tr></table>	Colour rendering	CRI ≥ 80 (except for HID with Φ _{ext} > 4 klm and for light sources intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a CRI< 80, when a clear indication to this effect is shown on the light source packaging and in all relevant printed and electronic documentation)	Displacement factor (DF, cos φ ₁) at power input P _{on} for LED and OLED MLS	No limit at P _{on} ≤ 5 W, DF ≥ 0,5 at 5 W < P _{on} ≤ 10 W, DF ≥ 0,7 at 10 W < P _{on} ≤ 25 W DF ≥ 0,9 at 25 W < P _{on}	Lumen maintenance factor (for LED and OLED)	The lumen maintenance factor X _{LMF} % after endurance testing according to Annex V shall be at least X _{LMF,MIN} % calculated as follows: $X_{LMF,MIN} \% = 100 \times e^{-\frac{(3000 \times \ln(0,7))}{L_{70}}}$ where L ₇₀ is the declared L ₇₀ B ₅₀ lifetime (in hours) If the calculated value for X _{LMF,MIN} exceeds 96,0 %, an X _{LMF,MIN} value of 96,0 % shall be used	Survival factor (for LED and OLED)	Light sources should be operational as specified in row 'Survival factor (for LED and OLED)' of Annex IV, Table 6, following the endurance testing given in Annex V.	Colour consistency for LED and OLED light sources	Variation of chromaticity coordinates within a six-step MacAdam ellipse or less.	Flicker for LED and OLED MLS	P _{st} LM ≤ 1,0 at full-load	Stroboscopic effect for LED and OLED MLS	SVM ≤ 0,4 at full-load (except for HID with Φ _{ext} > 4 klm and for light sources intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a CRI< 80)		-
Colour rendering	CRI ≥ 80 (except for HID with Φ _{ext} > 4 klm and for light sources intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a CRI< 80, when a clear indication to this effect is shown on the light source packaging and in all relevant printed and electronic documentation)																
Displacement factor (DF, cos φ ₁) at power input P _{on} for LED and OLED MLS	No limit at P _{on} ≤ 5 W, DF ≥ 0,5 at 5 W < P _{on} ≤ 10 W, DF ≥ 0,7 at 10 W < P _{on} ≤ 25 W DF ≥ 0,9 at 25 W < P _{on}																
Lumen maintenance factor (for LED and OLED)	The lumen maintenance factor X _{LMF} % after endurance testing according to Annex V shall be at least X _{LMF,MIN} % calculated as follows: $X_{LMF,MIN} \% = 100 \times e^{-\frac{(3000 \times \ln(0,7))}{L_{70}}}$ where L ₇₀ is the declared L ₇₀ B ₅₀ lifetime (in hours) If the calculated value for X _{LMF,MIN} exceeds 96,0 %, an X _{LMF,MIN} value of 96,0 % shall be used																
Survival factor (for LED and OLED)	Light sources should be operational as specified in row 'Survival factor (for LED and OLED)' of Annex IV, Table 6, following the endurance testing given in Annex V.																
Colour consistency for LED and OLED light sources	Variation of chromaticity coordinates within a six-step MacAdam ellipse or less.																
Flicker for LED and OLED MLS	P _{st} LM ≤ 1,0 at full-load																
Stroboscopic effect for LED and OLED MLS	SVM ≤ 0,4 at full-load (except for HID with Φ _{ext} > 4 klm and for light sources intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a CRI< 80)																
	Colour rendering	See table 3	P														
	Displacement factor (DF, cos φ ₁) at power input Pon for LED and OLED MLS	See table 1	P														
	Lumen maintenance factor (for LED and OLED)	>96%	P														
	Survival factor (for LED and OLED)	See table 4	P														
	Colour consistency for LED and OLED light sources (SDCM)	See table 3	P														
	Flicker for LED and OLED MLS (P _{St} LM≤ 1.0)	See table 5	P														
	Stroboscopic effect for LED and OLED MLS (SVM ≤ 0.9; From 1 September 2024: SVM ≤ 0.4)	See table 5	P														

(EU) 2019/2020			
Clause	Requirement + Test	Result – Remark	Verdict
3	Information requirements		-
	From 1 September 2021 the following information requirements shall apply:		P
(a)	Information to be displayed on the light source itself		P
	For all light sources, except CTLS, LFL, CFLni, ther FL, and HID, the value and physical unit of the useful luminous flux (lm) and correlated colour temperature (K) shall be displayed in a legible font on the surface if, after the inclusion of safety-related information, there is sufficient space available for it without unduly obstructing the light emission.		P
	For directional light sources, the beam angle (°) shall also be indicated.		N/A
	If there is room for only two values, the useful luminous flux and the correlated colour temperature shall be displayed. If there is room for only one value, the useful luminous flux shall be displayed.		P
(b)	Information to be visibly displayed on the packaging		P
-(1)	Light source placed on the market, not in a containing product		P
--(a)	the useful luminous flux (Φ_{use}) in a font at least twice as large as the display of the on-mode power (P_{on}), clearly indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°);		P
--(b)	the correlated colour temperature, rounded to the nearest 100 K, also expressed graphically or in words, or the range of correlated colour temperatures that can be set;		P
--(c)	the beam angle in degrees (for directional light sources), or the range of beam angles that can be set;		N/A
--(d)	electrical interface details, e.g. cap- or connector-type, type of power supply (e.g. 220-240 V AC 50 Hz, 12 V DC);		P
--(e)	the L70B50 lifetime for LED and OLED light sources, expressed in hours;		P
--(f)	the on-mode power (P_{on}), expressed in W;		P
--(g)	the standby power (P_{sb}), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging;		P
--(h)	the networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging;		N/A
--(i)	the colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set;		P

(EU) 2019/2020			
Clause	Requirement + Test	Result – Remark	Verdict
--(j)	if CRI< 80, and the light source is intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a CRI< 80, a clear indication to this effect. For HID light sources with useful luminous flux > 4 000 lm, this indication is not mandatory;		N/A
--(k)	if the light source is designed for optimum use in non-standard conditions (such as ambient temperature $T_a \neq 25^\circ\text{C}$ or specific thermal management is necessary): information on those conditions;		N/A
--(l)	a warning if the light source cannot be dimmed or can be dimmed only with specific dimmers or with specific wired or wireless dimming methods. In the latter cases a list of compatible dimmers and/or methods shall be provided on the manufacturer's website;		N/A
--(m)	if the light source contains mercury: a warning of this, including the mercury content in mg rounded to the first decimal place;		N/A
--(n)	if the light source is within the scope of Directive 2012/19/EU, without prejudice to marking obligations pursuant to Article 14(4) of Directive 2012/19/EU, or contains mercury: a warning that it shall not be disposed of as unsorted municipal waste.		N/A
	Items (a) to (d) shall be displayed on the packaging in the direction meant to face prospective buyer; for other items this is also recommended, if space permits.		P
	For light sources that can be set to emit light with different characteristics, the information shall be reported for the reference control settings. In addition, a range of obtainable values may be indicated.		N/A
	The information does not need to use the exact wording on the list above. Alternatively, it may be displayed in the form of graphs, drawings or symbols.		P
-(2)	Separate control gears:		N/A
	If a separate control gear is placed on the market as a stand-alone product and not as a part of a containing product, in a packaging containing information to be visibly displayed to potential buyers, prior to their purchase, the following information shall be clearly and prominently displayed on the packaging:		N/A
--(a)	the maximum output power of the control gear (for HL, LED and OLED) or the power of the light source for which the control gear is intended (for FL and HID);		N/A
--(b)	the type of light source(s) for which it is intended;		N/A

(EU) 2019/2020			
Clause	Requirement + Test	Result – Remark	Verdict
--(c)	the efficiency in full-load, expressed in percentage;		N/A
--(d)	the no-load power (P_{no}), expressed in W and rounded to the second decimal, or the indication that the gear is not intended to operate in no-load mode. If the value is zero, it may be omitted from the packaging but shall nonetheless be declared in the technical documentation and on websites;		N/A
--(e)	the standby power (P_{sb}), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging but shall nonetheless be declared in the technical documentation and on websites;		N/A
--(f)	the on-mode power (P_{on}), expressed in W;		N/A
--(g)	the standby power (P_{sb}), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging;		N/A
--(h)	the networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging;		N/A
(c)	Information to be visibly displayed on a free-access website of the manufacturer, importer or authorised representative		N/A
-(1)	Separate control gears:		N/A
	For any separate control gear that is placed on the EU market, the following information shall be displayed on at least one free-access website:		N/A
--(a)	the information specified in point 3(b)(2), except 3(b)(2)(h);		N/A
--(b)	the outer dimensions in mm;		N/A
--(c)	the mass in grams of the control gear, without packaging, and without lighting control parts and non-lighting parts, if any and if they can be physically separated from the control gear;		N/A
--(d)	instructions on how to remove lighting control parts and non-lighting parts, if any, or how to switch them off or minimise their power consumption during control-gear testing for market surveillance purposes;		N/A
--(e)	if the control gear can be used with dimmable light sources, a list of minimum characteristics that the light sources should have to be fully compatible with the control gear during dimming, and possibly a list of compatible dimmable light sources;		N/A
--(f)	recommendations on how to dispose of it at the end of its life in line with Directive 2012/19/EU.		N/A

(EU) 2019/2020			
Clause	Requirement + Test	Result – Remark	Verdict
	The information does not need to use the exact wording in the list above. Alternatively, it may be displayed in the form of graphs, drawings or symbols.		N/A
(d)	Technical documentation		N/A
-(1)	Separate control gears:		N/A
	The information specified in point 3(c)(2) of this Annex shall also be contained in the technical documentation file drawn up for the purposes of conformity assessment pursuant to Article 8 of Directive 2009/125/EC.		N/A
(e)	Information for products specified in point 3 of Annex III		N/A
	For the light sources and separate control gears specified in point 3 of Annex III the intended purpose shall be stated in the technical documentation for compliance assessment as per Article 5 of this Regulation and on all forms of packaging, product information and advertisement, together with an explicit indication that the light source or separate control gear is not intended for use in other applications.		N/A
	The technical documentation file drawn up for the purposes of conformity assessment, in accordance with Article 5 of this Regulation shall list the technical parameters that make the product design specific to qualify for the exemption.		N/A
	In particular for light sources indicated in point 3(p) of Annex III it shall be stated: 'This light source is only for use by photo sensitive patients. Use of this light source will lead to increased energy cost compared to an equivalent more energy efficient product.'		N/A
ANNEX III	Exemptions		-
1	This Regulation shall not apply to light sources and separate control gears specifically tested and approved to operate:		N/A
(a)	in potentially explosive atmospheres, as defined in Directive 2014/34/EU of the European Parliament and of the Council ⁽¹⁾ ;		N/A
(b)	for emergency use, as set out in Directive 2014/35/EU of the European Parliament and of the Council ⁽²⁾ ;		N/A
(c)	in radiological and nuclear medicine installations, as defined in Article 3 of Council Directive 2009/71/EURATOM ⁽³⁾ ;		N/A

(EU) 2019/2020			
Clause	Requirement + Test	Result – Remark	Verdict
(d)	in or on military or civil defence establishments, equipment, ground vehicles, marine equipment or aircraft, as set out in Member States' regulations or in documents issued by the European Defence Agency;		N/A
(e)	in or on motor vehicles, their trailers and systems, interchangeable towed equipment, components and separate technical units as set out in Regulation (EC) No 661/2009 ⁽⁴⁾ , (EU) No 167/2013 ⁽⁵⁾ and (EU) No 168/2013 of the European Parliament and of the Council ⁽⁶⁾ ;		N/A
(f)	in or on non-road mobile machinery as set out in Regulation (EU) 2016/1628 of the European Parliament and of the Council ⁽⁷⁾ and in or on their trailers;		N/A
(g)	in or on interchangeable equipment as set out in Directive 2006/42/EC of the European Parliament and of the Council ⁽⁸⁾ intended to be towed or to be mounted and fully raised from the ground or that cannot articulate around a vertical axis when the vehicle to which it is attached is in use on a road by vehicles as set out in Regulation (EU) No 167/2013;		N/A
(h)	in or on civil aviation aircraft, as set out in Commission Regulation (EU) No 748/2012 ⁽⁹⁾ ;		N/A
(i)	in railway vehicle lighting, as set out in Directive 2008/57/EC of the European Parliament and of the Council ⁽¹⁰⁾ ;		N/A
(j)	in marine equipment, as set out in Directive 2014/90/EU of the European Parliament and of the Council ⁽¹¹⁾ ;		N/A
(k)	in medical devices, as set out in Council Directive 93/42/EEC ⁽¹²⁾ or Regulation (EU) 2017/745 of the European Parliament and of the Council ⁽¹³⁾ and in vitro medical devices as set out in Directive 98/79/EC of the European Parliament and of the Council ⁽¹⁴⁾ .		N/A
	For the purpose of this point, 'specifically tested and approved' means that the light source or separate control gear:		N/A
	— has been specifically tested for the mentioned operating condition or application, according to the European legislation mentioned or related implementing measures, or relevant European or international standards, or, in the absence of these, according to relevant Member States legislation; and		N/A
	— is accompanied by evidence, to be included in the technical documentation, in the form of a certificate, a type approval mark, a test report, that the product has been specifically approved for the mentioned operating condition or application; and		N/A

(EU) 2019/2020			
Clause	Requirement + Test	Result – Remark	Verdict
	— is placed on the market specifically for the mentioned operating condition or application, as evidenced at least by the technical documentation, and except for point (d), information on the packaging and any advertising or marketing materials.		N/A
2	In addition, this Regulation shall not apply to:		-
(a)	double-capped fluorescent T5 light sources with power $P \leq 13$ W;		N/A
(b)	electronic displays (e.g. televisions, computer monitors, notebooks, tablets, mobile phones, e-readers, game consoles), including displays within the scope of Commission Regulation (EU) 2019/2021 ⁽¹⁵⁾ , and Commission Regulation (EU) No 617/2013 ⁽¹⁶⁾ ;		N/A
(c)	light sources and separate control gears in battery-operated products, including but not limited to e.g. torches, mobile phones with an integrated torch light, toys including light sources, desk lamps operating only on batteries, armband lamps for cyclists, solar-powered garden lamps;		N/A
(d)	light sources for spectroscopy and photometric applications, such as for example UV-VIS spectroscopy, molecular spectroscopy, atomic absorption spectroscopy, nondispersive infrared (NDIR), fourier-transform infrared (FTIR), medical analysis, ellipsometry, layer thickness measurement, process monitoring or environmental monitoring;		N/A
(e)	light sources and separate control gears on bicycles and other non-motorised vehicles.		N/A
3	Any light source or separate control gear within the scope of this Regulation shall be exempt from the requirements of this Regulation, with the exception of the information requirements set out in point 3(e) of Annex II, if they are specifically designed and marketed for their intended use in at least one of the following applications:		-
(a)	signalling (including, but not limited to, road-, railway-, marine- or air traffic- signalling, traffic control or airfield lamps);		N/A
(b)	image capture and image projection (including, but not limited to, photocopying, printing (directly or in pre-processing), lithography, film and video projection, holography);		N/A
(c)	light sources with specific effective ultraviolet power > 2 mW/klm and intended for use in applications requiring high UV-content;		N/A
(d)	light sources with a peak radiation around 253,7 nm and intended for germicidal use (destruction of DNA);		N/A

(EU) 2019/2020												
Clause	Requirement + Test	Result – Remark	Verdict									
(e)	light sources emitting 5 % or more of total radiation power of the range 250-800 nm in the range of 250-315 nm and/or 20 % or more of total radiation power of the range 250-800 nm in the range of 315-400 nm, and intended for disinfection or fly trapping;		N/A									
(f)	light sources with the primary purpose of emitting radiation around 185,1 nm and intended to be used for the generation of ozone;		N/A									
(g)	light sources emitting 40 % or more of total radiation power of the range 250-800 nm in the range of 400-480 nm, and intended for coral zooxanthellae symbioses;		N/A									
(h)	FL light sources emitting 80 % or more of total radiation power of the range 250-800 nm in the range of 250-400 nm, and intended for sun-tanning;		N/A									
(i)	HID light sources emitting 40 % or more of total radiation power of the range 250-800 nm in the range of 250-400 nm, and intended for sun-tanning;		N/A									
(j)	light sources with a photosynthetic efficacy > 1,2 µmol/J, and/or emitting 25 % or more of total radiation power of the range 250-800 nm in the range of 700-800 nm, and intended for use in horticulture;		N/A									
(k)	HID light sources with correlated colour temperature CCT > 7 000 K and intended for use in applications requiring such a high CCT;		N/A									
(l)	light sources with a beam angle of less than 10° and intended for spot-lighting applications requiring a very narrow light beam;		N/A									
(m)	halogen light sources with cap-type G9.5, GX9.5, GY9.5, GZ9.5, GZX9.5, GZY9.5, GZZ9.5, K39d, G9.5HPL, G16d, GES/E40 (low voltage (24V) silver crown only), GX16, GX16d, GY16, G22, G38, GX38, GX38Q, P28s, P40s, PGJX28, PGJX 36, PGJX50, R7s with a luminous flux > 12 000 lm, QXL, designed and marketed specifically for scene-lighting use in film studios, TV studios, and photographic studios, or for stage-lighting use in theatres, discos and during concerts or other entertainment events;		N/A									
(n)	colour-tuneable light sources that can be set to at least the colours listed in this point and which have for each of these colours, measured at the dominant wavelength, a minimum excitation purity of: <table><tr><td>Blue</td><td>440nm — 490nm</td><td>90 %</td></tr><tr><td>Green</td><td>520nm — 570nm</td><td>65 %</td></tr><tr><td>Red</td><td>610nm — 670nm</td><td>95 %</td></tr></table> and are intended for use in applications requiring high-quality coloured light;	Blue	440nm — 490nm	90 %	Green	520nm — 570nm	65 %	Red	610nm — 670nm	95 %		N/A
Blue	440nm — 490nm	90 %										
Green	520nm — 570nm	65 %										
Red	610nm — 670nm	95 %										

(EU) 2019/2020			
Clause	Requirement + Test	Result – Remark	Verdict
(o)	light sources accompanied by an individual calibration certificate detailing the exact radiometric flux and/or spectrum under specified conditions, and intended for use in photometric calibration (of e.g. wavelength, flux, colour temperature, colour rendering index), or for laboratory use or quality control applications for the evaluation of coloured surfaces and materials under standard viewing conditions (e.g. standard illuminants);		N/A
(p)	light sources provided specifically for use by photosensitive patients, to be sold in pharmacies and other authorised selling points (e.g. suppliers of disability products), upon presentation of a medical prescription;		N/A
(q)	incandescent light sources (not including halogen light sources) fulfilling all of the following conditions: power ≤ 40 W, length ≤ 60 mm, diameter ≤ 30 mm, declared suitable for operation at ambient temperature ≥ 300 °C, and intended for use in high temperature applications such as ovens;		N/A
(r)	halogen light sources fulfilling all of the following conditions: cap-type G4, GY6.35 or G9, power ≤ 60 W, declared suitable for operation at ambient temperature ≥ 300 °C, and intended for use in high temperature applications such as ovens;		N/A
(s)	halogen light sources with blade contact-, metal lug-, cable-, litz wire- or non-standard customised electrical interface, specifically designed and marketed for industrial or professional electro-heating equipment (e.g. stretch blow-moulding process in PET-Industry, 3D-printing, gluing, inks, paint and coating hardening);		N/A
(t)	halogen light sources fulfilling all of the following conditions: R7s cap, CCT $\leq 2\,500$ K, length not in the ranges 75-80 mm and 110-120 mm, specifically designed and marketed for industrial or professional electro-heating equipment (e.g. stretch blow-moulding process in PET-Industry, 3D-printing, gluing, inks, paint and coating hardening);		N/A
(u)	single capped fluorescent lamps (CFLni) having a diameter of 16 mm (T5), 2G11 4 pin base, with CCT = 3 200 K and chromaticity coordinates $x = 0,415$ $y = 0,377$, or with CCT = 5 500 K and chromaticity coordinates $x = 0,330$ $y = 0,335$, specifically designed and marketed for studio and video applications for traditional filmmaking;		N/A
(v)	LED or OLED light sources, complying with the definition of 'original works of art' as defined in Directive 2001/84/EC of the European Parliament and of the Council (17), made by the artist him/herself in a limited number below 10 pieces;		N/A

Tel: (86)755-85277785

Fax: (86)755-23705230

E-mail: postmaster@aoc-cert.comWebsite: <http://www.aoc-cert.com>

(EU) 2019/2020			
Clause	Requirement + Test	Result – Remark	Verdict
(w)	white light sources which		N/A
-(1)	are designed and marketed specifically for scene-lighting use in film-studios, TV-studios and locations, and photographic-studios and locations, or for stage-lighting use in theatres, during concerts or other entertainment events;		N/A
-(2)	provide two or more of the following specifications:		N/A
--(a)	LED with high CRI > 90;		N/A
--(b)	GES/E40, K39d socket with changeable Colour Temperature down to 1 800 K (undimmed), used with low voltage power supply;		N/A
--(c)	LED rated at 180W and greater and arranged to direct output to an area smaller than the light emitting surface;		N/A
--(d)	DWE lamp type which is a tungsten lamp defined by its wattage (650 W) voltage (120 V) and terminal type (pressure screw terminal);		N/A
--(e)	white bi-colour LED sources;		N/A
--(f)	fluorescent tubes: Min BI Pin T5 and Bi Pin T7 With CRI ≥ 85 and CCT 2 900, 3 000, 3 200, 5 600 or 6 500 K.		N/A
4	CLS and CSCG designed and marketed specifically for scene-lighting use in film-studios, TV-studios and locations, and photographic studios and locations, or for stage-lighting use in theatres, discos and during concerts or other entertainment events, for connection to high speed control networks (utilising signalling rates of 250 000 bits per second and higher) in always-listening mode, shall be exempt from the requirements on standby (Psb) and on networked standby (Pnet) of points 1(a) and 1(b) of Annex II.		-
ANNEX IV	Verification procedure for market surveillance purposes		N/A
ANNEX V	Functionality after endurance testing		-
	Models of LED- and OLED- light sources shall undergo endurance testing to verify their lumen maintenance and survival factor. This endurance testing consists of the test method outlined below. The authorities of a Member State shall test 10 units of the model for this test.		P
	The endurance test for LED and OLED light sources shall be conducted as follows:		P
(a)	Ambient conditions and test setup:		P
-(i)	The switching cycles are to be conducted in a room with an ambient temperature of 25 ± 10 °C and an average air velocity of less than 0,2 m/s.		P

(EU) 2019/2020			
Clause	Requirement + Test	Result – Remark	Verdict
-(ii)	The switching cycles on the sample shall be conducted in free air in a vertical base-up position. However, if a manufacturer or importer has declared the light source suitable for use in a specific orientation only, then the sample shall be mounted in that orientation.		P
-(iii)	The applied voltage during the switching cycles shall have a tolerance within 2 %. The total harmonic content of the supply voltage shall not exceed 3 %. Standards provide guidance on the supply voltage source. Light sources designed to be operated on mains voltage shall be tested at 220-240 V, 50 Hz supply, even if the products are able to be operated on variable supply conditions.		N/A
(b)	Endurance test method:		P
-(i)	Initial flux measurement: measure the luminous flux of the light source prior to starting the endurance test switching cycle.		P
-(ii)	Switching cycles: operate the light source for 1 200 cycles of repeated, continuous switching cycles without interruption. One complete switching cycle consists of 150 minutes of the light source switched ON at full power followed by 30 minutes of the light source switched OFF. The hours of operation recorded (i.e. 3 000 hours) include only the periods of the switching cycle when the light source was switched ON, i.e. the total test time is 3 600 hours.		P
-(iii)	Final flux measurement: at the end of the 1 200 switching cycles, note if any light sources have failed (see 'Survival factor' in Annex IV, Table 6 of this Regulation) and measure the luminous flux of the light sources that have not failed.		P
-(iv)	For each of the units in the sample which have not failed, divide the measured final flux by the measured initial flux. Average the resulting values over all the units that did not fail to compute the determined value for the lumen maintenance factor XLMF %.		P

Table

Table 1

Model No.: GLV71972151/I0-NB10TLT184922

Sample No.	Pon(W)	No-load power $P_{no}(W)$	Standby power $P_{sb}(W)$	Networked standby power $P_{net}(W)$	Displacement factor
S01	9.88	N/A	N/A	N/A	0.92
S02	9.95	N/A	N/A	N/A	0.93
S03	9.79	N/A	N/A	N/A	0.95
S04	9.96	N/A	N/A	N/A	0.90
S05	9.98	N/A	N/A	N/A	0.91
S06	9.78	N/A	N/A	N/A	0.93
S07	10.00	N/A	N/A	N/A	0.94
S08	9.85	N/A	N/A	N/A	0.92
S09	9.82	N/A	N/A	N/A	0.93
S10	9.85	N/A	N/A	N/A	0.90
Average value	9.89	N/A	N/A	N/A	0.92
limit value	≤ 10.68	N/A	N/A	N/A	≥ 0.7

Table 1

Model No.: GLV71972151/I0-NB10TLT184927

Sample No.	Pon(W)	No-load power $P_{no}(W)$	Standby power $P_{sb}(W)$	Networked standby power $P_{net}(W)$	Displacement factor
S01	10.06	N/A	N/A	N/A	0.91
S02	10.25	N/A	N/A	N/A	0.93
S03	10.08	N/A	N/A	N/A	0.91
S04	10.20	N/A	N/A	N/A	0.91
S05	10.28	N/A	N/A	N/A	0.93
S06	10.09	N/A	N/A	N/A	0.91
S07	10.35	N/A	N/A	N/A	0.93
S08	10.09	N/A	N/A	N/A	0.91
S09	10.14	N/A	N/A	N/A	0.92
S10	10.13	N/A	N/A	N/A	0.93
Average value	10.17	N/A	N/A	N/A	0.92
limit value	≤ 11.29	N/A	N/A	N/A	≥ 0.7

Table 1

Model No.: GLV71972151/I0-NB10TLT184930

Sample No.	Pon(W)	No-load power $P_{no}(W)$	Standby power $P_{sb}(W)$	Networked standby power $P_{net}(W)$	Displacement factor
S01	10.12	N/A	N/A	N/A	0.92
S02	10.17	N/A	N/A	N/A	0.91

Tel: (86)755-85277785

Fax: (86)755-23705230

E-mail: postmaster@aoc-cert.comWebsite: <http://www.aoc-cert.com>

IECEE TRF No. (EU) 2019/2020

Table

S03	10.08	N/A	N/A	N/A	0.91
S04	10.15	N/A	N/A	N/A	0.91
S05	10.10	N/A	N/A	N/A	0.91
S06	10.11	N/A	N/A	N/A	0.90
S07	10.15	N/A	N/A	N/A	0.90
S08	10.08	N/A	N/A	N/A	0.91
S09	10.14	N/A	N/A	N/A	0.91
S10	10.17	N/A	N/A	N/A	0.90
Average value	10.13	N/A	N/A	N/A	0.91
limit value	≤11.67	N/A	N/A	N/A	≥ 0.7

Table 1

Model No.: GLV71972151/I0-NB10TLT184940

Sample No.	Pon(W)	No-load power $P_{no}(W)$	Standby power $P_{sb}(W)$	Networked standby power $P_{net}(W)$	Displacement factor
S01	10.01	N/A	N/A	N/A	0.92
S02	10.06	N/A	N/A	N/A	0.91
S03	9.97	N/A	N/A	N/A	0.91
S04	10.04	N/A	N/A	N/A	0.91
S05	9.99	N/A	N/A	N/A	0.91
S06	10.00	N/A	N/A	N/A	0.90
S07	10.04	N/A	N/A	N/A	0.90
S08	9.97	N/A	N/A	N/A	0.91
S09	10.03	N/A	N/A	N/A	0.91
S10	10.06	N/A	N/A	N/A	0.90
Average value	10.02	N/A	N/A	N/A	0.91
limit value	≤12.75	N/A	N/A	N/A	≥ 0.7

Table 1

Model No.: GLV71972151/I0-NB10TLT184840

Sample No.	Pon(W)	No-load power $P_{no}(W)$	Standby power $P_{sb}(W)$	Networked standby power $P_{net}(W)$	Displacement factor
S01	9.87	N/A	N/A	N/A	0.91
S02	10.06	N/A	N/A	N/A	0.93
S03	9.89	N/A	N/A	N/A	0.91
S04	10.01	N/A	N/A	N/A	0.91
S05	10.09	N/A	N/A	N/A	0.93
S06	9.90	N/A	N/A	N/A	0.91
S07	10.16	N/A	N/A	N/A	0.93
S08	9.90	N/A	N/A	N/A	0.91

Table

S09	9.95	N/A	N/A	N/A	0.92
S10	9.94	N/A	N/A	N/A	0.93
Average value	9.98	N/A	N/A	N/A	0.92
limit value	≤13.64	N/A	N/A	N/A	≥ 0.7

Table 2

Model No.: GLV71972151/I0-NB10TLT184922

Ponmax = C × (L + Φuse / (F × η)) × R										
P _{onmax} (W)	C	L	Φuse / (F × η)	Φuse	F	η	R=(CRI+80)/16 0	CRI	80	160
10.68	1.08	1.5	7.70	923.4	1	120	1.08	92	80	160

Table 2

Model No.: GLV71972151/I0-NB10TLT184927

Ponmax = C × (L + Φuse / (F × η)) × R										
P _{onmax} (W)	C	L	Φuse / (F × η)	Φuse	F	η	R=(CRI+80)/16 0	CRI	80	160
11.29	1.08	1.5	8.26	991.4	1	120	1.07	91.4	80	160

Table 2

Model No.: GLV71972151/I0-NB10TLT184930

Ponmax = C × (L + Φuse / (F × η)) × R										
P _{onmax} (W)	C	L	Φuse / (F × η)	Φuse	F	η	R=(CRI+80)/16 0	CRI	80	160
11.67	1.08	1.5	8.49	1018.5	1	120	1.08	93.1	80	160

Table 2

Model No.: GLV71972151/I0-NB10TLT184940

Ponmax = C × (L + Φuse / (F × η)) × R										
P _{onmax} (W)	C	L	Φuse / (F × η)	Φuse	F	η	R=(CRI+80)/16 0	CRI	80	160
12.75	1.08	1.5	9.37	1124.7	1	120	1.09	93.7	80	160

Table 2

Model No.: GLV71972151/I0-NB10TLT184840

Ponmax = C × (L + Φuse / (F × η)) × R										
P _{onmax} (W)	C	L	Φuse / (F × η)	Φuse	F	η	R=(CRI+80)/16 0	CRI	80	160
13.64	1.08	1.5	10.94	1312.2	1	120	1.02	82.5	80	160

Table

Table 3

Model No.: GLV71972151/I0-NB10TLT184922

Sample No.	Chromaticity Coordinates		CCT(K)	CRI	SDCM	R9
	x	y				
S01	0.4984	0.4137	2232	92.0	1.8	53
S02	0.5019	0.4164	2251	92.4	0.5	53
S03	0.5009	0.4147	2247	91.9	0.5	52
S04	0.5024	0.4162	2237	91.8	0.4	53
S05	0.4994	0.4142	2240	92.2	1.3	52
S06	0.4993	0.4139	2244	91.9	1.3	54
S07	0.5005	0.4139	2231	92.1	0.7	53
S08	0.5017	0.4151	2244	91.7	0.1	53
S09	0.5014	0.4147	2249	92.1	0.3	53
S10	0.5004	0.4163	2236	92.0	1.3	54
Average value	0.5006	0.4149	2241	92.0	0.8	53

Table 3

Model No.: GLV71972151/I0-NB10TLT184927

Sample No.	Chromaticity Coordinates		CCT(K)	CRI	SDCM	R9
	x	y				
S01	0.4536	0.4035	2711	91.3	3.7	51
S02	0.4568	0.4055	2749	91.7	2.9	52
S03	0.4550	0.4039	2737	91.5	3.5	52
S04	0.4573	0.4055	2740	91.2	2.9	51
S05	0.4545	0.4047	2752	91.4	3.2	52
S06	0.4554	0.4031	2736	91.5	3.9	51
S07	0.4541	0.4027	2670	91.3	4.0	52
S08	0.4559	0.4043	2673	91.1	3.3	52
S09	0.4564	0.4039	2645	91.4	3.6	51
S10	0.4554	0.4055	2617	91.5	2.8	52
Average value	0.4554	0.4042	2703	91.4	3.4	52

Table 3

Model No.: GLV71972151/I0-NB10TLT184930

Sample No.	Chromaticity Coordinates		CCT(K)	CRI	SDCM	R9
	x	y				
S01	0.4330	0.3999	3011	93.1	3.6	60
S02	0.4361	0.4019	3027	93.3	2.2	61
S03	0.4343	0.4003	3033	93.2	2.9	61
S04	0.4365	0.4019	2990	92.9	1.9	60
S05	0.4339	0.4011	3027	93.0	3.3	62

Tel: (86)755-85277785

Fax: (86)755-23705230

E-mail: postmaster@aoc-cert.comWebsite: <http://www.aoc-cert.com>

IECEE TRF No. (EU) 2019/2020

Table

S06	0.4332	0.3995	3044	93.2	3.5	63
S07	0.4335	0.3991	2977	93.1	3.3	61
S08	0.4352	0.4007	3010	92.9	2.5	62
S09	0.4356	0.4003	3037	93.2	2.2	62
S10	0.4348	0.4019	2983	93.2	3.0	60
Average value	0.4346	0.4007	3014	93.1	2.8	61

Table 3

Model No.: GLV71972151/I0-NB10TLT184940

Sample No.	Chromaticity Coordinates		CCT(K)	CRI	SDCM	R9
	x	y				
S01	0.3793	0.3762	3984	93.7	1.7	67
S02	0.3820	0.3781	4004	93.9	2.0	68
S03	0.3804	0.3766	4012	93.8	1.9	67
S04	0.3823	0.3781	3955	93.5	2.3	68
S05	0.3801	0.3773	4004	93.6	1.4	66
S06	0.3794	0.3758	4026	93.8	1.9	68
S07	0.3797	0.3754	3938	93.7	2.2	68
S08	0.3812	0.3769	3981	93.5	2.1	67
S09	0.3816	0.3766	4018	93.8	2.5	68
S10	0.3808	0.3781	3946	93.8	1.4	67
Average value	0.3807	0.3769	3987	93.7	1.9	67

Table 3

Model No.: GLV71972151/I0-NB10TLT184840

Sample No.	Chromaticity Coordinates		CCT(K)	CRI	SDCM	R9
	x	y				
S01	0.3803	0.3826	4025	82.4	1.2	4
S02	0.3830	0.3845	4081	82.7	1.7	3
S03	0.3814	0.3829	4064	82.5	1.1	4
S04	0.3833	0.3845	4068	82.3	1.8	4
S05	0.3811	0.3837	4085	82.5	1.5	4
S06	0.3818	0.3822	4062	82.6	0.9	3
S07	0.3807	0.3818	3964	82.4	0.7	4
S08	0.3822	0.3833	3968	82.2	1.3	4
S09	0.3826	0.3829	3927	82.5	1.3	4
S10	0.3818	0.3845	3886	82.5	1.7	3
Average value	0.3818	0.3833	4013	82.5	1.3	4

Table

Table 4

Model No.: GLV71972151/I0-NB10TLT184922

Sample No.	Useful luminous flux Φ_{use} (lm) at 0h	Useful luminous flux Φ use (lm) at 3600h	Lumen maintenance factor	Survival factor	Beam angle(°)	Peak luminous intensity (cd)
S01	906.2	892.5	98.48%	100%	N/A	N/A
S02	929.0	917.7	98.79%	100%	N/A	N/A
S03	938.0	924.4	98.55%	100%	N/A	N/A
S04	923.4	911.0	98.65%	100%	N/A	N/A
S05	911.8	894.3	98.08%	100%	N/A	N/A
S06	919.2	903.3	98.27%	100%	N/A	N/A
S07	915.9	902.2	98.50%	100%	N/A	N/A
S08	920.7	904.0	98.18%	100%	N/A	N/A
S09	922.6	910.5	98.68%	100%	N/A	N/A
S10	947.3	932.9	98.48%	100%	N/A	N/A
Average value	923.4	909.3	98.47%	100%	N/A	N/A

Table 4

Model No.: GLV71972151/I0-NB10TLT184927

Sample No.	Useful luminous flux Φ_{use} (lm) at 0h	Useful luminous flux Φ use (lm) at 3600h	Lumen maintenance factor	Survival factor	Beam angle(°)	Peak luminous intensity (cd)
S01	980.7	971.7	99.09%	100%	N/A	N/A
S02	997.2	985.8	98.85%	100%	N/A	N/A
S03	1005.1	991.7	98.67%	100%	N/A	N/A
S04	991.6	972.5	98.08%	100%	N/A	N/A
S05	984.8	967.3	98.22%	100%	N/A	N/A
S06	987.5	974.3	98.67%	100%	N/A	N/A
S07	988.3	970.4	98.18%	100%	N/A	N/A
S08	994.5	977.9	98.33%	100%	N/A	N/A
S09	982.9	964.4	98.12%	100%	N/A	N/A
S10	1001.4	985.7	98.43%	100%	N/A	N/A
Average value	991.4	976.2	98.46%	100%	N/A	N/A

Table 4

Model No.: GLV71972151/I0-NB10TLT184930

Sample No.	Useful luminous flux	Useful luminous flux Φ	Lumen maintenance factor	Survival factor	Beam angle(°)	Peak luminous intensity (cd)
------------	-------------------------	-----------------------------------	--------------------------------	-----------------	---------------	---------------------------------

Tel: (86)755-85277785

Fax: (86)755-23705230

E-mail: postmaster@aoc-cert.comWebsite: <http://www.aoc-cert.com>

Table

	Φ_{use} (lm) at 0h	use (lm) at 3600h				
S01	1018.4	1005.3	98.71%	100%	N/A	N/A
S02	1026.9	1013.0	98.65%	100%	N/A	N/A
S03	1032.1	1016.7	98.51%	100%	N/A	N/A
S04	1024.1	1013.9	99.01%	100%	N/A	N/A
S05	1019.1	1004.6	98.58%	100%	N/A	N/A
S06	1012.8	1000.4	98.78%	100%	N/A	N/A
S07	1022.0	1005.9	98.42%	100%	N/A	N/A
S08	990.5	977.8	98.72%	100%	N/A	N/A
S09	1009.7	995.8	98.62%	100%	N/A	N/A
S10	1029.3	1014.4	98.55%	100%	N/A	N/A
Average value	1018.5	1004.8	98.65%	100%	N/A	N/A

Table 4

Model No.: GLV71972151/I0-NB10TLT184940

Sample No.	Useful luminous flux Φ_{use} (lm) at 0h	Useful luminous flux Φ use (lm) at 3600h	Lumen maintenance factor	Survival factor	Beam angle(°)	Peak luminous intensity (cd)
S01	1124.6	1107.9	98.51%	100%	N/A	N/A
S02	1133.9	1116.4	98.45%	100%	N/A	N/A
S03	1139.7	1120.4	98.31%	100%	N/A	N/A
S04	1130.8	1117.4	98.81%	100%	N/A	N/A
S05	1125.3	1107.1	98.38%	100%	N/A	N/A
S06	1118.3	1102.5	98.59%	100%	N/A	N/A
S07	1128.6	1108.6	98.23%	100%	N/A	N/A
S08	1093.8	1077.6	98.52%	100%	N/A	N/A
S09	1115.0	1097.4	98.43%	100%	N/A	N/A
S10	1136.6	1117.9	98.35%	100%	N/A	N/A
Average value	1124.7	1107.3	98.46%	100%	N/A	N/A

Table 4

Model No.: GLV71972151/I0-NB10TLT184840

Sample No.	Useful luminous flux Φ_{use} (lm) at 0h	Useful luminous flux Φ use (lm) at 3600h	Lumen maintenance factor	Survival factor	Beam angle(°)	Peak luminous intensity (cd)
S01	1298.0	1289.5	99.35%	100%	N/A	N/A
S02	1319.9	1308.2	99.11%	100%	N/A	N/A

Table

S03	1330.3	1316.1	98.93%	100%	N/A	N/A
S04	1312.4	1290.5	98.34%	100%	N/A	N/A
S05	1303.4	1283.6	98.48%	100%	N/A	N/A
S06	1307.0	1293.0	98.93%	100%	N/A	N/A
S07	1308.1	1287.8	98.44%	100%	N/A	N/A
S08	1316.3	1297.7	98.59%	100%	N/A	N/A
S09	1300.9	1279.8	98.38%	100%	N/A	N/A
S10	1325.4	1308.1	98.69%	100%	N/A	N/A
Average value	1312.2	1295.4	98.72%	100%	N/A	N/A

Table 5

Model No.: GLV71972151/I0-NB10TLT184922

Sample No.	Flicker for LED and OLED MLS ($P_{st} LM \leq 1.0$)	Stroboscopic effect for LED and OLED MLS ($SVM \leq 0.9$; From 1 September 2024: $SVM \leq 0.4$)
S01	0.196	0.049
S02	0.222	0.039
S03	0.200	0.043
S04	0.249	0.046
S05	0.228	0.045
S06	0.264	0.042
S07	0.252	0.046
S08	0.213	0.042
S09	0.207	0.045
S10	0.214	0.043
Average value	0.224	0.044

Table 5

Model No.: GLV71972151/I0-NB10TLT184927

Sample No.	Flicker for LED and OLED MLS ($P_{st} LM \leq 1.0$)	Stroboscopic effect for LED and OLED MLS ($SVM \leq 0.9$; From 1 September 2024: $SVM \leq 0.4$)
S01	0.163	0.079
S02	0.170	0.076
S03	0.166	0.068
S04	0.209	0.066
S05	0.180	0.070
S06	0.218	0.077
S07	0.206	0.058
S08	0.209	0.083
S09	0.175	0.068

Tel: (86)755-85277785

Fax: (86)755-23705230

E-mail: postmaster@aoc-cert.comWebsite: <http://www.aoc-cert.com>

IECEE TRF No. (EU) 2019/2020

Table

S10	0.197	0.071
Average value	0.189	0.072

Table 5

Model No.: GLV71972151/I0-NB10TLT184930

Sample No.	Flicker for LED and OLED MLS ($P_{st} LM \leq 1.0$)	Stroboscopic effect for LED and OLED MLS ($SVM \leq 0.9$; From 1 September 2024: $SVM \leq 0.4$)
S01	0.137	0.060
S02	0.155	0.055
S03	0.113	0.057
S04	0.128	0.055
S05	0.111	0.051
S06	0.118	0.058
S07	0.109	0.056
S08	0.149	0.055
S09	0.143	0.062
S10	0.120	0.057
Average value	0.128	0.057

Table 5

Model No.: GLV71972151/I0-NB10TLT184940

Sample No.	Flicker for LED and OLED MLS ($P_{st} LM \leq 1.0$)	Stroboscopic effect for LED and OLED MLS ($SVM \leq 0.9$; From 1 September 2024: $SVM \leq 0.4$)
S01	0.260	0.054
S02	0.296	0.050
S03	0.216	0.052
S04	0.244	0.050
S05	0.212	0.047
S06	0.224	0.053
S07	0.208	0.051
S08	0.284	0.050
S09	0.272	0.057
S10	0.228	0.051
Average value	0.244	0.051

Table 5

Model No.: GLV71972151/I0-NB10TLT184840

Sample No.	Flicker for LED and OLED MLS ($P_{st} LM \leq 1.0$)	Stroboscopic effect for LED and OLED MLS ($SVM \leq 0.9$; From 1 September 2024: $SVM \leq 0.4$)
S01	0.156	0.052
S02	0.163	0.050

Table

S03	0.159	0.044
S04	0.200	0.043
S05	0.173	0.046
S06	0.209	0.051
S07	0.198	0.038
S08	0.200	0.054
S09	0.168	0.044
S10	0.189	0.047
Average value	0.181	0.047

Table 6

Model No.: /

Sample No.	Control gear efficiency
-	-
-	-
-	-
Average value	-

Table

Table 7

Model No.: GLV71972151/I0-NB10TLT184922

Spectral Distribution


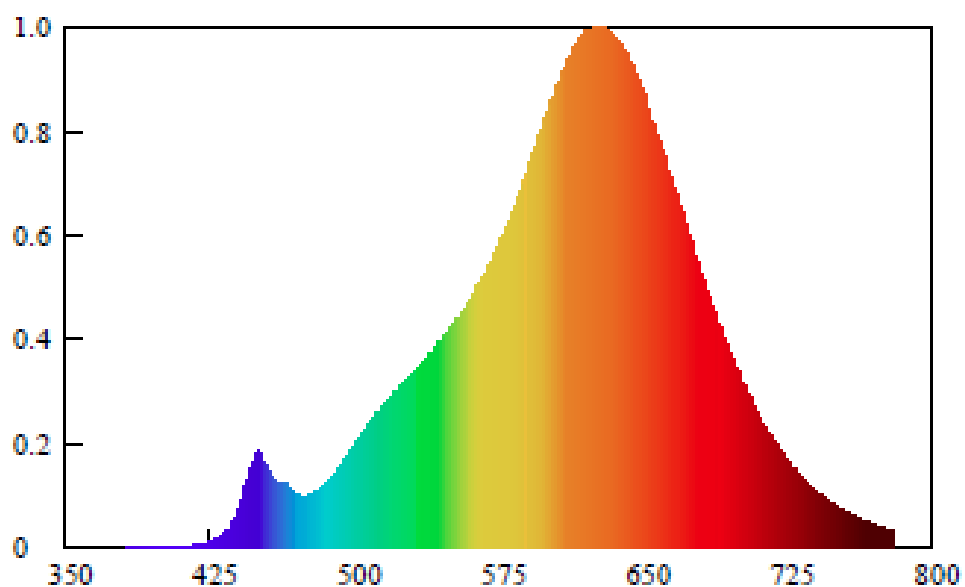


Table 7

Model No.: GLV71972151/I0-NB10TLT184927

Spectral Distribution

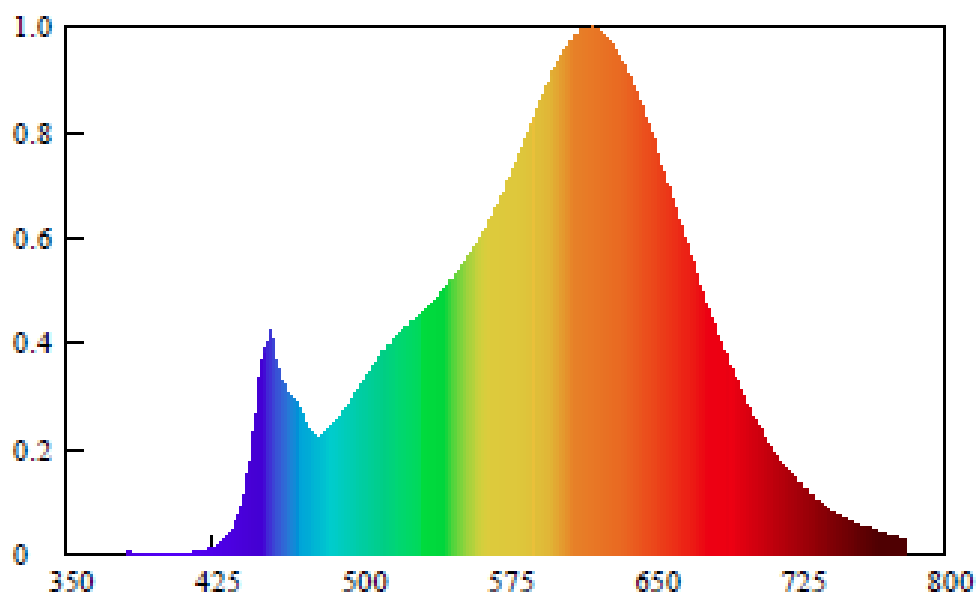

Table

Table 7

Model No.: GLV71972151/I0-NB10TLT184930

Spectral Distribution


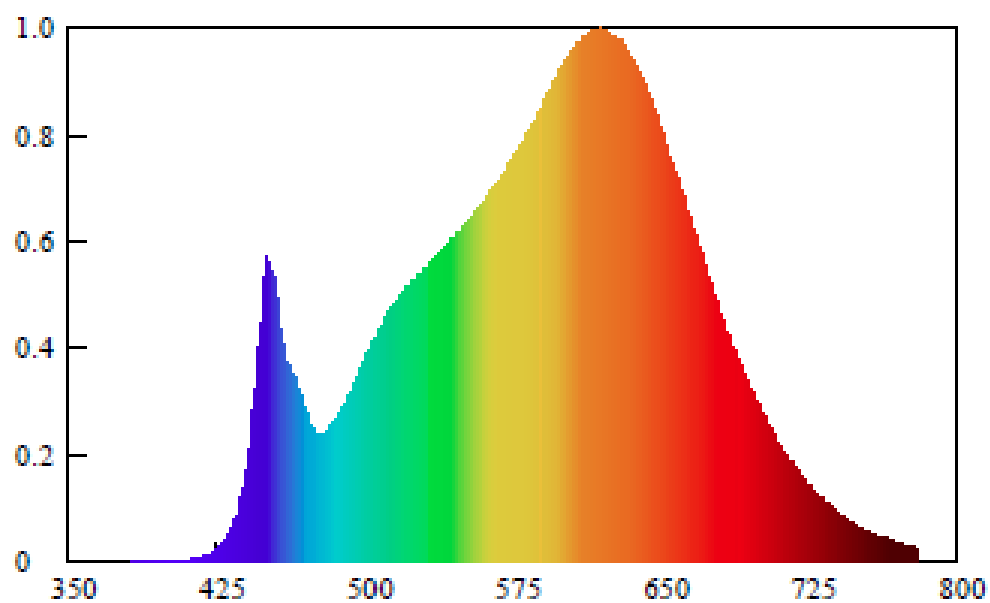


Table 7

Model No.: GLV71972151/I0-NB10TLT184940

Spectral Distribution

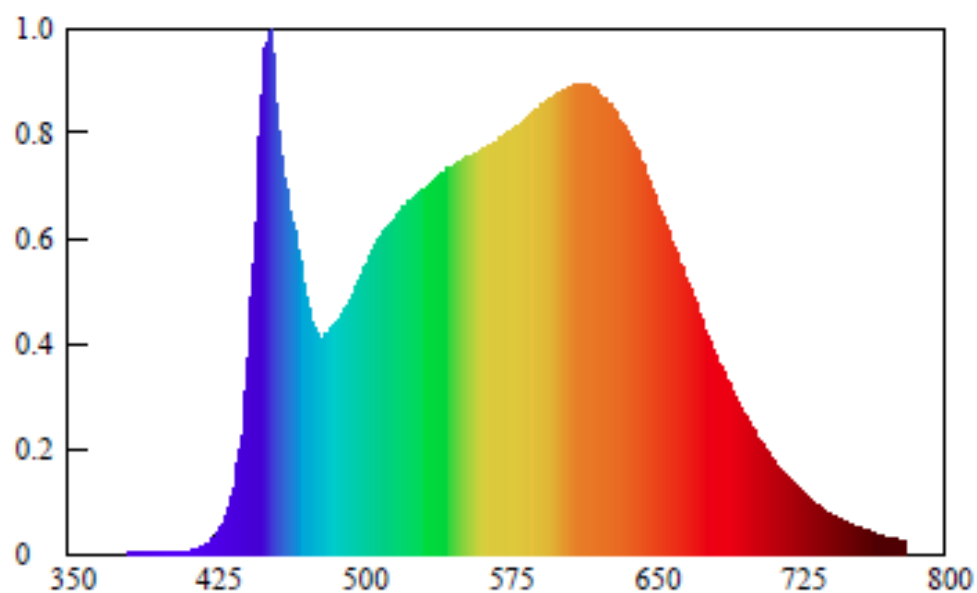


Table


Table 7

Model No.: GLV71972151/I0-NB10TLT184840

Spectral Distribution

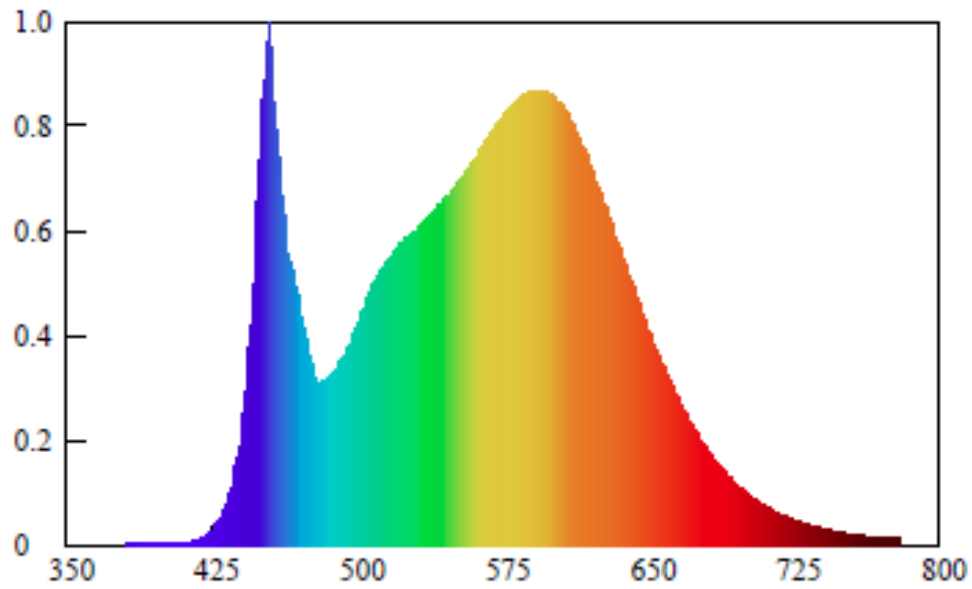

(EU) 2019/2015																			
Clause	Requirement + Test	Result – Remark	Verdict																
ANNEX II	Energy efficiency classes and calculation method		-																
	The energy efficiency class of light sources shall be determined as set out in Table 1, on the basis of the total mains efficacy η_{TM} , which is calculated by dividing the declared useful luminous flux Φ_{use} (expressed in lm) by the declared on-mode power consumption P_{on} (expressed in W) and multiplying by the applicable factor F_{TM} of Table 2, as follows:		P																
	$\eta_{TM} = (\Phi_{use}/P_{on}) \times F_{TM}$ (lm/W).	See table 8	P																
	<table><tr><td>Energy efficiency class</td><td>Total mains efficacy η_{TM} (lm/W)</td></tr><tr><td>A</td><td>$210 \leq \eta_{TM}$</td></tr><tr><td>B</td><td>$185 \leq \eta_{TM} < 210$</td></tr><tr><td>C</td><td>$160 \leq \eta_{TM} < 185$</td></tr><tr><td>D</td><td>$135 \leq \eta_{TM} < 160$</td></tr><tr><td>E</td><td>$110 \leq \eta_{TM} < 135$</td></tr><tr><td>F</td><td>$85 \leq \eta_{TM} < 110$</td></tr><tr><td>G</td><td>$\eta_{TM} < 85$</td></tr></table>	Energy efficiency class	Total mains efficacy η_{TM} (lm/W)	A	$210 \leq \eta_{TM}$	B	$185 \leq \eta_{TM} < 210$	C	$160 \leq \eta_{TM} < 185$	D	$135 \leq \eta_{TM} < 160$	E	$110 \leq \eta_{TM} < 135$	F	$85 \leq \eta_{TM} < 110$	G	$\eta_{TM} < 85$	See table 8	P
Energy efficiency class	Total mains efficacy η_{TM} (lm/W)																		
A	$210 \leq \eta_{TM}$																		
B	$185 \leq \eta_{TM} < 210$																		
C	$160 \leq \eta_{TM} < 185$																		
D	$135 \leq \eta_{TM} < 160$																		
E	$110 \leq \eta_{TM} < 135$																		
F	$85 \leq \eta_{TM} < 110$																		
G	$\eta_{TM} < 85$																		
	<table><tr><td colspan="2">Factors F_{TM} by light source type</td></tr><tr><td>Light source type</td><td>Factor F_{TM}</td></tr><tr><td>Non-directional (NDLS) operating on mains (MLS)</td><td>1,000</td></tr><tr><td>Non-directional (NDLS) not operating on mains (NMLS)</td><td>0,926</td></tr><tr><td>Directional (DLS) operating on mains (MLS)</td><td>1,176</td></tr><tr><td>Directional (DLS) not operating on mains (NMLS)</td><td>1,089</td></tr></table>	Factors F_{TM} by light source type		Light source type	Factor F_{TM}	Non-directional (NDLS) operating on mains (MLS)	1,000	Non-directional (NDLS) not operating on mains (NMLS)	0,926	Directional (DLS) operating on mains (MLS)	1,176	Directional (DLS) not operating on mains (NMLS)	1,089		-				
Factors F_{TM} by light source type																			
Light source type	Factor F_{TM}																		
Non-directional (NDLS) operating on mains (MLS)	1,000																		
Non-directional (NDLS) not operating on mains (NMLS)	0,926																		
Directional (DLS) operating on mains (MLS)	1,176																		
Directional (DLS) not operating on mains (NMLS)	1,089																		
ANNEX III	Label for light sources		-																
1	LABEL		-																
	If the light source is intended to be marketed through a point of sale, a label produced in the format and containing information as set out in this Annex is printed on the individual packaging.		P																
	Suppliers shall choose a label format between point 1.1 and point 1.2 of this Annex.		P																
	The label shall be:		P																

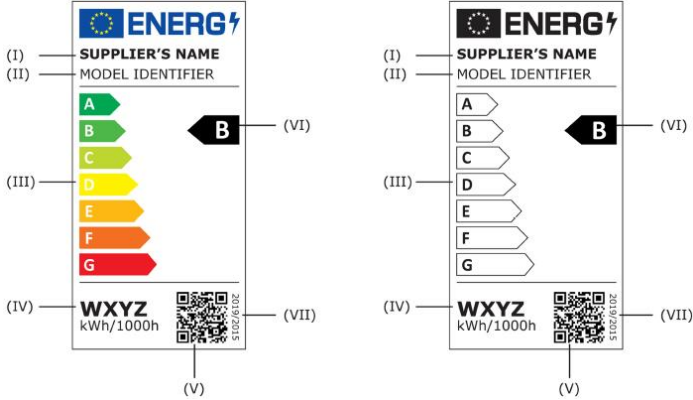(EU) 2019/2015			
Clause	Requirement + Test	Result – Remark	Verdict
	— for the standard-sized label at least 36 mm wide and 75 mm high;		N/A
	— for the small-sized label (width less than 36 mm) at least 20 mm wide and 54 mm high.		P
	The packaging shall not be smaller than 20 mm wide and 54 mm high.		P
	Where the label is printed in a larger format, its content shall nevertheless remain proportionate to the specifications above. The small-sized label shall not be used on packaging with a width of 36 mm or more.		P
	The label and the arrow indicating the energy efficiency class may be printed in monochrome as specified in points 1.1 and 1.2, only if all other information, including graphics, on the packaging is printed in monochrome.		P
	If the label is not printed on the part of the packaging meant to face the prospective customer, an arrow containing the letter of the energy efficiency class shall be displayed as hereafter, with the colour of the arrow matching the letter and the colour of the energy class. The size shall be such that the label is clearly visible and legible. The letter in the energy efficiency class arrow shall be Calibri Bold and positioned in the centre of the rectangular part of the arrow, with a border of 0,5 pt in 100 % black placed around the arrow and the letter of the efficiency class.		N/A
	Figure 1 Coloured/monochrome left/right arrow for the part of the packaging facing the prospective customer 		N/A
1.1	Standard-sized label:		N/A
			N/A

(EU) 2019/2015			
Clause	Requirement + Test	Result – Remark	Verdict
1.2	Small-sized label:		P
			P
1.3	The following information shall be included in the label for light sources:		P
	I. supplier's name or trade mark;		P
	II. supplier's model identifier;		P
	III. scale of energy efficiency classes from A to G;		P
	IV. the energy consumption, expressed in kWh of electricity consumption per 1 000 hours, of the light source in on-mode;		P
	V. QR-code;		P
	VI. the energy efficiency class in accordance with Annex II;		P
	VII. the number of this Regulation that is '2019/2015'.		P

Table 8 a

Model No.: GLV71972151/I0-NB10TLT184922

Energy efficiency class				
Total mains efficacy η_{TM} (lm/W)	Useful luminous flux Φ_{use} (lm) at 0h	$P_{on}(W)$	Factor F_{TM}	Energy Efficiency Class
93.4	923.4	9.89	1.000	F

Table 8 a

Model No.: GLV71972151/I0-NB10TLT184927

Energy efficiency class				
Total mains efficacy η_{TM} (lm/W)	Useful luminous flux Φ_{use} (lm) at 0h	$P_{on}(W)$	Factor F_{TM}	Energy Efficiency Class
97.5	991.4	10.17	1.000	F

Table 8 a

Model No.: GLV71972151/I0-NB10TLT184930

Energy efficiency class				
Total mains efficacy η_{TM} (lm/W)	Useful luminous flux Φ_{use} (lm) at 0h	$P_{on}(W)$	Factor F_{TM}	Energy Efficiency Class
100.5	1018.5	10.13	1.000	F

Table 8 a

Model No.: GLV71972151/I0-NB10TLT184940

Energy efficiency class				
Total mains efficacy η_{TM} (lm/W)	Useful luminous flux Φ_{use} (lm) at 0h	$P_{on}(W)$	Factor F_{TM}	Energy Efficiency Class
112.2	1124.7	10.02	1.000	E

Table 8 a

Model No.: GLV71972151/I0-NB10TLT184840

Energy efficiency class				
Total mains efficacy η_{TM} (lm/W)	Useful luminous flux Φ_{use} (lm) at 0h	$P_{on}(W)$	Factor F_{TM}	Energy Efficiency Class
131.5	1312.2	9.98	1.000	E

Test Equipment List

Equipment Name	Manufacturer	Model No.	Reference No.	Calibration Due Date
2m Integrating Sphere	SENSING	SL-300	AOC-S-126	2026-04-13
Horizontal Distribution Photometer	SENSING	GMS1800D	AOC-S-124	2026-04-13
Standard Lamp	SENSING	240V/150W	AOC-S-151	2025-08-01
Digital power meter	HENGHE	WT310E	AOC-S-012	2026-04-13
Digital power meter	SENSING	UI2008	AOC-S-123	2026-04-13
Digital power meter	SENSING	UI2021	AOC-S-123	2026-04-13
DC source	OYHS	OYHS-Z120V-50A	AOC-S-062	2026-04-13
Variable frequency power supply	WOSEN	BP6005	AOC-S-129	2026-04-13
Variable frequency power supply	AIPUSI	KDF-500	AOC-S-130	2026-04-13
Oscilloscope	TEKTRONIX	MDO3012	AOC-S-028	2026-04-13

Product Photo

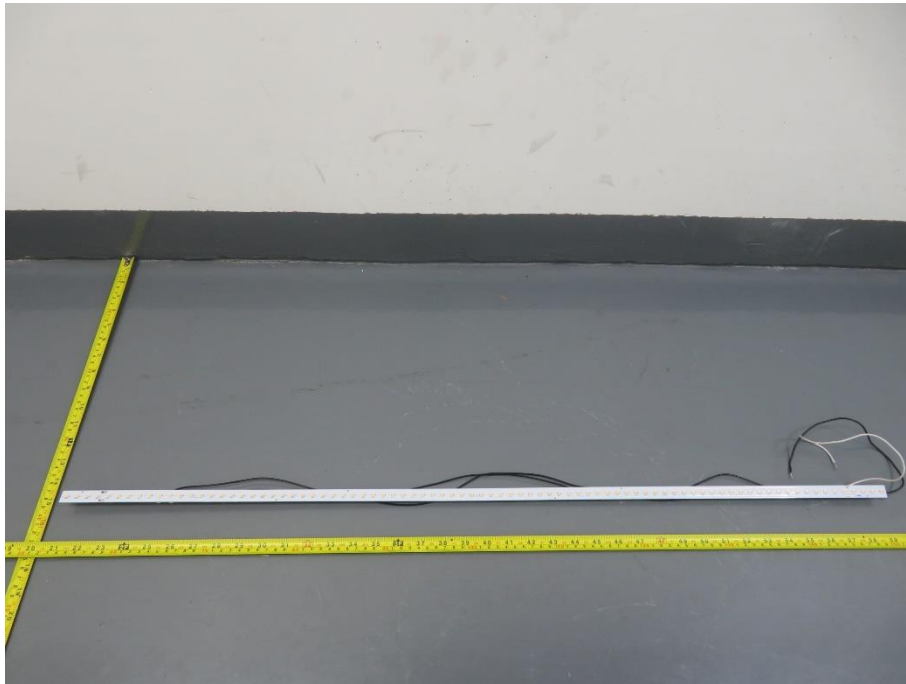


Fig. 1(Model name: GLV71RW4151-50-NB03TLT128922)



Fig. 2(Model name: GLV71RW4151-50-NB03TLT128922)

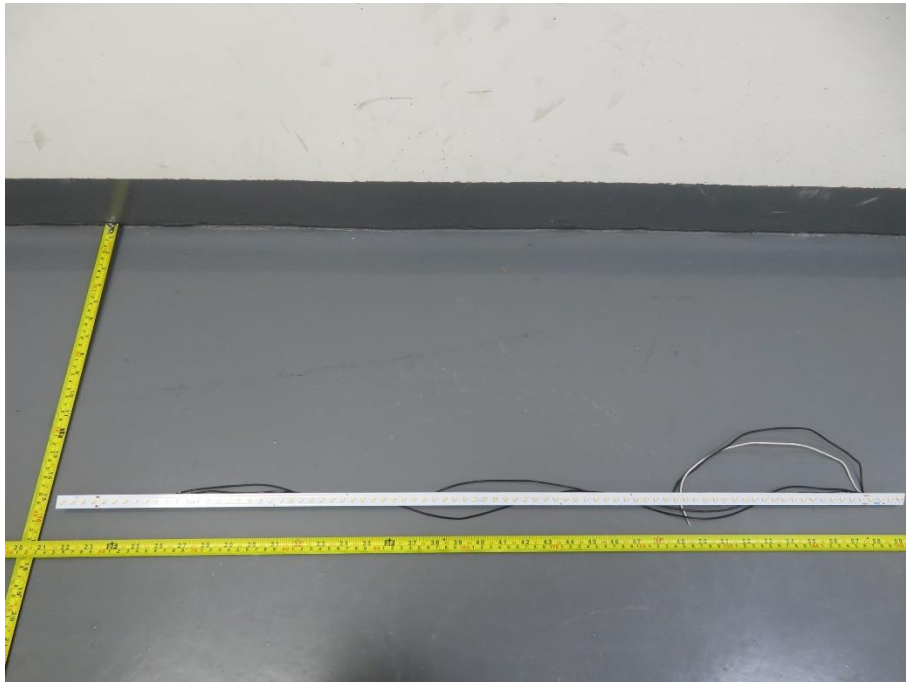


Fig. 3(Model name: GLV71RW4151-50-NB03TLT128927)

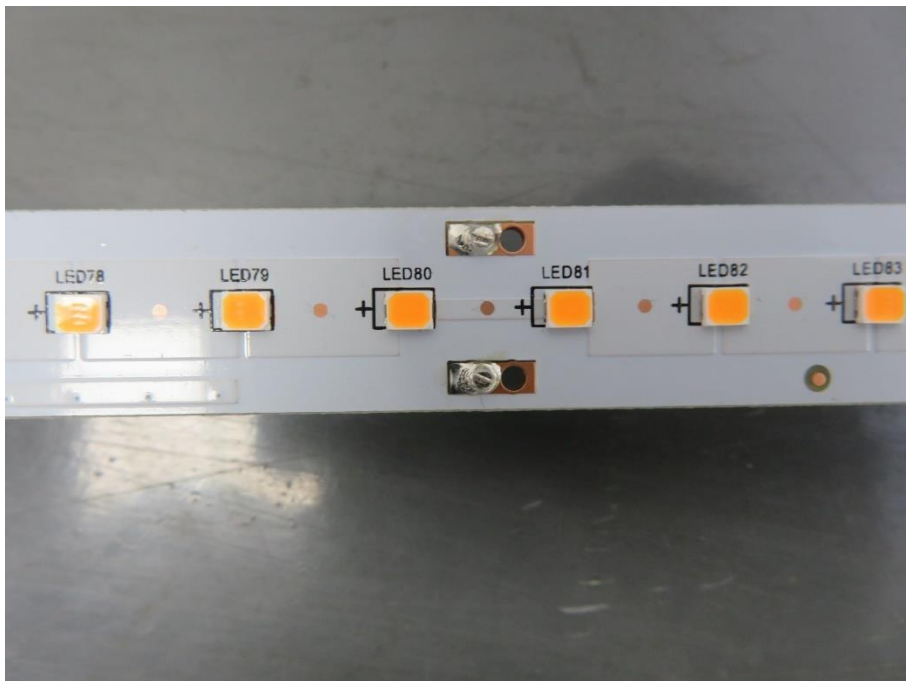


Fig. 4(Model name: GLV71RW4151-50-NB03TLT128927)

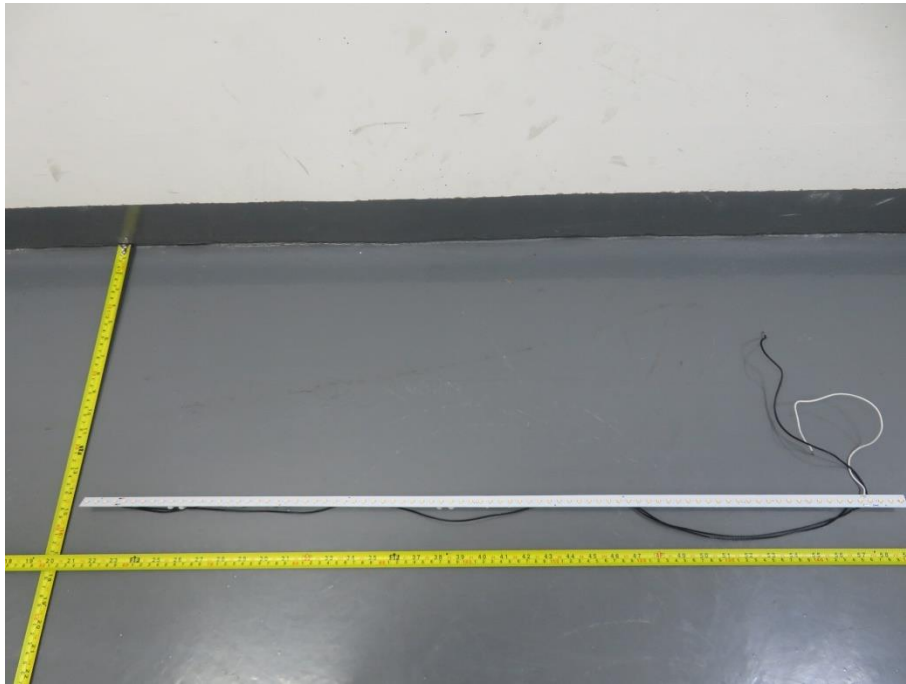


Fig. 5(Model name: GLV71RW4151-50-NB03TLT128930)

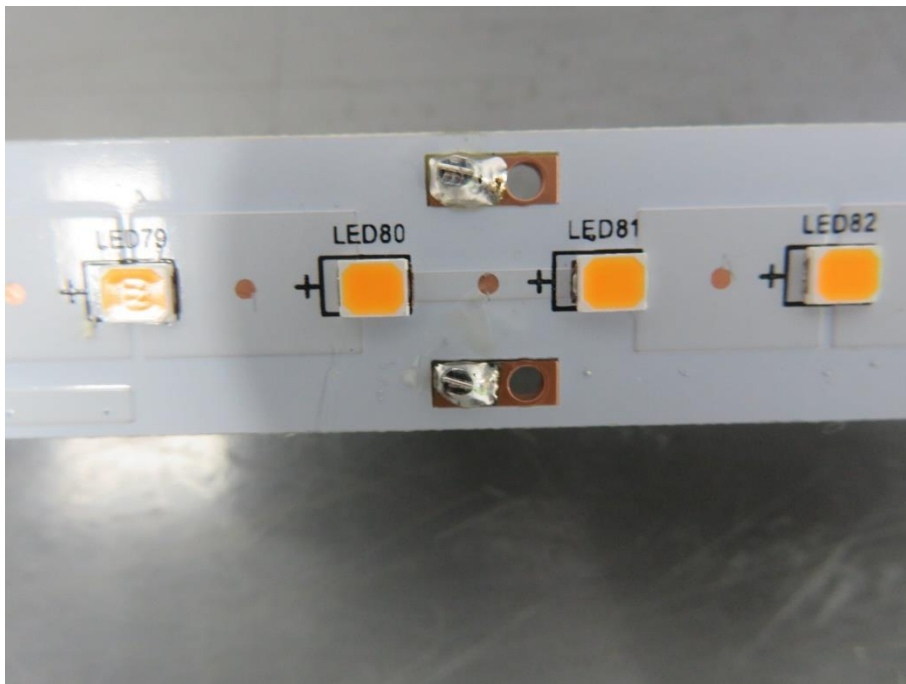


Fig. 6(Model name: GLV71RW4151-50-NB03TLT128930)

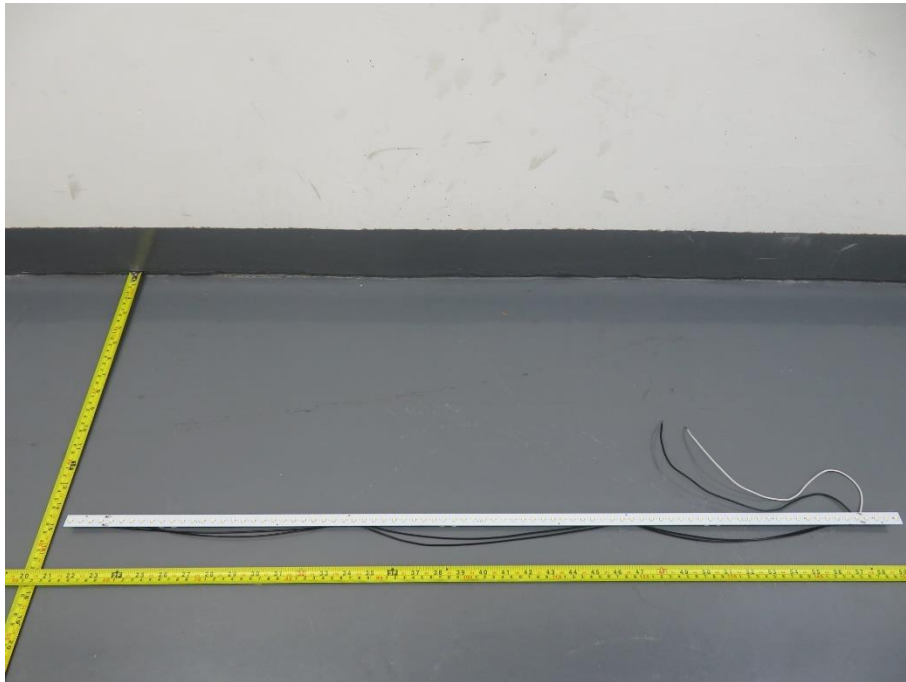


Fig. 7(Model name: GLV71RW4151-50-NB03TLT128940)



Fig. 8(Model name: GLV71RW4151-50-NB03TLT128940)

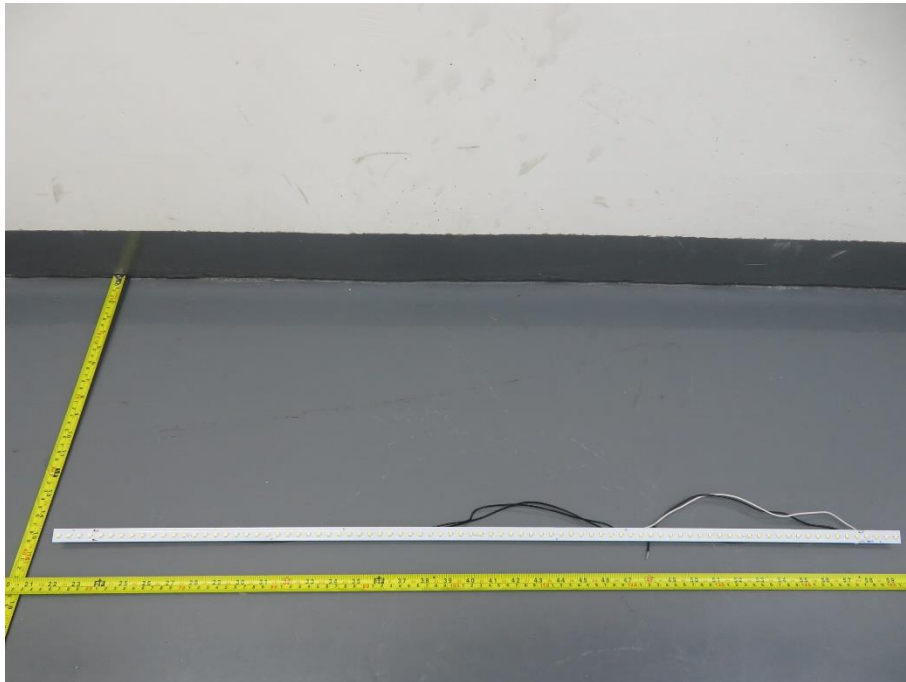


Fig. 9(Model name: GLV71RW4151-50-NB03TLT128840)

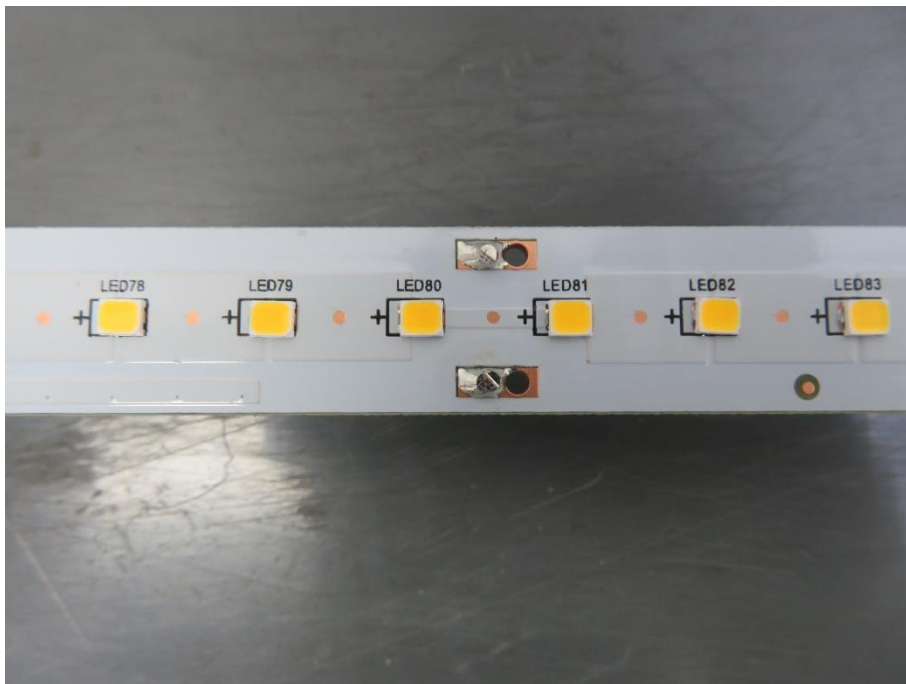


Fig. 10(Model name: GLV71RW4151-50-NB03TLT128840)

-- End of Report --