

FCC TEST REPORT  
For

Shenzhen Jibang Technology Co., Ltd.

Folding in-line mobile power supply

Test Model: D-03

Additional Model No.: YC510

Prepared for	: Shenzhen Jibang Technology Co., Ltd.
Address	: 3rd Floor, Building 2, No. 156, Huawang Road, Langkou Community, Dalang Sub-district, Longhua District, Shenzhen City
Prepared by	: Shenzhen AOCE Electronic Technology Service Co., Ltd.
Address	: Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
Tel	: (+86)755-85277785
Fax	: (+86)755-23705230
Web	: www.aoc-cert.com
Mail	: postmaster@aoc-cert.com
Date of receipt of test sample	: May 30, 2025
Number of tested samples	: 1
Serial number	: Prototype
Date of Test	: May 30, 2025 - June 11, 2025
Date of Report	: June 11, 2025

**FCC TEST REPORT****FCC 47 CFR Part 15 Subpart B, Class B(SDoC), ANSI C63.4 -2014****Report Reference No. ....:** AOC250611101F

Date Of Issue.....: June 11, 2025

**Testing Laboratory Name.....:** Shenzhen AOCE Electronic Technology Service Co., Ltd.

Address.....: Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China

Testing Location/ Procedure.....: Full application of Harmonised standards ■  
Partial application of Harmonised standards □  
Other standard testing method □**Applicant's Name.....:** Shenzhen Jibang Technology Co., Ltd.

Address.....: 3rd Floor, Building 2, No. 156, Huawang Road, Langkou Community, Dalang Sub-district, Longhua District, Shenzhen City

**Test Specification:**Standard.....: FCC 47 CFR Part 15 Subpart B, Class B(SDoC),  
ANSI C63.4 -2014

Test Report Form No.....: AOCEMC-1.0

TRF Originator.....: Shenzhen AOCE Electronic Technology Service Co., Ltd.

Master TRF.....: Dated 2011-03

**Shenzhen AOCE Electronic Technology Service Co., Ltd.All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen AOCE Electronic Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen AOCE Electronic Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description.....:** Folding in-line mobile power supply

Trade Mark.....: YOGEE

Model/ Type Reference.....: D-03

Ratings.....: Input: AC 100V-240V, 50/60Hz, 2.4A , 12W  
Output: 5V/9V/12V, 3A/2.22A/1.67A, MAX.15W**Result .....** Pass**Compiled by:**

David Liu

**Supervised by:**

Kevin Huang

**Approved by:**

Jackson Fang

David Liu/ File administrators

Kevin Huang/ Technique principal

Jackson Fang/ Manager

**FCC -- TEST REPORT****Test Report No. : AOC250611101F**June 11, 2025

Date of issue

Type / Model..... : D-03

EUT..... : Folding in-line mobile power supply

**Applicant..... : Shenzhen Jibang Technology Co., Ltd.**Address..... : 3rd Floor, Building 2, No. 156, Huawang Road, Langkou  
Community, Dalang Sub-district, Longhua District,  
Shenzhen City

Telephone..... : /

Fax..... : /

**Manufacturer..... : Shenzhen Jibang Technology Co., Ltd.**Address..... : 3rd Floor, Building 2, No. 156, Huawang Road, Langkou  
..... Community, Dalang Sub-district, Longhua District,  
Shenzhen City

Telephone..... : /

Fax..... : /

**Factory..... : Shenzhen Jibang Technology Co., Ltd.**Address..... : 3rd Floor, Building 2, No. 156, Huawang Road, Langkou  
Community, Dalang Sub-district, Longhua District,  
Shenzhen City

Telephone..... : /

Fax..... : /

**Test Result** according to the standards on page 5: **Pass**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## TABLE OF CONTENT

Test Report Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>5</b>
1.1.Description of Standards and Results .....	5
<b>2. GENERAL INFORMATION .....</b>	<b>6</b>
2.1.Description of Device (EUT) .....	6
2.2.Description of Support Device .....	6
2.3.Description of Test Facility .....	6
2.4.Statement of the Measurement Uncertainty .....	6
2.5.Measurement Uncertainty .....	7
<b>3. TEST RESULTS .....</b>	<b>8</b>
3.1.POWER LINE CONDUCTED EMISSION MEASUREMENT .....	8
3.2.Radiated emission Measurement .....	11
<b>5. PHOTOGRAPH .....</b>	<b>14</b>
<b>5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b>	<b>15</b>

1. SUMMARY OF STANDARDS AND RESULTS

1.1.Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC 47 CFR Part 15 Subpart B, Class B(SDoC), ANSI C63.4 -2014	Class B	PASS
Radiated disturbance	FCC 47 CFR Part 15 Subpart B, Class B(SDoC), ANSI C63.4 -2014	Class B	PASS
N/A is an abbreviation for Not Applicable.			

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT : Folding in-line mobile power supply

Model Number : D-03

Power Supply : Input: AC 100V-240V, 50/60Hz, 2.4A , 12W  
Output: 5V/9V/12, 3A/2.22A/1.67A, MAX.15W

### 2.2. Description of Support Device

Name	Manufacturers	M/N	S/N
---	---	---	---

### 2.3. Description of Test Facility

Site Description  
EMC Lab. : ---

### 2.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the AOC quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 2.5.Measurement Uncertainty

Test Item		Parameters	Expanded Uncertainty (Ulab)	Expanded Uncertainty (Ucisp)
Conducted Emission :		Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	2.63 dB 2.35 dB	3.8 dB 3.4 dB
Power Disturbance :		Level accuracy (30MHz to 300MHz)	±2.90dB	±4.5 dB
Radiated Emission :		Level accuracy (9kHz to 200MHz)	±3.68 dB	N/A
Radiated Emission		Level accuracy (200Hz to 1000MHz)	±3.48 dB	±5.3 dB
Radiated Emission		Level accuracy (above 1000MHz)	±3.90 dB	±5.2 dB

- (1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.
- (2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### 3. TEST RESULTS


#### 3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

##### 3.1.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	EZ	EZ-EMC	/	N/A	N/A
2	EMI Test Receiver	R&S	ESPI	101840	2025/04/24	2026/04/24
3	Artificial Mains	R&S	ENV216	101288	2025/04/24	2026/04/24
4	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-01-0032	2025/04/24	2026/04/24
5	Impedance Stabilization Network	TESEQ	ISN T800	45130	2025/04/24	2026/04/24

##### 3.1.2. Block Diagram of Test Setup

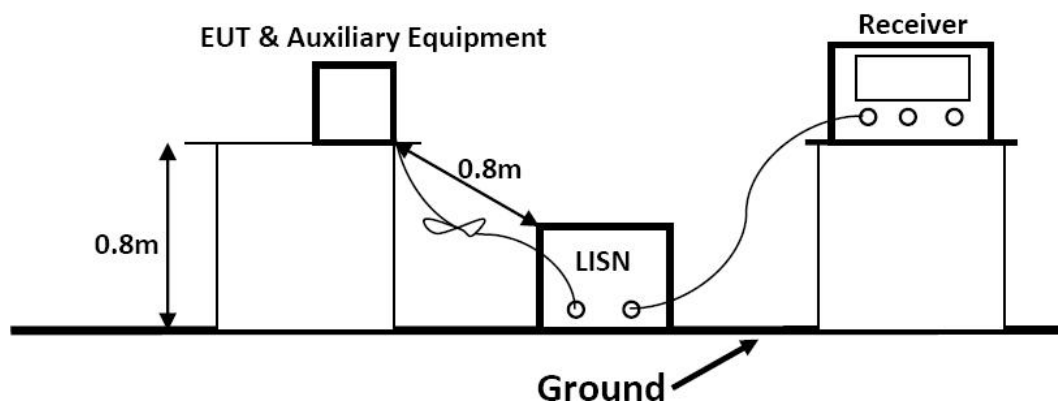

##### 3.1.3. Test Standard

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)			Limit (dB V)	
			Quasi-peak Level	Average Level
0.15	~	0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50	~	5.00	56.0	46.0
5.00	~	30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.



#### 3.1.4. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

#### 3.1.5. Operating Condition of EUT

3.1.5.1. Setup the EUT as shown on Section

3.1.5.2. Turn on the power of all equipments.

3.1.5.3. Let the EUT work in measuring Working and measure it.

#### 3.1.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.

The frequency range from 150kHz to 30MHz is investigated


#### 3.1.7. Test Results

**PASS.**

The test result please refer to the next page.

<b>Model No.</b>	D-03	<b>Test Date</b>	June 11, 2025
<b>Environmental Conditions</b>	24°C/ 56% RH	<b>Test Mode</b>	Working
<b>Pol</b>	Line	<b>Detector Function</b>	Quasi-peak
<b>Test Engineer</b>	Andy	<b>Test Voltage</b>	AC 125V

Test Graph

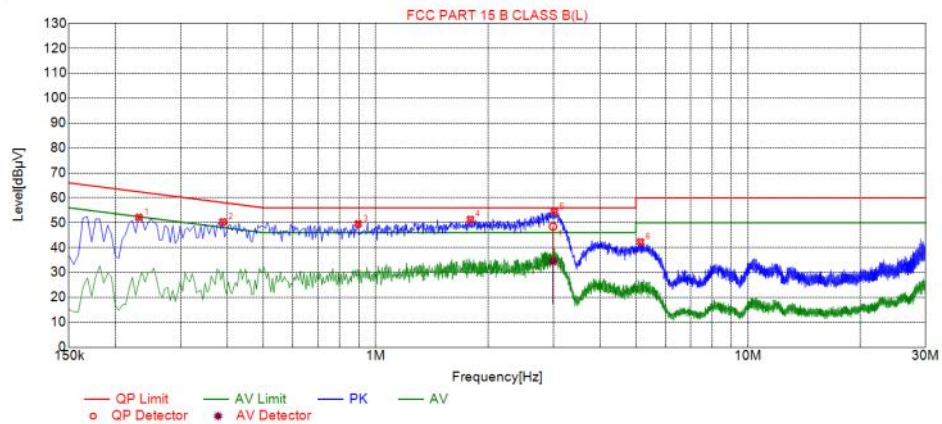


Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.2310	52.16	19.83	62.41	10.25	32.33	PK	L
2	0.3885	50.33	19.84	58.10	7.77	30.49	PK	L
3	0.8970	49.52	19.73	56.00	6.48	29.79	PK	L
4	1.7970	51.33	20.08	56.00	4.67	31.25	PK	L
5	3.0210	54.40	20.27	56.00	1.60	34.13	PK	L
6	5.1450	42.28	20.40	60.00	17.72	21.88	PK	L

<b>Model No.</b>	D-03	<b>Test Date</b>	June 11, 2025
<b>Environmental Conditions</b>	24°C/ 56% RH	<b>Test Mode</b>	Working
<b>Pol</b>	Line	<b>Detector Function</b>	Quasi-peak
<b>Test Engineer</b>	Andy	<b>Test Voltage</b>	AC 125V

Test Graph

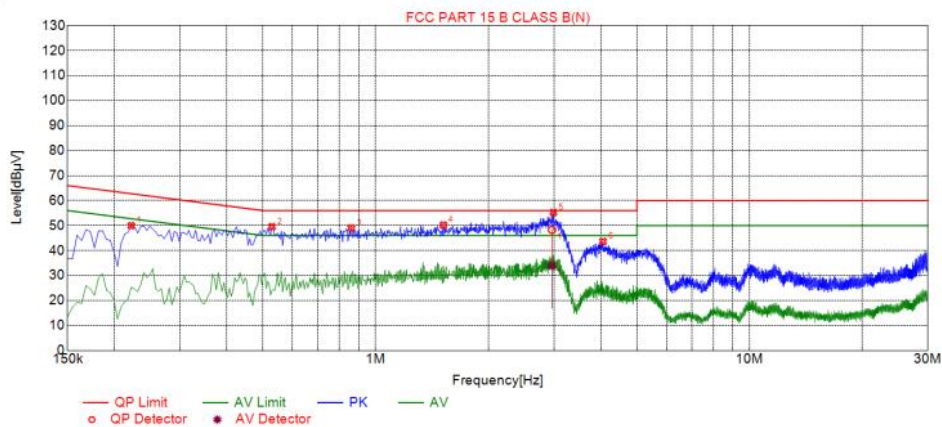

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.2220	49.94	19.65	62.74	12.80	30.29	PK	N
2	0.5280	49.52	19.74	56.00	6.48	29.78	PK	N
3	0.8610	49.00	19.76	56.00	7.00	29.24	PK	N
4	1.5180	50.18	19.86	56.00	5.82	30.32	PK	N
5	2.9895	55.22	20.07	56.00	0.78	35.15	PK	N
6	4.0560	43.61	20.16	56.00	12.39	23.45	PK	N



### 3.2. Radiated emission Measurement

#### 3.2.1 Test Equipment

The following test equipments are used during the radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	EZ	EZ-EMC	/	N/A	N/A
2	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2025/04/24	2026/04/24
3	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2025/04/24	2026/04/24
4	EMI Test Receiver	R&S	ESR 7	101181	2025/04/24	2026/04/24
5	Broadband Preamplifier	/	BP-01M18G	P190501	2025/04/24	2026/04/24

#### 3.2.2. Block Diagram of Test Setup

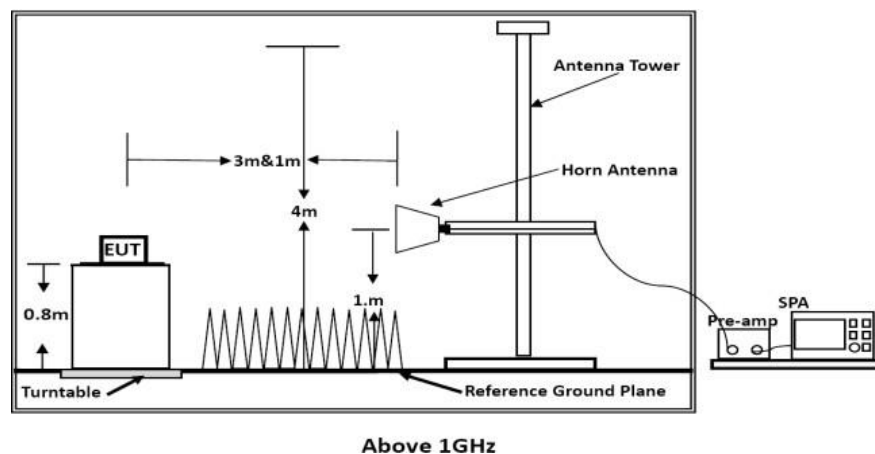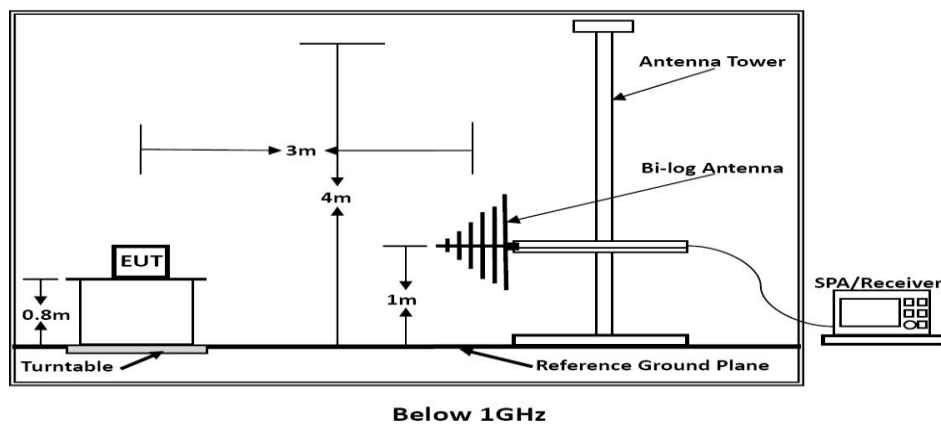

#### 3.2.3. Radiated Emission Limit (Class B)

## Limits for Radiated Disturbance Below 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		V/ m	dB( V)/ m
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54

Remark: (1) Emission level (dB)  $V = 20 \log$  Emission level V/m  
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## Limits for Radiated Emission Above 1GHz

Frequency (MHz)	Distance (Meters)	Peak Limit (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)
Above 1000	3	74	54

\*\*\*Note: The lower limit applies at the transition frequency.

## 3.2.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 3.2.5. Operating Condition of EUT

1.1.1.1. Setup the EUT as shown in Section 3.2.2.

3.2.5.2. Let the EUT work in test Mode 1 and measure it.

## 3.2.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.

The bandwidth of the EMI test receiver is set at 120kHz, 300kHz.

The frequency range from 30MHz to 1000MHz is checked.

## 3.2.7. Radiated Emission Noise Measurement Result


PASS.

The scanning waveforms please refer to the next page.

Model No.	D-03	Test Date	June 11, 2025
Environmental Conditions	24°C/ 56% RH	Test Mode	ON
Pol	Vertical	Detector Function	Quasi-peak
Test Engineer	Andy	Distance	3m

Charging and discharging mode simultaneously


Test Graph

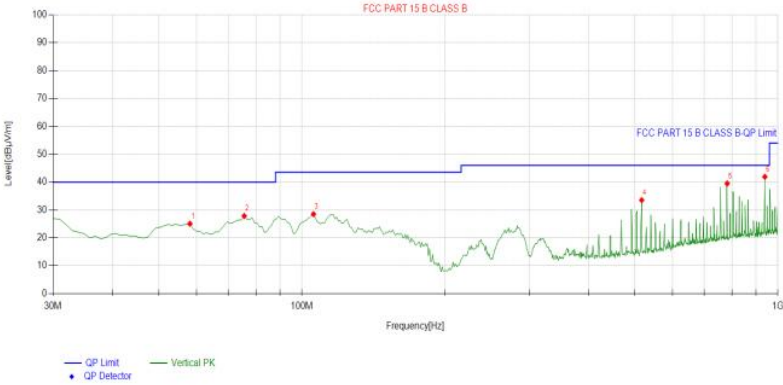

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	58.158158	-18.07	43.14	25.07	40.00	14.93	100	93	Vertical
2	75.635636	-20.45	48.31	27.86	40.00	12.14	100	22	Vertical
3	105.73573	-20.85	49.37	28.52	43.50	14.98	100	29	Vertical
4	517.42742	-12.84	46.37	33.53	46.00	12.47	100	95	Vertical
5	782.50250	-7.95	47.45	39.50	46.00	6.50	100	102	Vertical
6	938.82882	-6.17	48.08	41.91	46.00	4.09	100	93	Vertical

Discharge mode

Test Graph

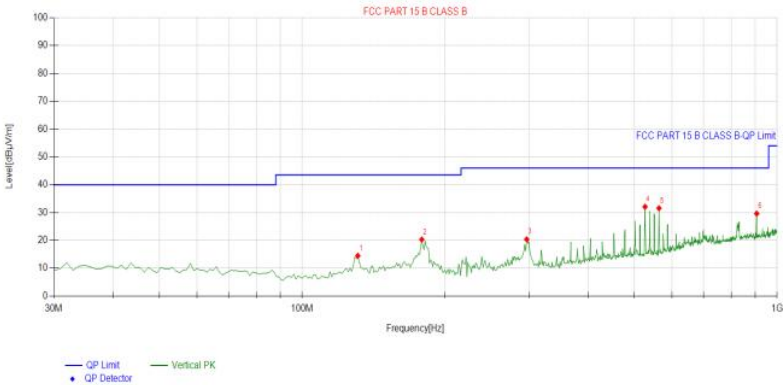


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	130.98098	-18.44	32.91	14.47	43.50	29.03	100	265	Vertical
2	178.55855	-18.85	39.17	20.32	43.50	23.18	100	9	Vertical
3	297.01701	-17.55	37.94	20.39	46.00	25.61	100	43	Vertical
4	527.13713	-12.82	44.91	32.09	46.00	13.91	100	221	Vertical
5	564.03403	-12.74	44.32	31.58	46.00	14.42	100	235	Vertical
6	905.81581	-6.85	36.48	29.63	46.00	16.37	100	122	Vertical

<b>Model No.</b>	D-03	<b>Test Date</b>	June 11, 2025
<b>Environmental Conditions</b>	24°C/ 56% RH	<b>Test Mode</b>	ON
<b>Pol</b>	Horizontal	<b>Detector Function</b>	Quasi-peak
<b>Test Engineer</b>	Andy	<b>Distance</b>	3m

## Charging and discharging mode simultaneously

Test Graph

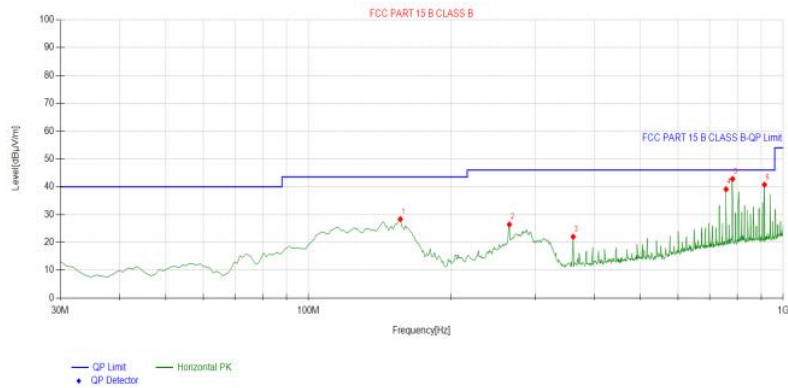


Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	156.22622	-16.96	45.33	28.37	43.50	15.13	100	18	Horizontal
2	264.97497	-18.54	44.99	26.45	46.00	19.55	100	35	Horizontal
3	361.10110	-15.94	37.97	22.03	46.00	23.97	100	24	Horizontal
4	758.22822	-8.41	47.50	39.09	46.00	6.91	100	112	Horizontal
5	782.50250	-7.95	50.75	42.80	46.00	3.20	100	115	Horizontal
6	913.58358	-6.59	47.33	40.74	46.00	5.26	100	16	Horizontal

## Discharge mode

Test Graph

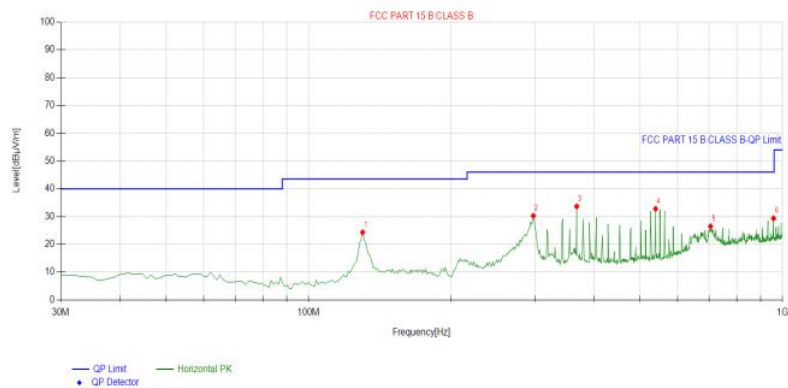

Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	130.01001	-18.43	42.77	24.34	43.50	19.16	100	11	Horizontal
2	297.98798	-17.53	47.81	30.28	46.00	15.72	100	249	Horizontal
3	367.89789	-15.88	49.54	33.66	46.00	12.34	100	266	Horizontal
4	539.75976	-12.82	45.62	32.80	46.00	13.20	100	197	Horizontal
5	704.82482	-9.23	35.73	26.50	46.00	19.50	100	274	Horizontal
6	957.27727	-5.90	35.27	29.37	46.00	16.63	100	141	Horizontal



## 4. PHOTOGRAPH



Fig.1

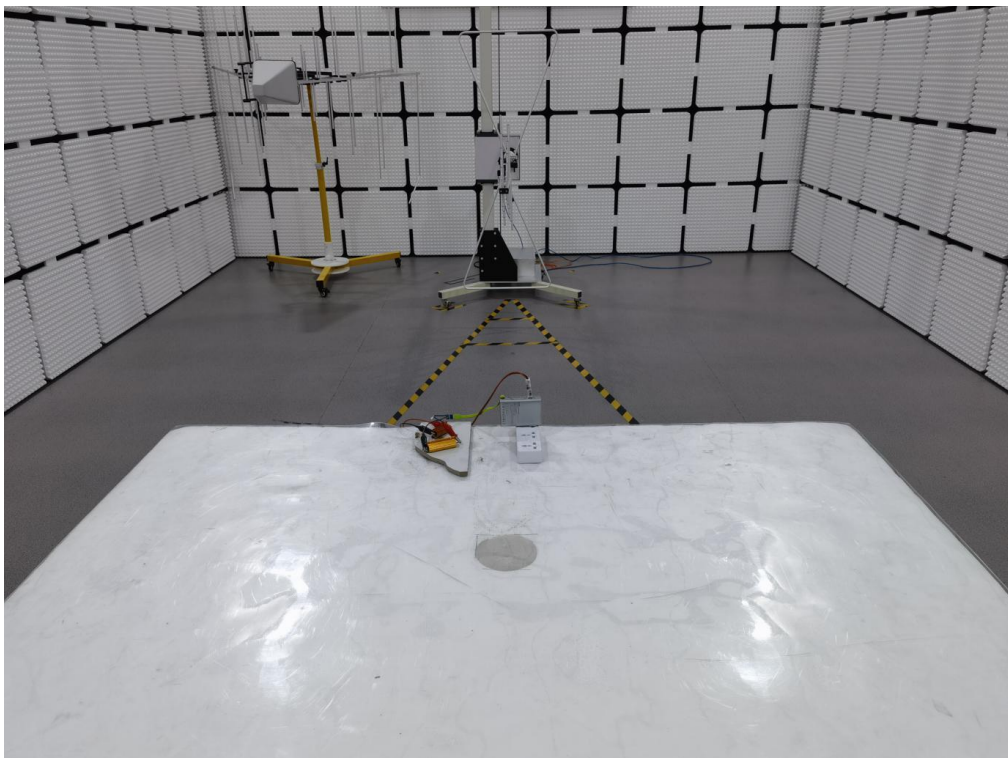


Fig.2

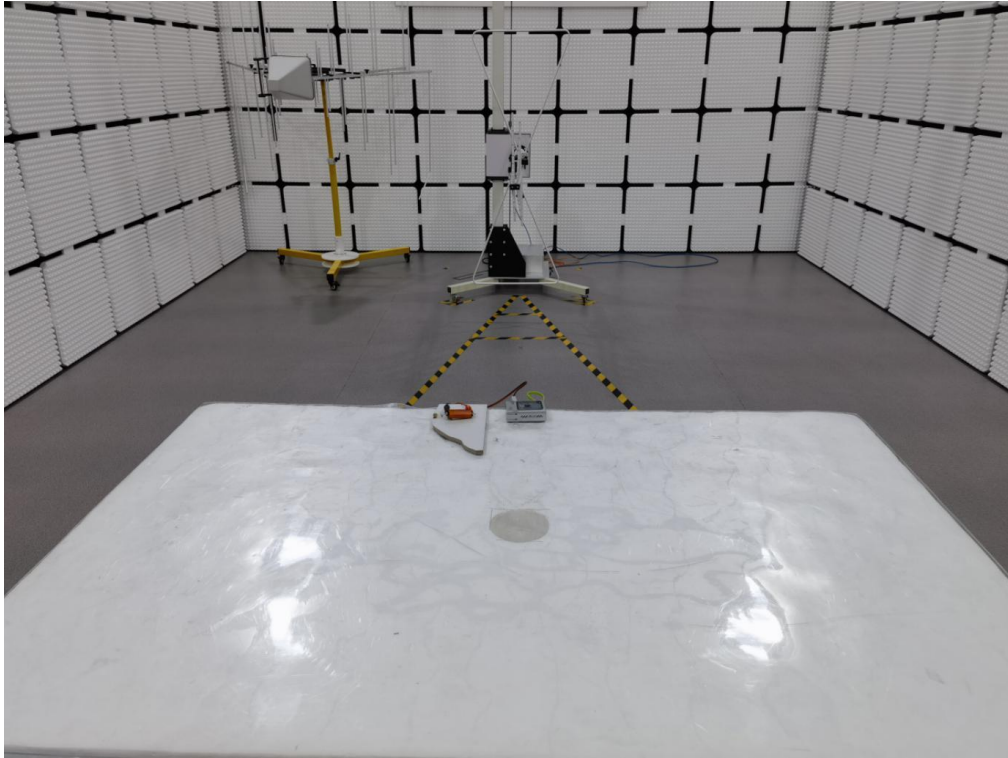


Fig.3



## 5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT



Fig.1



Fig.2





Fig.3



Fig.4

-----THE END OF REPORT-----