



**TEST REPORT**  
**IEC 60335-2-21**  
**Safety of household and similar electrical appliances**  
**Part 2: Particular requirements for water heaters**

**Report Number.....:** AOC250707001S

**Date of issue.....:** 2025-07-10

**Total number of pages.....:** 166 pages

**Name of Testing Laboratory preparing the Report.....:** Shenzhen AOCE Electronic Technology Service Co., Ltd  
Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China

**Applicant's name.....:** Guangdong Well-born Electric Appliance Co., Ltd.

**Address.....:** No. 15 HuaTian Road, South First Road, Ronggui, Shunde, Foshan, Guangdong

**Test specification:**

**Standard.....:** ☒ IEC 60335-2-21:2022 used in conjunction with IEC 60335-1:2020  
☒ European Group Differences and National Differences

**Test procedure.....:** Type testing

**Non-standard test method.....:** N/A

**TRF template used.....:** IECEE OD-2020-F1:2022, Ed.1.5

**Test Report Form No.....:** IEC60335\_2\_21O

**Test Report Form(s) Originator.....:** LCIE

**Master TRF.....:** Dated 2023-01-27

**Copyright © 2023 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

**This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

**General disclaimer:**

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the Testing Laboratory, responsible for this Test Report.

<b>Test item description..... :</b>	Electric water heater	
<b>Trademark(s)..... :</b>	Well-born	
<b>Manufacturer..... :</b>	Guangdong Well-born Electric Appliance Co., Ltd. No. 15 HuaTian Road, South First Road,Ronggui,Shunde, Foshan,Guangdong	
<b>Model/Type reference..... :</b>	1500W: NRJ30VLA13, NRJ50VLA13, NRJ80VLA13,NRJ100VLA13 1800 W: NDT18E30-1, NDT18E50-1, NDT18E80-1, NDT18E100-1, NDT18E30-2, NDT18E50-2, NDT18E80-2, NDT18E1002 2000 W: NDT20E30-1, NDT20E50-1, NDT20E80-1, NDT20E100-1, NDT20E30-2, NDT20E50-2, NDT20E80-2, NDT20E100-2, NDT20E30-3, NDT20E50-3, NDT20E80-3, NDT20E100-3, ODT20E30-4, ODT20E50-4, ODT20E80-4, ODT20E100-4 FVM30-1, FVM50-1	
<b>Ratings..... :</b>	220-240 V~, 50/60 Hz, Class I, IP X4	
<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input checked="" type="checkbox"/>	<b>Testing Laboratory:</b>	Shenzhen AOCE Electronic Technology Service Co., Ltd
	<b>Testing location/ address..... :</b>	Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
	<b>Tested by (name, function, signature)..... :</b>	ZhiCong Xian Technology Engineer <i>ZhiCong Xian</i>
	<b>Approved by (name, function, signature)... :</b>	Robin Liu Technology Manger <i>Robin. Liu</i>
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 1:</b>	N/A
	<b>Testing location/ address..... :</b>	
	<b>Tested by (name, function, signature)..... :</b>	
	<b>Approved by (name, function, signature)... :</b>	
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 2:</b>	N/A
	<b>Testing location/ address..... :</b>	
	<b>Tested by (name + signature)..... :</b>	
	<b>Witnessed by (name, function, signature).. :</b>	
	<b>Approved by (name, function, signature)... :</b>	
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 3:</b>	N/A

<input type="checkbox"/>	<b>Testing procedure: CTF Stage 4:</b>	N/A	
<b>Testing location/ address..... :</b>			
<b>Tested by (name, function, signature)..... :</b>			
<b>Witnessed by (name, function, signature).. :</b>			
<b>Approved by (name, function, signature)... :</b>			
<b>Supervised by (name, function, signature) :</b>			

**List of Attachments (including a total number of pages in each attachment):****Attachment No.1:** European Group Differences and National Differences.**Attachment No.2:** Photo document.**Summary of testing:****Tests performed (name of test, test clause and date test performed):**

All tests were performed on model NDT20E100-1

- EN IEC 60335-1:2023+A11:2023

- EN 60335-2-21:2021+A1:2021

- EN 62233:2008

**Testing location: (CBTL, SPTL, CTF, Subcontractor)**

Shenzhen AOCE Electronic Technology Service Co., Ltd

Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China

**Summary of compliance with National Differences (List of countries addressed):**

☒ **The product fulfils the requirements of EN IEC 60335-1:2023+A11:2023**  
**& EN 60335-2-21:2021+A1:2021**

**Use of uncertainty of measurement for decisions on conformity (decision rule) :**

☒ No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

☐ Other: ... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

**Information on uncertainty of measurement:**

The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or

customer.

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

### Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

#### ELECTRIC STORAGE WATER HEATER

MODEL	NDT18E30-1
Rated capacity	30L
Rated power	1800W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT18E30-1

#### ELECTRIC STORAGE WATER HEATER

MODEL	NDT18E50-1
Rated capacity	50L
Rated power	1800W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT18E50-1

#### ELECTRIC STORAGE WATER HEATER

MODEL	NDT18E80-1
Rated capacity	80L
Rated power	1800W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT18E80-1

#### ELECTRIC STORAGE WATER HEATER

MODEL	NDT18E100-1
Rated capacity	100L
Rated power	1800W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT18E100-1

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT20E30-1
Rated capacity	30L
Rated power	2000W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
4. Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT20E30-1

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT20E50-1
Rated capacity	50L
Rated power	2000W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
4. Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT20E50-1

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT20E80-1
Rated capacity	80L
Rated power	2000W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
4. Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT20E80-1

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT20E100-1
Rated capacity	100L
Rated power	2000W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
4. Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT20E100-1



**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT18E30-2
Rated capacity	30L
Rated power	1800W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT18E30-2

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT18E50-2
Rated capacity	50L
Rated power	1800W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT18E50-2

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT18E80-2
Rated capacity	80L
Rated power	1800W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT18E80-2

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT18E100-2
Rated capacity	100L
Rated power	1800W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT18E100-2

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT20E30-2
Rated capacity	30L
Rated power	2000W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT20E30-2

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT20E50-2
Rated capacity	50L
Rated power	2000W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT20E50-2

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT20E80-2
Rated capacity	80L
Rated power	2000W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT20E80-2

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT20E100-2
Rated capacity	100L
Rated power	2000W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT20E100-2

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT20E30-3
Rated capacity	30L
Rated power	2000W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT20E30-3

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT20E50-3
Rated capacity	50L
Rated power	2000W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT20E50-3

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT20E80-3
Rated capacity	80L
Rated power	2000W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT20E80-3

**ELECTRIC STORAGE WATER HEATER**

MODEL	NDT20E100-3
Rated capacity	100L
Rated power	2000W
Rated voltage	220-240V
Rated frequency	50/60Hz
Rated pressure	0.8MPa
IP code	IPX4

- 1.Fill heater tank with water before operation.
- 2.Do not operate during water interruption.
- 3.Do not block pressure relief valve outlet. Drainage pipe should be well ventilated.
- 4.Always connect heater ground wire to earthing source.
- 5.Pressure relief vale shall be fitted in the installation.
- 6.Water storage heater shall not be operated without a pressure relief valve.

NDT20E100-3



<b>Test item particulars..... :</b>	
<b>Classification of installation and use..... :</b>	Fixed appliance and used indoor only
<b>Supply Connection..... :</b>	Supply cord with plug
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object..... :	N/A
- test object does meet the requirement..... :	P (Pass)
- test object does not meet the requirement..... :	F (Fail)
<b>Testing..... :</b>	
<b>Date of receipt of test item..... :</b>	2025-06-23
<b>Date (s) of performance of tests..... :</b>	2025-06-23 to 2025-07-10
<b>General remarks:</b>	
<p>"(See Enclosure #)" refers to additional information appended to the report.          "(See appended table)" refers to a table appended to the report.</p> <p><b>Note: EN Group Differences together with National Differences and Special National Conditions, if any, are in the Appendix to the main body of this TRF.</b></p> <p><b>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</b></p> <p><i>This report was based on the original report AOC250225006S, only following items are revised, when this report issued, the original report will be withdraw:</i></p> <ol style="list-style-type: none"> <li>1. change company name, Change from Guangdg to Guangdong</li> <li>2. add product model</li> <li>3. add product photo</li> </ol>	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC60335-1:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided..... :	<input type="checkbox"/> <b>Yes</b> <input checked="" type="checkbox"/> <b>Not applicable</b>
<b>When differences exist; they shall be identified in the General product information section.</b>	
<b>Name and address of factory (ies)..... :</b>	Guangdong Well-born Electric Appliance Co., Ltd. No. 15 HuaTian Road, South First Road, Ronggui, Shunde, Foshan, Guangdong, China

**General product information and other remarks:**

All models have the same as electrical and mechanical structure except the power, volume & model, if no special describe, all tests were performed on model NDT20E100-1 .

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
<b>5</b>	<b>GENERAL CONDITIONS FOR THE TESTS</b>		-
	Tests performed according to clause 5, e.g. nature of supply, sequence of testing, etc.		P
<b>6</b>	<b>CLASSIFICATION</b>		-
6.1	Protection against electric shock: Class 0, 0I, I, II, III.....:	Class I	P
	For a class III construction with a detachable power supply part the appliance is classified according to the detachable power supply part		N/A
	Water heaters shall be class I, class II or class III (IEC 60335-2-21)	Class I	P
6.2	Protection against harmful ingress of water		P
	Water heaters for installation outdoors shall be at least IPX4. Other water heaters shall be at least IPX1; (IEC 60335-2-21)		P
<b>7</b>	<b>MARKING AND INSTRUCTIONS</b>		-
7.1	Rated voltage or voltage range (V).....:	220-240	P
	Symbol for nature of supply, or.....:	~	P
	Rated frequency (Hz).....:	50/60 Hz	P
	Rated power input (W), or.....:	2000 W	P
	Rated current (A).....:		N/A
	Manufacturer's or responsible vendor's name, trademark or identification mark.....:	See page 5 of copy of marking plate	P
	Model or type reference.....:	See page 5 of copy of marking plate	P
	Symbol IEC 60417-5172, for class II appliances		N/A
	IP number, other than IPX0.....:	IP X4	P
	Symbol IEC 60417-5180, for class III appliances, unless		N/A
	the appliance is operated by batteries only, or		N/A
	the appliance is powered by rechargeable batteries recharged in the appliance		N/A
	Appliance outlets accessible to the user and socket-outlets accessible to the user:		N/A
	- that are incorporated in appliances connected to the supply mains, and		N/A
	- that operate at rated voltage		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	marked with their outlet load (W or A).....:		N/A
	Appliances intended to be supplied from a detachable power supply part to recharge the battery:		N/A
	- symbol ISO 7000-0790		N/A
	- symbol IEC 60417-6181		N/A
	- model or type reference of the detachable power supply part, or.....:		N/A
	- the substance of the following:		N/A
	Use only with <model or type reference> supply unit		N/A
	Symbol IEC 60417-5018, for class II and class III appliances incorporating a functional earth		N/A
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N/A
	Appliances, other than cistern-type water heaters, shall be marked with the rated pressure in pascals (bars) (IEC 60335-2-21)		P
	Rated capacity in litres (IEC 60335-2-21)	100 L	P
	Closed water heater shall be marked with a statement that pressure relief device is to be fitted unless incorporated in the appliance (IEC 60335-2-21)		P
	Closed water heater having rated pressure less than 0.6 MPa and low pressure water heaters that a pressure reducing valve is to be fitted in the installation (IEC 60335-2-21)		N/A
	Open-outlet water heaters shall be marked, close to the outlet connection or on a tag attached to the appliance, with the substance of the following: (IEC 60335-2-21) WARNING: This outlet acts as a vent and must only be connected to a fitting recommended by the manufacturer. It must not be connected to a tap.		N/A
7.2	Warning for stationary appliances for multiple supply		N/A
	Warning placed in vicinity of terminal cover		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen		P
	Different rated values marked with the values separated by an oblique stroke		N/A
	This requirement also applies to appliances with provision for connection to both single-phase and multi-phase supplies		P
7.4	Appliances adjustable for different rated voltages or rated frequencies, the voltage or the frequency setting is clearly discernible		N/A
	If frequent changes in voltage or frequency setting are not required, the rated voltage or rated frequency to which the appliance is to be adjusted can be determined from a wiring diagram		N/A
	Wiring diagram may be on the inside of a cover that has to be removed to connect the supply conductors		N/A
	Wiring diagram not on a label loosely attached to the appliance		N/A
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		N/A
	the power input or current are related to the arithmetic mean value of the rated voltage range		P
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		N/A
7.6	Correct symbols used		P
	Symbol for nature of supply placed next to rated voltage		P
	Symbol for class II appliances placed unlikely to be confused with other marking		N/A
	Units of physical quantities and their symbols according to international standardized system		P
	Additional symbols give no rise to misunderstanding		P
	Symbols specified in IEC 60417 and ISO 7000 may be used		N/A
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply, unless		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	correct mode of connection is obvious		N/A
	For multi-phase appliances, correct mode of connection considered to be obvious if:		N/A
	- indicated by arrows pointing towards the terminals, or		N/A
	- marked in words		N/A
	Connection diagram may be the wiring diagram		N/A
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		N/A
	- marking of terminals exclusively for the neutral conductor (letter N)		N/A
	- marking of protective earthing terminals (symbol IEC 60417-5019)		N/A
	- marking of functional earthing terminals (symbol IEC 60417-5018)		N/A
	- marking not placed on removable parts		N/A
7.9	Marking or placing of switches which may cause a hazard		N/A
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means..... :		N/A
	This applies also to switches which are part of a control		N/A
	If figures are used, the off position indicated by the figure 0		N/A
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		N/A
	The figure 0 may be used on a digital programming keyboard		N/A
7.11	Indication for direction of adjustment of controls		P
7.12	Instructions for safe use provided in hard copy form		P
	Instructions may be marked on the appliance as long as they are visible in normal use		P
	Details concerning precautions during user maintenance		P
	The instructions the substance of the following:		P

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- this appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety		P
	- children should be supervised not to play with the appliance		P
	For a part of class III construction supplied from a detachable power supply part, the instructions state that the appliance is only to be used with the unit provided		N/A
	Instructions for class III appliances state that it must only be supplied at SELV, unless		N/A
	it is a battery-operated appliance, the battery being charged outside the appliance		N/A
	For appliances for altitudes exceeding 2 000 m, the maximum altitude is stated.....:		N/A
	The instructions for appliances incorporating a functional earth state that the appliance incorporates an earth connection for functional purposes		N/A
	The instructions for appliances intended to be connected to a supply for battery recharging state a warning to only use an external supply with the described specifications		N/A
	The instructions for appliances intended to be supplied from a detachable power supply part for battery recharging state the type reference of the supply part along with a warning to only use the unit provided with this appliance		N/A
	The instructions for appliances intended for use with batteries using metal-ion chemistries state the normal temperature range for battery charging		N/A
	Meaning of symbol for detachable power supply part explained, unless not used		N/A
	The instructions for close water heaters shall state the substance of the following (IEC 60335-2-21):		P
	the water may drip from the discharge pipe of the pressure-relief device and that this pipe must be left open to the atmosphere		P

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	the pressure-relief device is to be operated regularly to remove lime deposits and to verify that it is not blocked;		P
	how the water heater can be drained.		P
7.12.1	Sufficient details for installation supplied		P
	For an appliance intended to be permanently connected to the water mains and not connected by a hose-set, this is stated		N/A
	If different rated voltages or different rated frequencies are marked, the instructions state what action to be taken to adjust the appliance		N/A
	The installation instructions shall state the substance of the following (IEC 60335-2-21):		P
	-the type or characteristics of the pressure relief device, how to connect it, unless it is incorporated in the appliance		P
	-a discharge pipe connected to the pressure relief device installed downwards direction and in a frost-free environment		P
	-the type or characteristics of a pressure reducing valve and the installation details ( for appliances having a rated pressure less than 0,6 MPa)		N/A
	The instructions for close water heaters incorporating heat exchanger shall give details on the installation of control devices and the temperature settings that are necessary to prevent operation of the thermal cut-out caused by the heat from the exchanger (IEC 60335-2-21)		N/A
	The instructions for cistern-fed water heaters and low-pressure water heaters shall contain the substance of the following (IEC 60335-2-21): Warning : Do not connect any pressure-relief device to the vent pipe of this water heater		N/A
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions state that the fixed wiring must be protected		N/A
7.12.4	Instructions for built-in appliances:		N/A
	- dimensions of space		N/A
	- dimensions and position of supporting and fixing		N/A
	- minimum distances between parts and surrounding structure		N/A
	- minimum dimensions of ventilating openings and arrangement		N/A
	- connection to supply mains and interconnection of separate components		N/A
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N/A
	a switch complying with 24.3		N/A
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N/A
	Replacement cord instructions, type Y attachment		P
	Replacement cord instructions, type Z attachment		N/A
	Replacement cord set instructions, if required according to 22.58		N/A
7.12.6	Caution in the instructions for appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of the supply mains, if this cut-out is required to comply with the standard		N/A
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed		P
7.12.8	Instructions for appliances connected to the water mains:		P
	- max. inlet water pressure (Pa)..... :		P
	- min. inlet water pressure, if necessary (Pa)..... :		P
	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets		P
7.12.9	Instructions specified in 7.12 and from 7.12.1 to 7.12.8 are in hard copy form and appear together before any other instructions supplied with the appliance		P

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Alternatively, these instructions may be supplied with the appliance separately from any functional use booklet		P
	They may follow the description of the appliance that identifies parts, or follow the drawings/sketches common to the languages of the instructions		P
	They may follow the description of the appliance that identifies parts, or follow the drawings/sketches		P
	In addition, instructions are also available in an alternative format such as on a website or on request in a format such as a DVD.....:		P
7.13	Instructions and other texts in an official language		P
7.14	Markings clearly legible:		P
	Signal words WARNING, CAUTION, DANGER in uppercase having a height as specified.....:		P
	Uppercase letter of the text explaining the signal word not smaller than 1,6 mm.....:		P
	Moulded in, engraved, or stamped markings either raised above or have a depth below the surface of at least 0,25 mm, unless		N/A
	contrasting colours are used		P
	Markings checked by inspection, measurement and rubbing test as specified		P
	Markings clearly durable, and on containers that are likely to be cleaned frequently they are not by means of paint or enamel, other than vitreous enamel		P
7.15	Markings specified in 7.1 to 7.5 on a main part		P
	Marking clearly discernible from the outside, if necessary after removal of a cover		N/A
	For portable appliances, cover can be removed or opened without a tool		N/A
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		N/A
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		P



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		N/A
	The symbol IEC 60417-5018 placed next to the symbol IEC 60417-5172 or IEC 60417-5180		N/A
	Type reference of detachable power supply part placed next to symbol IEC 60417-6181		N/A
	Marking of outlet load close to appliance outlet or socket-outlet		N/A
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link		N/A
7.101	The water inlet and the water outlet shall be identified. (IEC 60335-2-21)		P
	This identification shall not be on detachable parts.		P
	If colours are used, blue shall be used for the inlet and red for the outlet.		P
	An alternative means of identification may be by means of arrows showing the direction of the water flow.		P
<b>8</b>	<b>PROTECTION AGAINST ACCESS TO LIVE PARTS</b>		-
8.1	Adequate protection against accidental contact with live parts		P
8.1.1	Requirement applies for all positions, detachable parts removed unless otherwise specified		P
	Use of test probe B of IEC 61032:		P
	- force not exceeding 1 N: no contact with live parts		P
	- force of 20 N: no contact with live parts		P
	- lamps behind a detachable cover not removed, if conditions met		N/A
	- protection against contact with live parts of the lamp cap during lamp insertion or removal		N/A
	Use of test probe 18 of IEC 61032 for non-commercial appliances and commercial appliances intended for public access:		P
	- force not exceeding 1 N: no contact with live parts		P
	- force of 10 N: no contact with live parts		P

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- appliance fully assembled as in normal use, no parts removed		P
	No contact with live parts protected by materials as specified		P
8.1.2	Use of test probe 13 of IEC 61032, with a force not exceeding 1 N, through openings in class 0 appliances and class II appliances/constructions: no contact with live parts		N/A
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		N/A
8.1.3	For appliances other than class II, use of test probe 41 of IEC 61032, with a force not exceeding 1 N: no contact with live parts of visible glowing heating elements or supporting parts		N/A
	For a single switching action obtained by a switching device, requirements as specified		N/A
	For appliances with a supply cord and without a switching device, the single switching action may be obtained by the withdrawal of the plug		P
8.1.4	Accessible part not considered live if:		N/A
	- safety extra-low AC voltage: peak value not exceeding 42,4 V		N/A
	- safety extra-low DC voltage: not exceeding 42,4 V		N/A
	- or separated from live parts by protective impedance		N/A
	If protective impedance: DC current not exceeding 2 mA, and		N/A
	AC peak value not exceeding 0,7 mA		N/A
	- for peak values over 42,4 V up to and including 450 V, capacitance not exceeding 0,1 $\mu$ F		N/A
	- for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 $\mu$ C		N/A
	- for peak values over 15 kV, the energy in the discharge not exceeding 350 mJ		N/A
8.1.5	Live parts protected at least by basic insulation before installation or assembly:		P
	- built-in appliances		N/A
	- fixed appliances		P
	- appliances delivered in separate units		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only		N/A
	Only possible to touch parts separated from live parts by double or reinforced insulation		N/A
8.3	For battery-operated appliances with a functional earth or supply connection, parts within a battery compartment only accessible if:		N/A
	- class I, 0I and II appliances: separated from live parts by double and reinforced insulation		N/A
	- class 0 appliances: separated from live parts by basic insulation		N/A
	- battery compartment of class III construction, and basic insulation in addition to supply at SELV, if limits in 8.1.4 exceeded		N/A
	The test probes are only applied to built-in appliances and fixed appliances after installation		N/A
<b>9</b>	<b>STARTING OF MOTOR-OPERATED APPLIANCES</b>		-
	Requirements and tests are specified in part 2 when necessary		N/A
<b>10</b>	<b>POWER INPUT AND CURRENT</b>		-
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in Table 1 :	(See appended table)	P
	If the power input varies throughout the operating cycle and its maximum value exceeds twice its arithmetic mean value occurring during a representative period, the power input is the maximum value that is exceeded for more than 10 % of the representative period if this value is greater than the arithmetic mean value,		N/A
	otherwise the power input is the arithmetic mean value		P
	In case of doubt, the power input of the motors may be measured separately		N/A
	In case of measurement during a representative period, duration of the representative period.....:		N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	the rated power input is related to the arithmetic mean value of the relevant range		P
	Appliance outlets accessible to the user and socket-outlets accessible to the user incorporated in appliances connected to the supply mains and operating at rated voltage are not loaded during test,		N/A
	however, their contribution to the power input is considered to be the marked outlet load per appliance outlet or socket-outlet		N/A
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in Table 2..... :	(See appended table)	N/A
	If the current varies throughout the operating cycle and its maximum value exceeds twice its arithmetic mean value occurring during a representative period, the current is the maximum value that is exceeded for more than 10 % of the representative period if this value is greater than the arithmetic mean value,		N/A
	otherwise the current is the arithmetic mean value		N/A
	In case of doubt, the current of the motors may be measured separately		N/A
	In case of measurement during a representative period, duration of the representative period.....:		N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated current is related to the arithmetic mean value of the relevant range		N/A
	Appliance outlets and socket-outlets accessible to the user incorporated in appliances connected to the supply mains and operating at rated voltage are not loaded during test,		N/A
	however, their contribution to the current is considered to be the marked outlet load per appliance outlet or socket-outlet		N/A
<b>11</b>	<b>HEATING</b>		-
11.1	No excessive temperatures in normal use		P
11.2	The appliance is held, placed or fixed in position as described.....:		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
11.3	Temperature rises, other than of windings, determined by thermocouples		P
	Temperature rises of windings determined by resistance method, unless		N/A
	the windings are non-uniform or it is difficult to make the necessary connections		N/A
	Where the external accessible surfaces are suitably flat and access permits, then the test probe of Figure 103 may be used to measure the temperature rises of external accessible surfaces specified in Table 101. (IEC 60335-2-21)		N/A
11.4	Heating appliances operated under normal operation at 1,15 times rated power input (W).....:		P
11.5	Motor-operated appliances operated under normal operation at most unfavourable voltage between 0,94 and 1,06 times rated voltage (V).....:		N/A
11.6	Combined appliances operated under normal operation at most unfavourable voltage between 0,94 and 1,06 times rated voltage (V).....:		N/A
11.7	The appliance is operated until steady conditions are established or until the thermostat interrupts the current for the first time after 16 h, whichever is shorter (IEC 60335-2-21)		P
11.8	Temperature rises monitored continuously and not exceeding the values in Table 3 and Table 101..... (IEC 60335-2-21):	(See appended table)	P
	If the temperature rise of a motor winding exceeds the value of Table 3, or		N/A
	if there is doubt with regard to classification of insulation,		N/A
	tests of Annex C are carried out		N/A
	Sealing compound does not flow out		P
	Protective devices do not operate, except		P
	components in protective electronic circuits tested for the number of cycles specified in 24.1.4		N/A
<b>12</b>	<b>CHARGING OF METAL-ION BATTERIES</b>		-
	Charging a battery that uses metal-ion chemistry does not cause any cell to exceed its operating region for charging		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Fully discharged battery is charged with the charging system indicated in the instructions at an ambient temperature of 20 °C ± 5 °C		N/A
	Test repeated at:		N/A
	- minimum ambient temperature, if specified to be less than 10 °C by the manufacturer (°C).....:		N/A
	- at maximum ambient temperature, if specified to be greater than 40 °C by the manufacturer (°C)....:		N/A
	For all individual cells, the voltage, temperature and charging current are monitored..... :	(See appended table)	N/A
	For parallel configuration, analysis may be used to avoid measuring the individual branch currents,		N/A
	the test result not exceeding the specified operating region for charging		N/A
	Location of thermocouples for each cell temperature measurement on the outer surface, halfway along the longest dimension of the cell		N/A
	For each cell, the specified operating region for charging specified by the cell manufacturer is not exceeded at the temperature of the cell		N/A
	For batteries where cells are configured in series, the test is repeated with the charge in one battery deliberately imbalanced, the imbalance being introduced into a fully discharged battery by charging one cell to:		N/A
	- approximately 50 % of its full charge, or		N/A
	- less than 50 % of its full charge, if it can be demonstrated as specified that this would occur in normal operation		N/A
<b>13</b>	<b>LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE</b>		-
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1,15 times the rated power input (W).....:		P
	Motor-operated appliances and combined appliances supplied at 1,06 times the rated voltage (V).....:		N/A
	Protective impedance and radio interference filters disconnected before carrying out the tests		N/A
13.2	The leakage current is measured by means of the circuit described in Figure 4 of IEC 60990:2016		P

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	For class 0I appliances and class I appliances, except parts of class II construction, C may be replaced by a low impedance ammeter		P
	Leakage current measurements..... :	(See appended table)	P
13.3	The appliance is disconnected from the supply		P
	Electric strength tests according to Table 4..... :	(See appended table)	P
	No breakdown during the tests		P
<b>14</b>	<b>TRANSIENT OVERVOLTAGES</b>		-
	Appliances withstand the transient over-voltages to which they may be subjected		N/A
	Clearances having a value less than specified in Table 16 subjected to an impulse voltage test, the test voltage specified in Table 6..... :	(See appended table)	N/A
	No flashover during the test, unless		N/A
	of functional insulation if the appliance complies with clause 19 with the clearance short-circuited		N/A
<b>15</b>	<b>MOISTURE RESISTANCE</b>		-
15.1	Enclosure provides the degree of moisture protection according to classification of the appliance		P
	Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3		P
	No trace of water on insulation which can result in a reduction of clearances or creepage distances below values specified in clause 29		P
	No water in the enclosure of appliances and parts of appliances with pins for insertion into socket-outlets		N/A
15.1.1	Appliances, other than IPX0, subjected to tests as specified in IEC 60529:1989 including IEC 60529:1989/AMD1:1999 and IEC 60529:1989/AMD2:2013..... :		P
	Water valves containing live parts in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances		N/A
15.1.2	Hand-held appliances turned continuously through the most unfavourable positions during the test		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances with an automatic cord reel are tested according to 15.1.1 with the supply cord unreeled, coiled and reeled again as specified, and		N/A
	for fixed appliances mounted on the wall or ceiling, the cord is dropped from the minimum height as specified in the instructions before being coiled		P
	Built-in appliances installed according to the instructions		N/A
	Appliances placed or used on the floor or table placed on a horizontal unperforated support		N/A
	Appliances normally fixed to a wall are mounted on a wooden board		P
	Appliances and parts of appliances with integral pins for insertion into socket-outlets are held by the pins in the most unfavourable position without being mounted in a socket-outlet		N/A
	For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube		N/A
	For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of the oscillating tube, and		N/A
	for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube		N/A
	Wall-mounted appliances with the distance to the floor stated in the instructions are tested with a board placed accordingly under the appliance		N/A
	Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support, the pivot axis of the oscillating tube located at the level of the underside of the support, and		N/A
	for IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5 min		N/A
	Appliances with type X attachment fitted with a flexible cord as described, unless		N/A
	having a specially prepared cord		N/A
	Detachable parts removed and subjected to the relevant treatment with the main part, however		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	not removed if the instructions state that the part must be removed for user maintenance and a tool is needed		N/A
15.2	Spillage of liquid does not affect the electrical insulation		N/A
	Spillage solution comprising water containing approximately 1 % NaCl and 0,6 % rinsing agent		N/A
	The test is only applicable to cistern-type water heaters. (IEC 60335-2-21)		N/A
	Appliances with type X attachment fitted with a flexible cord as described, unless		N/A
	having a specially prepared cord		N/A
	Appliances incorporating an appliance inlet tested with or without a connector, whichever is most unfavourable		N/A
	Detachable parts are removed		N/A
	Overfilling test with additional amount of the solution, over a period of 1 min (I).....:		N/A
	Non-ionic rinsing agent complies with the specified properties		N/A
	The appliance withstands the electric strength test of 16.3		N/A
	No trace of water on insulation that can result in a reduction of clearances or creepage distances below values specified in clause 29		N/A
15.3	Appliances proof against humid conditions		P
	Checked by test Cab: Damp heat steady state in IEC 60068-2-78		N/A
	Cable entries, if any, left open		N/A
	If knock-outs provided, one of them opened		N/A
	Detachable parts removed and subjected, if necessary, to the humidity test with the main part		N/A
	Humidity test for 48 h in a humidity cabinet		P
	Reassembly of those parts that may have been removed		N/A
	The appliance withstands the tests of clause 16		P
<b>16</b>	<b>LEAKAGE CURRENT AND ELECTRIC STRENGTH</b>		<b>-</b>

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		N/A
	Tests carried out at room temperature and not connected to the supply		P
16.2	Single-phase appliances: test voltage 1,06 times rated voltage (V)..... :		P
	Three-phase appliances: test voltage 1,06 times rated voltage divided by $\sqrt{3}$ (V)..... :		N/A
	Leakage current measurements..... :	(See appended table)	P
	Limit values doubled if:		N/A
	- all controls have an off position in all poles, or		N/A
	- the appliance has no control other than a thermal cut-out, or		N/A
	- all thermostats, temperature limiters and energy regulators do not have an off position, or		N/A
	- the appliance has radio interference filters		N/A
	With the radio interference filters disconnected, the leakage current does not exceed limits specified.. :	(See appended table)	N/A
16.3	Electric strength tests according to Table 7..... :	(See appended table)	P
	Test voltage applied between the supply cord and inlet bushing and cord guard and cord anchorage as specified..... :	(See appended table)	P
	No breakdown during the tests		P
<b>17</b>	<b>OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS</b>		-
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use..... :	(See appended table)	N/A
	Appliance supplied with 1,06 or 0,94 times rated voltage under the most unfavourable short-circuit or overload likely to occur in normal use (V)..... :		N/A
	Basic insulation is not short-circuited		N/A
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in Table 3 by more than 15 K		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Temperature of the winding not exceeding the value specified in Table 8		N/A
	However, limits do not apply to fail-safe transformers complying with subclause 15.5 of IEC 61558-1:2017		N/A
<b>18</b>	<b>ENDURANCE</b>		-
	Requirements and tests can be specified in part 2		N/A
<b>19</b>	<b>ABNORMAL OPERATION</b>		-
19.1	The risk of fire, mechanical damage or electric shock under abnormal or careless operation obviated		P
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe..... :	(See appended table)	P
	For closed water heaters, low pressure water heaters and open-outlet water heaters: -compliance checked by 19.2, 19.3 and 19.4..... .....(IEC 60335-2-21)		N/A
	Or - 19.101 applies for appliances not liable to be emptied in normal use and having all following features: (IEC 60335-2-21) - an outer enclosure of metal or a water container of metal and an outer enclosure of non-metallic material; (see note 1) - non-combustible thermal insulation (see note 2) - a capacity exceeding 30 l - a rated power input not exceeding 6 kW (see notes 3 and 4)		P
	Appliances incorporating heating elements subjected to the tests of 19.2 and 19.3, and		N/A
	if the appliance also has a control that limits the temperature during clause 11 it is subjected to the test of 19.4, and		N/A
	if applicable, to the test of 19.5		N/A
	Appliances incorporating PTC heating elements are also subjected to the test of 19.6		N/A
	Appliances incorporating motors subjected to the tests of 19.7 to 19.10, as applicable		N/A
	Appliances incorporating electronic circuits subjected to the tests of 19.11 and 19.12, as applicable		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances incorporating contactors or relays subjected to the test of 19.14, being carried out before the tests of 19.11		N/A
	Appliances incorporating voltage selector switches subjected to the test of 19.15		N/A
	Appliances having a mains connection and replaceable batteries subjected to the test of 19.16		N/A
	Appliances incorporating rechargeable batteries that use metal-ion chemistries subjected to the test of 19.17		N/A
	Unless otherwise specified, the tests are continued until a non-self-resetting thermal cut-out operates, or		N/A
	until steady conditions are established		P
	If a heating element or an intentionally weak part becomes open-circuited, the relevant test is repeated on a second sample, and		N/A
	that same part on the second sample does also become permanently open-circuited in the second test,		N/A
	unless a non-self-resetting thermal cut-out operates or steady conditions are established		N/A
19.2	Test of appliances with heating elements with restricted heat dissipation; test voltage (V), power input of 0,85 times rated power input (W).....:		N/A
	Appliance operated empty with thermal control operating in clause 11 short-circuited..... .....(IEC 60335-2-21)		N/A
19.3	Test of 19.2 repeated; test voltage (V), power input of 1,24 times rated power input (W)..... :		N/A
19.4	Open-outlet water heaters: ..... (IEC 60335-2-21) -19.2 repeated with container filled with water min. 10mm above heater -1.15 times rated power input		N/A
19.5	Test of 19.4 repeated on class 0I and I appliances with tubular sheathed or embedded heating elements. No short-circuiting, but one end of the element connected to the sheath		N/A
	The test repeated with reversed polarity and the other end of the heating element connected to the sheath		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	The test is not carried out on appliances intended to be permanently connected to fixed wiring, on appliances where an all-pole disconnection occurs during the test of 19.4, or on appliances used in a system with polarized plugs intended for connection to polarized socket outlets		N/A
19.6	Appliances with PTC heating elements tested at rated voltage, establishing steady conditions		N/A
	The working voltage of the PTC heating element is increased by 5 % and the appliance is operated until steady conditions are re-established. The voltage is then increased in similar steps until 1,5 times working voltage or until the PTC heating element ruptures (V).....:		N/A
19.7	Stalling test by locking the rotor if the locked rotor torque is smaller than the full load torque, or		N/A
	locking moving parts of other appliances		N/A
	Locked rotor, capacitors open-circuited one at a time		N/A
	Test repeated with capacitors short-circuited one at a time, unless		N/A
	the capacitor is of class S2 or S3 of IEC 60252-1:2010 including IEC 60252-1:2010/AMD1:2013		N/A
	Appliances with timer or programmer supplied with rated voltage for each of the tests, for a period equal to the maximum period allowed.....:		N/A
	An electronic timer or programmer that operates to ensure compliance with the test before the maximum period under the conditions of Clause 11 is reached, is a protective electronic circuit		N/A
	Other appliances supplied with rated voltage for a period as specified.....:		N/A
	Winding temperatures not exceeding values specified in Table 8..... :	(See appended table)	N/A
19.8	Multi-phase motors operated at rated voltage with one phase disconnected		N/A
19.9	Running overload test on appliances incorporating motors intended to be remotely or automatically controlled or liable to be operated continuously		N/A
	Motor-operated and combined appliances for which 30.2.3 is applicable and that use overload protective devices relying on electronic circuits to protect the motor windings, are also subjected to the test		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Winding temperatures not exceeding values as specified..... :	(See appended table)	N/A
19.10	Series motor operated at 1,3 times rated voltage for 1 min (V)..... :		N/A
	During the test, parts not being ejected from the appliance		N/A
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless		N/A
	they comply with the conditions specified in 19.11.1		N/A
	Appliances incorporating an electronic circuit that relies upon a programmable component to function correctly, subjected to the test of 19.11.4.8, unless		N/A
	restarting does not result in a hazard		N/A
	Appliances having a device with an off position obtained by electronic disconnection, or a device placing the appliance in a stand-by mode, subjected to the tests of 19.11.4		N/A
	If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, the test of 19.12 is carried out		N/A
	During and after each test the following is checked:		N/A
	- the temperature of the windings does not exceed the values specified in Table 8		N/A
	- the appliance complies with the conditions specified in 19.13		N/A
	- any current flowing through protective impedance not exceeding the limits specified in 8.1.4		N/A
	If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided both of the following conditions are met:		N/A
	- the base material of the printed circuit board withstands the test of normative Annex E		N/A
	- any loosened conductor does not reduce clearance or creepage distances between live parts and accessible metal parts below the values specified in clause 29		N/A
19.11.1	Fault conditions a) to g) in 19.11.2 are not applied to circuits or parts of circuits meeting both of the following conditions:		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- the electronic circuit is a low-power circuit, that is, the maximum power at low-power points does not exceed 15 W according to the tests specified		N/A
	- the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction of other parts of the appliance does not rely on the correct functioning of the electronic circuit		N/A
19.11.2	Fault conditions applied one at a time, the appliance operating under conditions specified in clause 11, but supplied at rated voltage, duration of the tests as specified:		N/A
	a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in clause 29		N/A
	b) open circuit at the terminals of any component		N/A
	c) short circuit of capacitors, unless		N/A
	they comply with IEC 60384-14:2013 including IEC 60384-14:2013/AMD:2016		N/A
	d) short circuit of any two terminals of an electronic component, other than integrated circuits		N/A
	This fault condition is not applied between the two circuits of an optocoupler		N/A
	e) failure of triacs in the diode mode		N/A
	f) failure of microprocessors and integrated circuits		N/A
	g) failure of an electronic power switching device		N/A
	Each low power circuit is short-circuited by connecting the low-power point to the pole of the supply source from which the measurements were made		N/A
	Any cord between a battery-operated appliance consuming more than 15 W and the detachable power supply part short-circuited as specified		N/A
19.11.3	If the appliance incorporates a protective electronic circuit that operates to ensure compliance with clause 19, the appliance is tested as specified		N/A
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or		N/A
	a device that can be placed in the stand-by mode,		N/A
	subjected to the tests of 19.11.4.1 to 19.11.4.7, the device being set in the off position or in the stand-by mode		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 to 19.11.4.7, the tests being carried out after the protective electronic circuit has operated as specified, however		N/A
	tests of electromagnetic phenomena not applied to protective electronic circuits operating during 19.7 in appliances that are used while attended		N/A
	Surge protective devices disconnected, unless		N/A
	they incorporate spark gaps		N/A
19.11.4.1	The appliance is subjected to electrostatic discharges in accordance with IEC 61000-4-2, test level 4		N/A
19.11.4.2	The appliance is subjected to radiated fields in accordance with IEC 61000-4-3, at frequency ranges as specified		N/A
19.11.4.3	The appliance is subjected to fast transient bursts in accordance with IEC 61000-4-4, test level 3 or 4 as specified		N/A
19.11.4.4	The power supply terminals of the appliance subjected to voltage surges in accordance with IEC 61000-4-5 as specified		N/A
	An open circuit test voltage of 2 kV is applicable for the line-to-line coupling mode		N/A
	An open circuit test voltage of 4 kV is applicable for the line-to-earth coupling mode		N/A
	Earthed heating elements in class I appliances disconnected		N/A
	For appliances having surge arresters incorporating spark gaps, tests repeated at 95 % of the flashover voltage		N/A
19.11.4.5	The appliance is subjected to injected currents in accordance with IEC 61000-4-6, test level 3		N/A
19.11.4.6	Appliances having a rated current not exceeding 16 A are subjected to the class 3 voltage dips and interruptions in accordance with IEC 61000-4-11:2020		N/A
	Appliances having a rated current exceeding 16 A are subjected to the class 3 voltage dips and interruptions in accordance with IEC 61000-4-34:2005 including IEC 61000-4-34:2005/AMD1:2009		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
19.11.4.7	The appliance is subjected to mains signals in accordance with IEC 61000-4-13:2002 including IEC 61000-4-13:2002/AMD1:2009 and IEC 61000-4-13:2002/AMD2:2015, test level class 2		N/A
19.11.4.8	The appliance is supplied at rated voltage and operated under normal operation. After 60 s the power supply is reduced to a level such that the appliance ceases to respond or parts controlled by the programmable component cease to operate		N/A
	The appliance continues to operate normally, or		N/A
	requires a manual operation to restart		N/A
19.12	If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 60127, the test is repeated, measuring the current flowing through the fuse-link; measured current (A); current rating of the fuse-link (A).....:		N/A
19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts		P
	Temperature rises not exceeding the values shown in table 9.....:	(See appended table)	P
	Compliance with clause 8 not impaired		P
	If the appliance can still be operated, it complies with 20.2		P
	There shall be no leakage from the container during the test (IEC 60335-2-21)		P
	Insulation, other than of class III appliances or class III constructions that do not contain live parts, withstands the electric strength test of 16.3, the test voltage as specified in Table 4:		N/A
	- basic insulation (V).....:		N/A
	- supplementary insulation (V).....:		N/A
	- reinforced insulation (V).....:		N/A
	After operation or interruption of a control, clearances and creepage distances across the functional insulation withstand the electric strength test of 16.3, the test voltage being twice the working voltage		N/A
	The appliance does not undergo a dangerous malfunction, and		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	no failure of protective electronic circuits, if the appliance is still operable		N/A
	For accessible safety extra-low voltage outlets, connectors, or USB outlets, no increase of the no-load output voltage by more than 3 V or 10 % of the voltage in normal use, whichever higher, with a maximum/peak of 42,4 VDC/VAC		N/A
	Appliances tested with an electronic switch in the off position, or in the stand-by mode:		N/A
	- do not become operational, or		N/A
	- if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4		N/A
	If the appliance contains lids or doors that are controlled by one or more interlocks, one of the interlocks may be released provided that both:		N/A
	- the lid or door does not move automatically to an open position when the interlock is released, and		N/A
	- the appliance does not start after the cycle in which the interlock was released		N/A
19.14	Appliances operated under the conditions of clause 11, any contactor or relay contact operating under the conditions of clause 11 being short-circuited		N/A
	For a relay or contactor with more than one contact, all contacts are short-circuited at the same time		N/A
	A relay or contactor operating only to ensure the appliance is energized for normal use is not short-circuited		N/A
	If more than one relay or contactor operates in clause 11, they are short-circuited in turn		N/A
	If the appliance has several modes of operation, the tests are carried out with the appliance operating in each mode, if necessary		N/A
19.15	For appliances with a mains voltage selector switch, the switch is set to the lowest rated voltage position and the highest value of rated voltage is applied		N/A
19.16	Appliances having mains connection and replaceable batteries supplied at rated voltage and operated under normal operation but with batteries removed or in any position allowed by construction		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
19.17	For battery-operated appliances incorporating a battery using metal-ion chemistry, the battery system is operated according to the instructions and tested under the following conditions, duration as specified:		N/A
	a) series configured battery:		N/A
	- imbalance introduced into fully discharged battery by charging one cell to the percentage of being fully charged applied during the test of Clause 12;		N/A
	- single cell or parallel only configured battery: fully discharged		N/A
	b) series configured battery: imbalance introduced as specified and fully charged, if the test of clause 12 was conducted with an imbalance of less than 50 % and if a single fault in the circuitry results in the loss of maintaining balance		N/A
	c) series configured battery: cells at 50 % of full charge, except one which is shortened, battery then fully charged		N/A
	d) fully charged battery connected to the charging system: short circuit introduced to the charging system as specified to produce the most unfavourable results, and for a charging system with a cord connecting to the battery, short circuit introduced at a point producing the most adverse effects; resistance of short circuit not exceeding 10 mΩ		N/A
	No explosion or ignition of the battery during or after the test		N/A
	Voltage on any cell not exceeding upper limit charging voltage by more than 150 mV, unless		N/A
	charging system permanently disabled from recharging battery, checked as specified		N/A
	Recharging considered to be permanently disabled, if:		N/A
	- battery discharged to approximately 50 % of full charge, by using the battery-operated appliance tested (in case of an integral battery), or		N/A
	by using a new sample of the battery-operated appliance (in case of a detachable and separable battery)		N/A
	- attempt made to recharge battery normally		N/A
	- no charging current after 10 min or after 25 % of the nominal capacity has been delivered, whichever occurs first		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
19.101	Appliance tested for 24h as specified in clause 11 but with empty container (IEC 60335-2-21)		P
<b>20</b>	<b>STABILITY AND MECHANICAL HAZARDS</b>		-
20.1	Appliances having adequate stability		N/A
	Tilting test through an angle of 10°, appliance placed on an inclined plane/horizontal support, not connected to the supply mains; appliance does not overturn		N/A
	Tilting test repeated on appliances with heating elements, angle of inclination increased to 15°		N/A
	Possible heating test in overturned position; temperature rise does not exceed values shown in Table 9		N/A
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury		N/A
	Protective enclosures, guards and similar parts are non-detachable, and		N/A
	have adequate mechanical strength		N/A
	Enclosures that can be opened by overriding an interlock are considered to be detachable parts		N/A
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard by unexpected closure		N/A
	Not possible to touch dangerous moving parts with the test probes, checked by:		N/A
	- inspection		N/A
	- test of 21.1		N/A
	- applying a force not exceeding 5 N by means of a test probe similar to test probe B of IEC 61032 but having a circular stop face with a diameter of 50 mm, instead of the noncircular face		N/A
	- applying test probe 18 of IEC 61032 with a force not exceeding 2,5 N, if appliance intended for non-commercial use or to be installed in an area open to the public		N/A
<b>21</b>	<b>MECHANICAL STRENGTH</b>		-
21.1	Appliance has adequate mechanical strength and is constructed as to withstand rough handling		P

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Checked by applying 3 blows to every point of the enclosure likely to be weak, in accordance with test Ehb of IEC 60068-2-75, spring hammer test, with an impact energy of 0,5 J	(See appended table)	P
	Appliances and parts of appliances having pins for insertion into mains socket-outlets subjected to the test, Free fall repeated, procedure 2, of IEC 60068-2-31, under the specified conditions		N/A
	The appliance shows no damage impairing compliance with this standard, and		N/A
	compliance with 8.1, 15.1 and clause 29 not impaired		N/A
	If doubt, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N/A
	If necessary, repetition of groups of three blows on a new sample		N/A
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		N/A
	Test not applicable if the thickness of supplementary insulation is at least 1 mm and reinforced insulation at least 2 mm		N/A
	The insulation is tested as specified, and does withstand the electric strength test of 16.3		N/A
21.3	Appliances with pins for insertion into socket-outlets with a rotating plug part are provided with a mechanical stop to prevent rotation having adequate mechanical strength and constructed to withstand rough handling		N/A
	Application of a torque of 2 Nm for 1 min does not result in rotation of the plug part after rotating it until the mechanical stop prevents further rotation, both directions checked		N/A
<b>22</b>	<b>CONSTRUCTION</b>		-
22.1	Appliance marked with the first numeral or any of the additional letters of the IP system		P
22.2	Stationary appliance: means to ensure disconnection from the supply being provided:		N/A
	- a supply cord fitted with a plug, or		N/A
	- a switch providing all-pole disconnection complying with 24.3, or		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided, or		N/A
	- an appliance inlet		N/A
	Single-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 0I and class I appliances, connected to the line conductor		N/A
22.3	Appliance provided with pins: no undue strain on socket-outlets		P
	Means for retaining pins withstand the forces to which the pins are like to be subjected in normal use		P
	Applied torque not exceeding 0,25 Nm, torque to keep the socket-outlet itself in the vertical plane not included in this value		P
	Pull force of 50 N for 1 min to each pin after the appliance has been placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1 mm		P
	Each pin subjected to a torque of 0,4 Nm; the pins are not rotating, unless		P
	rotating does not impair compliance with this standard		P
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		N/A
22.5	No risk of electric shock from charged capacitors resulting in a capacitance equal or greater than 0,1 $\mu$ F when touching pins, the appliance being disconnected from the supply at the instant of voltage peak		N/A
	Voltage not exceeding 34 V (V)..... :		N/A
	If compliance relies on the operation of an electronic circuit, the electromagnetic phenomena tests of 19.11.4.3 and 19.11.4.4 are applied		N/A
	The test for measuring the voltage between the pins of the plug is then repeated three times, voltage not exceeding 34 V (V)..... :		N/A
22.6	Electrical insulation not affected by condensing water or leaking liquid		P

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Electrical insulation of class II appliances not affected if a hose ruptures or seal leaks		N/A
	In case of doubt, test as described		N/A
	Drain hole correct positioned to prevent water from impairing electrical insulation (IEC 60335-2-21)		N/A
	Dimension of drain hole: min. $\varnothing=5\text{mm}$ or $20\text{ mm}^2$ with width min. 3mm (IEC 60335-2-21)		N/A
22.7	Adequate safeguards against the risk of excessive pressure in appliances containing liquid or gases or having steam-producing devices		P
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		N/A
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless		P
	the substance has adequate insulating properties		P
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance, if:		P
	- a non-self-resetting thermal cut-out is required by the standard, and		P
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		P
	Non-self-resetting thermal motor protectors have a trip-free action, unless		N/A
	they are voltage maintained		N/A
	Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely		N/A
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P
	Obvious locked position of snap-in devices used for fixing such parts		N/A
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Tests as described		N/A
22.12	Handles, knobs, etc. fixed in a reliable manner, if loosening could result in a hazard, including a choking hazard		P
	Requirement concerning the choking hazard does not apply to commercial appliances		N/A
	Removing or fixing in wrong position of handles, knobs, etc. indicating position of switches or similar components not possible, if resulting in a hazard		N/A
	No use of sealing compound and similar materials, other than self-hardening resins, to prevent loosening		N/A
	Axial force of 15 N applied for 1 min to parts unlikely to be subjected to axial pull in normal use		P
	Axial force of 30 N applied for 1 min to parts likely to be subjected to axial pull in normal use		P
	Loosening of removed parts not resulting in a choking hazard, checked with small parts cylinder		N/A
22.13	Unlikely that handles, when gripped as in normal use, make the operator's hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		N/A
22.14	No ragged or sharp edges creating a hazard for the user in normal use or during user maintenance		P
	No exposed pointed ends of self-tapping screws or other fasteners likely to be touched by the user in normal use or during user maintenance		P
22.15	Storage hooks and the like for flexible cords smooth and well rounded		N/A
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductor strands and no undue wear of contacts		N/A
	Cord reel tested with 6 000 operations, as specified		N/A
	Electric strength test of 16.3, voltage of 1 000 V applied		N/A
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		N/A
22.18	Current-carrying parts and other metal parts resistant to corrosion, unless		P



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	made from stainless steel, plated steel or similar corrosion-resistant alloys		N/A
22.19	Driving belts not relied upon to provide the required level of insulation, unless		N/A
	constructed to prevent inappropriate replacement		N/A
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless		P
	material used is non-corrosive, non-hygroscopic and non-combustible, or thermal insulation is glass-wool		N/A
	Thermal insulation not used for basic insulation of internal wiring (IEC 60335-2-21)		P
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless		P
	impregnated		N/A
	Requirement not applicable to magnesium oxide and mineral ceramic fibres electrically insulating heating elements and insulating material where fibre interstices are filled with a suitable insulant		N/A
22.22	Appliances not containing asbestos		P
22.23	Oils containing polychlorinated biphenyl (PCB) not used		P
22.24	Bare heating elements, except in class III appliances or class III constructions that do not contain live parts, adequately supported		N/A
	In case of rupture, the heating conductor is unlikely to come into contact with accessible metal parts		N/A
22.25	Sagging heating conductors cannot come into contact with accessible metal parts		N/A
	Requirement not applicable to class III appliances or class III constructions without live parts, appliances where a core effectively prevents sagging, or where supplementary insulation prevents contact		N/A
22.26	For class III constructions, the insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		N/A
22.27	Parts connected by protective impedance separated by double or reinforced insulation		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
22.28	Metal parts of class II appliances conductively connected to gas pipes or in contact with water separated from live parts by double or reinforced insulation		N/A
22.29	Class II appliances permanently connected to fixed wiring constructed so that the required degree of access to live parts is maintained after installation		N/A
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		N/A
	constructed so that they cannot be replaced in an incorrect position and if omitted, the appliance is rendered inoperable or manifestly incomplete		N/A
22.31	Neither clearances nor creepage distances over supplementary and reinforced insulation reduced below values in clause 29 as a result of wear		P
	Neither clearances nor creepage distances between live parts and accessible parts reduced below values for supplementary insulation if wires, screws, etc. become loose		P
22.32	Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in clause 29		N/A
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		N/A
	Ceramic material not tightly sintered, similar materials or beads alone not used as supplementary or reinforced insulation		N/A
	Ceramic and similar porous material in which heating conductors are embedded is considered to be basic insulation, not reinforced insulation		N/A
	No visible cracks after oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		N/A
22.33	Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with live parts, or		P
	unearthed metal parts separated from live parts by basic insulation only		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Electrodes not used for heating liquids		P
	For class II constructions, conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with basic or reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	For class II constructions, conductive liquids which are in contact with live parts are not in direct contact with reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	An air layer not used as basic or supplementary insulation in a double insulation system if likely to be bridged by leaking liquid		N/A
22.34	Shafts of operating knobs, handles, levers etc. not live, unless		P
	the shaft is not accessible when the part is removed		N/A
22.35	For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation		P
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of a failure of basic insulation, are either adequately covered by insulation material or their accessible parts are separated from their shafts or fixings by supplementary insulation		N/A
	This requirement does not apply to handles, levers and knobs on stationary appliances and cordless appliances, other than those of electrical components, provided they are reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N/A
	Insulating material covering metal handles, levers and knobs withstands the electric strength test of 16.3 for supplementary insulation		P
22.36	For appliances other than class III appliances, handles continuously held in the hand in normal use so constructed that when gripped as in normal use, the operator's hand is not likely to touch metal parts, unless		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	they are separated from live parts by double or reinforced insulation		P
22.37	Capacitors in class II appliances not connected to accessible metal parts and their casings, if of metal, separated from accessible metal parts by supplementary insulation, unless		N/A
	the capacitors comply with 22.42		N/A
22.38	Capacitors not connected between the contacts of a thermal cut-out		N/A
22.39	Lampholders used only for the connection of lamps		N/A
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible		N/A
	If the appliance cannot operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch for stopping the operation. The actuating member of the switch being easily visible and accessible		N/A
22.41	No components, other than lamps, containing mercury		P
22.42	Protective impedance consisting of at least two separate components		N/A
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited		N/A
	Resistors checked by the test of 14.2 a) in IEC 60065:2014		N/A
	Capacitors checked by the tests for class Y capacitors in IEC 60384-14:2013 including IEC 60384-14:2013/AMD1:2016		N/A
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur		N/A
22.44	Appliances not having an enclosure that is shaped or decorated like a toy, unless		N/A
	a toy is shaped like the appliance		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
22.45	When air is used as reinforced insulation, clearances not reduced below the values in 29.1.3 due to deformation of the enclosure, applying a force of 30 N to accessible surfaces		P
22.46	For programmable protective electronic circuits used to ensure compliance with the standard, the software contains measures to control the fault/error conditions in Table R.1		N/A
	These requirements are not applicable to software used for functional purpose or compliance with clause 11		N/A
	Compliance checked by evaluating the software in accordance with the relevant requirements of normative Annex R		N/A
	If the software is modified, the evaluation and relevant tests are repeated if the modification influences the results of the test involving protective electronic circuits		N/A
22.47	Appliances shall withstand the water pressure occurring in normal use. (IEC 60335-2-21)		P
	-twice the rated pressure, for closed water heaters. If the water heater is supplied through a pressure reducing valve, the container is subjected to twice the working pressure instead;		P
	-1,5 times rated pressure, for cistern-fed water heaters and low-pressure water heaters;		N/A
	- 0,15 MPa, for open-outlet water heaters		N/A
	- 0,03 MPa, for cistern-type water heaters.		N/A
	Water shall not leak from the appliance and there shall be no permanent deformation to such an extent that compliance with this standard is impaired.		N/A
	No leakage from any part, including any inlet water hose		P
22.48	Appliances connected to the water mains constructed to prevent back-siphonage of non-potable water		P
22.49	For remote operation, the duration of operation is to be set before the appliance can be started, unless		N/A
	the appliance switches off automatically or can operate continuously without hazard		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation		N/A
22.51	There is a control on the appliance manually adjusted to the setting for remote operation before the appliance can be operated in this mode		N/A
	There is a visual indication showing that the appliance is adjusted for remote operation		N/A
	These requirements are not necessary on appliances that can operate as follows, without giving rise to a hazard:		N/A
	- continuously, or		N/A
	- automatically, or		N/A
	- remotely		N/A
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold		N/A
22.53	Class II appliances and class III appliances that incorporate functionally earthed parts have at least double insulation or reinforced insulation between live parts and the functionally earthed parts		N/A
22.54	Button cells and batteries designated R1 not accessible without the aid of a tool, unless		N/A
	the cover of their compartment can only be opened after at least two independent movements have been applied simultaneously		N/A
22.55	Devices operated to stop the intended function of the appliance, if any, are being distinguished from other manual devices by means of shape, size, surface texture, or position.....:		N/A
	The requirement concerning position does not preclude use of a push on push off switch		N/A
	An indication when the device has been operated is given by:		N/A
	- tactile feedback from the actuator or from the appliance, or		N/A
	- reduction in heat output, or		N/A
	- audible and visible feedback		N/A
22.56	Detachable power supply part provided with the part of class III construction		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
22.57	The properties of non-metallic materials do not degrade from exposure to UV-C radiation, as specified in normative Annex T		N/A
	This requirement does not apply to glass, ceramics or similar materials		N/A
22.58	Appliances connected to the supply mains by an appliance inlet are provided with a cord set or a connector for attachment to a suitable flexible cord, except from		N/A
	- appliances complying with IEC 60320-3, or		N/A
	- single phase appliances having a rated current exceeding 16 A, connected to mains by an appliance inlet complying with IEC 60309-2, or		N/A
	- multi-phase appliances connected to mains by an appliance inlet complying with IEC 60309-2		N/A
22.59	Protective extra-low voltage circuits separated by at least supplementary insulation from circuits operating at safety extra-low voltage		N/A
22.60	Functional earthing terminals and functional earthing contacts not connected to the neutral terminal		N/A
22.61	Appliance outlets complying with the standard sheets in IEC 60320-3 accessible to the user and socket outlets accessible to the user are single phase, if:		N/A
	- they are incorporated in appliances connected to the supply mains, and		N/A
	- they operate at rated voltage		N/A
	Current rating not exceeding 16 A (A).....:		N/A
	Appliance outlets accessible to the user, other than those supplying accessories, and socket-outlets accessible to the user are protected by one of the following:		N/A
	- a circuit breaker for equipment complying with IEC 60934, or		N/A
	- a non-user replaceable fuse-link		N/A
	Current rating of protective device not exceeding current rating of the appliance outlet or socket-outlet (A).....:		N/A
	Protective device placed behind a non-detachable cover		N/A
	Current rating of appliance outlets and socket-outlets marked with the outlet load in watts, obtained from the market outlet load divided by the rated voltage (A).....:		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
22.62	Remote communication through public networks does not impair compliance with this standard		N/A
	The requirement does only apply to remote communication where the download of software or the transmission of data:		N/A
	a) includes measures according to normative Annex R necessary for compliance with 22.46, or		N/A
	Includes means necessary for compliance with Clauses 8 to 32		N/A
	b) only affects the software part that is not covered by a), but where compliance might be impaired due to improper separation of partitioning from the software or data in a)		N/A
	The requirement does not apply to appliances:		N/A
	- where all measures to comply with this standards are independent of software,		N/A
	- using remote communication through public networks for the send-only transmission of data, or		N/A
	- that only provide event driven messages or push remote monitoring		N/A
	Compliance checked by inspection of the product and the technical documentation, and by the requirements and tests in normative Annex U		N/A
22.101	The rated pressure of	(IEC 60335-2-21)	P
	- closed water heaters intended for direct connection to the water main shall be at least 0.6 MPa		P
	- closed water heaters and low pressure water heaters to be supplied by a pressure reducing valve which is not incorporated in the appliance shall be at least 0.1 MPa		N/A
	Cistern-fed water heaters: -rated pressure max. 0.2 MPa		N/A
22.102	Closed water heaters shall be constructed so that repeated drawing off does not cause the water to boil. (IEC 60335-2-21)		P
	Temperature of the water, measured by means of a thermocouple at the outlet, shall not exceed 98 °C		P
22.103	Closed water heaters: pressure relief device prevent pressure from exceeding rated pressure by more than 0.1 MPa (IEC 60335-2-21)		P

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
22.104	Outlet of open-outlet water heaters shall be constructed so that the water flow is not limited to such an extent that the container is subjected to a significant pressure. (IEC 60335-2-21)		N/A
	The vent pipe of low pressure water heaters shall have an internal diameter of at least 20mm		N/A
22.105	Cistern-type water heaters shall be constructed so that the container is always at atmospheric pressure by means of a vent having an area of at least 30 mm <sup>2</sup> and a minimum dimension of at least 3 mm (IEC 60335-2-21)		P
22.106	Closed water heaters: thermal cut-out providing all-pole disconnection, independent from the thermostat (IEC 60335-2-21)		P
22.107	Heating elements and thermal control sensors in contact with the outer surface of the container shall be held in position securely. (IEC 60335-2-21)		N/A
22.108	Appliances for wall mounting shall have reliable provision for fixing to a wall, independent of the connection to the water mains. (IEC 60335-2-21)		P
22.109	Appliances having a capacity of more than 15 l that cannot be emptied through a drain fitted in the water pipes shall incorporate means for draining that requires a tool for its operation (IEC 60335-2-21)		P
22.110	Open-outlet water heaters with plastic enclosure instructions ensure correct installation (see NOTE) (IEC 60335-2-21)		N/A
22.111	Closed water heaters with heat exchanger shall be constructed so that during normal use the thermal cut-out does not operate due to heat from the exchanger. (IEC 60335-2-21)		P
<b>23</b>	<b>INTERNAL WIRING</b>		-
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins, etc.		P
	Wire holes in metal well-rounded or provided with bushings		N/A
	Wiring effectively prevented from coming into contact with moving parts		N/A
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Beads inside flexible metal conduits contained within an insulating sleeve		N/A
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		P
	Flexible metallic tubes not causing damage to insulation of conductors		N/A
	Open-coil springs not used		N/A
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N/A
	No damage after 10 000 flexings for conductors flexed during normal use, or		N/A
	100 flexings for conductors flexed during user maintenance		N/A
	Electric strength test of 16.3, 1 000 V between live parts and accessible metal parts		N/A
	Not more than 10 % of the strands of any conductor broken, and		N/A
	not more than 30 % for wiring supplying circuits that consume no more than 15 W		N/A
23.4	Bare internal wiring sufficiently rigid and fixed		N/A
23.5	No use of a single layer of internal wiring insulation to provide reinforced insulation		P
	For class II construction, the sheath of a cord complying with IEC 60227 or IEC 60245 or IEC 62821 may provide supplementary insulation		N/A
	Insulation of single layer internal wiring subjected to the supply mains voltage withstands the electrical stress likely to occur in normal use, if:		N/A
	- insulation of single layer internal wiring electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245 or IEC 62821, or		N/A
	- no breakdown when a voltage of 2 000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		N/A
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by clamping at both ends, or		N/A
	be such that it can only be removed by breaking or cutting		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
23.7	The colour combination green/yellow only used for earthing conductors		P
23.8	Aluminium wires not used for internal wiring		P
	The requirement does not apply to windings		N/A
23.9	Stranded conductors not consolidated by soldering where they are subjected to contact pressure, unless		N/A
	the contact pressure is provided by spring terminals		N/A
	The requirement does not apply to the soldered tip of a stranded conductor		N/A
23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52), checked as specified		N/A
<b>24</b>	<b>COMPONENTS</b>		-
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components..... :	(See appended table)	P
	Motors not required to comply with IEC 60034-1, they are tested as part of the appliance		N/A
	Relays tested as part of the appliance, or		N/A
	alternatively, acc. to IEC 60730-1:2013 including IEC 60730-1:2013/AMD1:2015, and meeting the additional requirements in IEC 60335-1		N/A
	The requirements of Clause 29 apply between live parts of components and accessible parts of the appliance		P
	Components can comply with the requirements for clearances and creepage distances for functional insulation in the relevant component standard		P
	30.2 of this standard applies to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections		P
	Components that have not been previously tested to comply with the IEC standard for the relevant component are tested according to the requirements of 30.2		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Components that have been previously tested to comply with the resistance to fire requirements in the IEC standard for the relevant component need not be retested provided that the specified conditions are met		N/A
	If these conditions are not satisfied, the component is tested as part of the appliance		N/A
	Power electronic converter circuits not required to comply with IEC 62477-1, they are tested as part of the appliance		N/A
	If components have not been tested and found to comply with relevant IEC standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		P
	For components mentioned in 24.1.1 to 24.1.9 no additional tests specified in the relevant component standard are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components not tested and found to comply with relevant IEC standard and components not marked or not used according to their marking, tested under the conditions occurring in the appliance		N/A
	Lampholders and starterholders not being previously tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally complying with the gauging and interchangeability requirements of the relevant IEC standard under the conditions occurring in the appliance		N/A
	No additional tests specified for nationally standardized plugs such as those detailed in IEC TR 60083 or connectors or plug connectors complying with the standard sheets of IEC 60320-3 or connectors complying with the standard sheets of IEC 60309-2		P
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing comply with IEC 60384-14:2013 including IEC 60384-14:2013/AMD1:2016		N/A
	If the capacitors have to be tested, they are tested according to normative Annex F		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
24.1.2	Transformers in associated switch mode power supplies comply with Annex BB of IEC 61558-2-16:2009 including IEC 61558-2-16:2009/AMD1:2013		N/A
	Safety isolating transformers comply with IEC 61558-2-6:2009		N/A
	If they have to be tested, they are tested according to normative Annex G		N/A
24.1.3	Switches comply with IEC 61058-1:2016, number of cycles of operation being at least 10 000, unless		N/A
	the appliance meets the requirements of this standard when they are rendered inoperative, then the number of cycles need not to be declared for 7.4 of IEC 61058-1:2016		N/A
	If they have to be tested, they are tested according to normative Annex H		N/A
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		N/A
	If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10 000 as specified, the complete switching system need not be tested		N/A
24.1.4	Automatic controls comply with IEC 60730-1:2013 including IEC 60730-1:2013/AMD1:2015 together with the relevant part 2. The number of cycles of operation being at least:		P
	- thermostats:	10 000	P
	- temperature limiters:	1 000	P
	- self-resetting thermal cut-outs:	300	N/A
	- voltage maintained non-self-resetting thermal cut-outs:	1 000	N/A
	- other non-self-resetting thermal cut-outs:	30	N/A
	- timers:	3 000	N/A
	- energy regulators:	10 000	N/A
	The number of cycles for controls operating during clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited or rendered inoperative		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	If automatic controls have to be tested, additionally tested in accordance with 11.3.5 to 11.3.8 and Clause 17 of IEC 60730-1:2013 including IEC 60730-1:2013/AMD1:2015 as type 1 controls, tests of Clauses 12, 13 and 14 not carried out before the test of Clause 17		N/A
	Thermal motor protectors are tested in combination with their motor under the conditions specified in normative Annex D		N/A
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, degree of protection declared for 6.5.2 of IEC 60730-2-8:2018 is IPX7		N/A
	Thermal cut-outs of the capillary type comply with the requirements for type 2.K controls in IEC 60730-2-9:2015 including 60730-2-9:2015/AMD1:2018		N/A
	Thermal cut-outs incorporated in closed water heaters shall comply with the requirements of IEC 60730-1(EN 60730-1) for type 2B controls, unless they are tested with the appliance. (IEC 60335-2-21)		N/A
24.1.5	Appliance couplers comply with IEC 60320-1		N/A
	However, for appliances classified higher than IPX0, the appliance couplers comply with IEC 60320-2-3		N/A
24.1.6	Small lampholders similar to E10 lampholders comply with IEC 60238, the requirements for E10 lampholders being applicable		N/A
24.1.7	For remote operation of the appliance via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151		N/A
24.1.8	Thermal links comply with IEC 60691		N/A
	Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19		N/A
24.1.9	Contactors and relays, other than motor starting relays, tested as part of the appliance		N/A
	They are also tested in accordance with Clause 17 of IEC 60730-1:2013 including IEC 60730-1:2013/AMD:2015, the number of cycles of operations in 24.1.4 selected according to the contactor or relay function in the appliance.....:		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
24.1.10	Lamps and lamp systems that have not been previously tested and found to comply with the exempt group classification of IEC 62471:2006 GLS regarding E <sub>s</sub> and E <sub>UVA</sub> :		N/A
	- tested as part of the appliance		N/A
	- comply with the requirements of Clause 32 under the conditions occurring in the appliance		N/A
	Unless otherwise specified, the following components are considered to comply with the specified GLS classification:		N/A
	- visible light indicators		N/A
	- infrared sources used for signalling or communication		N/A
	- seven-segment indicators		N/A
	- liquid crystal displays		N/A
	- organic LED displays (OLED)		N/A
	- plasma displays		N/A
24.1.11	Cord sets required to be provided with the appliance comply with IEC 60799		N/A
	Cord sets with cords complying to IEC 62821-3 allowed		N/A
24.2	Appliances not fitted with:		P
	- switches, automatic controls, power supplies and the like in flexible cords		P
	- devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		N/A
	- thermal cut-outs that can be reset by soldering, unless		N/A
	the solder has a melting point of at least 230 °C		N/A
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and have a contact separation in all poles, providing full disconnection under overvoltage category III conditions		N/A
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC TR 60083 or IEC 60906-1 or with connectors, appliance inlets, plug connectors and appliance outlets complying with the standard sheets of IEC 60320-3		P

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
24.5	Capacitors in auxiliary windings of motors marked with their voltage rating and their rated capacitance, and used accordingly		N/A
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times its voltage rating, when the appliance is supplied at 1,1 times rated voltage under minimum load		N/A
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42 V		N/A
	In addition, the motors comply with the requirements of normative Annex I		N/A
24.7	Detachable hose-sets for connection of appliances to the water mains comply with IEC 61770		N/A
	They are supplied with the appliance		N/A
	Appliances intended to be permanently connected to the water mains not connected by a detachable hose-set		N/A
24.8	Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding, not causing a hazard in event of a failure		N/A
	One or more of the following conditions are to be met:		N/A
	- the capacitors are of class S2 or S3 according to IEC 60252-1:2010 including IEC 60252-1:2010/AMD1:2013		N/A
	- the capacitors are housed within a metallic or ceramic enclosure		N/A
	- the distance of separation of the outer surface to adjacent non-metallic parts exceeds 50 mm		N/A
	- adjacent non-metallic parts within 50 mm withstand the needle-flame test of normative Annex E		N/A
	- adjacent non-metallic parts within 50 mm classified as at least V-1 according to IEC 60695-11-10		N/A
	For capacitors complying with IEC 60252-1:2010 including IEC 60252-1:2010/AMD1:2013, damp heat test for 5.14 of that standard with severity parameters as specified		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
24.101	Thermal cut-outs shall be non-self-resetting. They shall have a trip-free switching mechanism or be located so that they can only be reset after removal of a non-detachable cover. (IEC 60335-2-21)		P
24.102	The operating temperature of the thermal cut-out of a closed water heater shall ensure that the water temperature cannot exceed either 99 °C or that the thermal cut out operate before its temperature exceeds 110 °C (IEC 60335-2-21)		P
24.102.1	Tested as specified (IEC 60335-2-21) Water temperature not exceeding 99°C		P
	If compliance relies on the operation of an electronic circuit, the test is repeated under the following conditions applied separately: – the fault conditions in a) to g) of 19.11.2 applied one at a time to the electronic circuit; – the electromagnetic phenomena tests of 19.11.4.1 to 19.11.4.7 applied to the appliance. The temperature of the water at the outlet shall not exceed 99 °C during or after each of the tests		N/A
	If the electronic circuit is programmable, the software shall contain measures to control the fault/error conditions specified in Table R.1 and is evaluated in accordance with the relevant requirements of Annex R.		N/A
24.102.2	Tested as specified The thermal cut-off temperature shall operate before its temperature exceeds 110°C. The water temperature shall not exceed 20K of the maximum permitted operating temperature of the thermal cut-out. (IEC 60335-2-21)		N/A
	If compliance relies on the operation of an electronic circuit, the test is repeated under the following conditions applied separately: – the fault conditions in a) to g) of 19.11.2 applied one at a time to the electronic circuit; – the electromagnetic phenomena tests of 19.11.4.2 and 19.11.4.5 applied to the appliance. The temperature of the water at the outlet shall not exceed 110 °C during or after each of the tests.		N/A
<b>25</b>	<b>SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS</b>		-
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		P

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- supply cord fitted with a plug, the current rating and voltage rating of the plug being not less than the corresponding ratings of its associated appliance		P
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance, or		N/A
	- pins for insertion into socket-outlets		N/A
	Appliance inlet not allowed for appliance having a capacity exceeding 5 l or a <b>rated current</b> exceeding 16 A (IEC 60335-2-21)		N/A
25.2	Appliance not provided with more than one means of connection to the supply mains		N/A
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1 250 V for 1 min between each means of connection causes no breakdown		N/A
25.3	Appliance intended to be permanently connected to fixed wiring provided with one of the following means for connection to the supply mains:		N/A
	- cord anchorage and a set of terminals allowing the connection of a flexible cord		N/A
	- a fitted supply cord		N/A
	- a set of supply leads accommodated in a suitable compartment		N/A
	- a set of terminals for the connection of cables of fixed wiring, cross-sectional areas specified in 26.6, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	- a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate types of cable or conduit, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	For a fixed appliance constructed so that parts can be removed to facilitate easy installation, this requirement is met if it is possible to connect the fixed wiring without difficulty after a part of the appliance has been fixed to its support		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to Table 10 (mm)..... :		N/A
	Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in clause 29		N/A
25.5	Method for assembling the supply cord to the appliance:		P
	- type X attachment		N/A
	- type Y attachment		P
	- type Z attachment, if allowed in relevant part 2		N/A
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N/A
	For multi-phase appliances supplied with a supply cord and that are intended to be permanently connected to fixed wiring, the supply cord is assembled to the appliance by type Y attachment		N/A
25.6	Plugs fitted with only one flexible cord		P
25.7	Supply cords, other than for class III appliances, being one of the following types:		P
	- rubber sheathed (at least 60245 IEC 53), unless		N/A
	The appliance is intended to be used outdoors or is liable to being exposed to ultraviolet radiation		N/A
	- polychloroprene sheathed (at least 60245 IEC 57),		N/A
	supply cords being allowed to be connected to appliances intended for use in low temperature		N/A
	- polyvinyl chloride sheathed. Not used if they are likely to touch metal parts having a temperature rise exceeding 75 K during the test of clause 11		P
	<ul style="list-style-type: none"> <li>light polyvinyl chloride sheathed cord (60227 IEC 52), for appliances not exceeding 3 kg</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>ordinary polyvinyl chloride sheathed cord (60227 IEC 53), for other appliances</li> </ul>		P
	- heat resistant polyvinyl chloride sheathed. Not used for type X attachment other than specially prepared cords		N/A
	<ul style="list-style-type: none"> <li>heat-resistant light polyvinyl chloride sheathed cord (60227 IEC 56), for appliances not exceeding 3 kg</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), for other appliances</li> </ul>		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- halogen-free, low smoke, thermoplastic insulated and sheathed		N/A
	<ul style="list-style-type: none"> <li>light duty halogen-free low smoke flexible cable (62821 IEC 101) for circular cable and (62821 IEC 101f) for flat cable</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>Ordinary duty halogen-free low smoke flexible cable (62821 IEC 102) for circular cable and (62821 IEC 102f) for flat cable</li> </ul>		N/A
	Supply cords for class III appliances adequately insulated		N/A
	Test with 500 V for 2 min for supply cords of class III appliances that contain live parts		N/A
25.8	Nominal cross-sectional area of supply cords not less than Table 11; rated current (A); cross-sectional area (mm <sup>2</sup> )..... :		P
25.9	Supply cords not in contact with sharp points or edges		N/A
25.10	Supply cord of class I appliances have a green/yellow core for earthing		P
	In multi-phase appliances, the colour of the neutral conductor of the supply cord is blue		N/A
	Where additional neutral conductors are provided in the supply cord:		N/A
	- other colours may be used for these additional neutral conductors;		N/A
	- all of the neutral conductors and line conductors are identified by marking using the alphanumeric notation specified in IEC 60445		N/A
	- the supply cord is fitted to the appliance		N/A
25.11	Conductors of supply cords not consolidated by soldering where they are subject to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
	The requirement does not apply to the soldered tip of a stranded conductor		N/A
25.12	Insulation of the supply cord not damaged when moulding the cord to part of the enclosure		N/A
25.13	Inlet openings so constructed as to prevent damage to the supply cord		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	If it is not evident that the supply cord can be introduced without risk of damage, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		N/A
	If unsheathed supply cord, a similar additional bushing or lining is required, unless the appliance is:		N/A
	- a class 0 appliance, or		N/A
	- a class III appliance not containing live parts		N/A
25.14	Supply cords moved while in operation adequately protected against excessive flexing, unless		N/A
	appliance is fitted with automatic cord reels complying with the requirement and test of 22.16		N/A
	Flexing test, as described:		N/A
	- applied force (N).....:		N/A
	- number of flexings.....:		N/A
	The test does not result in:		N/A
	- short-circuit between the conductors, such that the current exceeds a value of twice the rated current		N/A
	- breakage of more than 10 % of the strands of any conductor		N/A
	- separation of the conductor from its terminal		N/A
	- loosening of any cord guard		N/A
	- damage to the cord or the cord guard		N/A
	- broken strands piercing the insulation and becoming accessible		N/A
25.15	For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage		N/A
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		N/A
	Pull and torque test of supply cord:		N/A
	- fixed appliances: pull 100 N; torque (not on automatic cord reel) (Nm).....:		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- other appliances: values shown in Table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm)..... :		N/A
	Cord not damaged and max. 2 mm displacement of the cord		N/A
25.16	Cord anchorages for type X attachments constructed and located so that:		N/A
	- replacement of the cord is easily possible		N/A
	- it is clear how the relief from strain and the prevention of twisting are obtained		N/A
	- they are suitable for different types of supply cord		N/A
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless		N/A
	they are separated from accessible metal parts by supplementary insulation		N/A
	- the cord is not clamped by a metal screw which bears directly on the cord		N/A
	- at least one part of the cord anchorage securely fixed to the appliance, unless		N/A
	it is part of a specially prepared cord		N/A
	Not applicable if the cord anchorage comprises one or more clamping members subjected to pressure by means of nuts engaging with securely attached studs, even if removal possible, or if		N/A
	one clamping member is fixed to the appliance or obviously shaped insulating material is used as the surface of the appliance		N/A
	- screws which have to be operated when replacing the cord do not fix any other component, unless		N/A
	the appliance becomes inoperative or incomplete or the parts cannot be removed without a tool		N/A
	- if labyrinths can be bypassed, the test of 25.15 is nevertheless withstood		N/A
	- for class 0, 0I and I appliances, they are of insulating material or are provided with an insulating lining, unless		N/A
	failure of the insulation of the cord does not make accessible metal parts live		N/A
	- for class II appliances, they are of insulating material, or		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	if of metal, they are insulated from accessible metal parts by supplementary insulation		N/A
	Compliance checked by inspection and by the test of 25.15 under the following conditions:		N/A
	- carried out with lightest permissible type of cord of the smallest cross-sectional area specified in Table 13, then with next heavier type cord having the largest cross-sectional area specified, however		N/A
	if the appliance is fitted with a specially prepared cord, test carried out with this cord		N/A
	- conductors placed in the terminals and any terminal screws tightened to prevent the conductors from easily changing their position		N/A
	- clamping screws of the cord anchorage tightened with two-thirds of the torque specified in 28.1		N/A
	- screws of insulating material bearing directly on the cord fastened with two-thirds of the torque specified in column I of Table 14, the length of the slot in the screw head being taken as the nominal diameter of the screw		N/A
	After the test, the conductors have not moved by more than 1 mm in the terminals		N/A
25.17	Adequate cord anchorages for type Y and Z attachment, test with the cord supplied with the appliance		P
25.18	Cord anchorages only accessible with the aid of a tool, or		P
	constructed so that the cord can only be fitted with the aid of a tool		N/A
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N/A
	Tying the cord into a knot or tying the cord with string not used		N/A
25.20	The conductors of the supply cord for type Y and Z attachment insulated from accessible metal parts		P
25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed:		N/A
	- to permit checking of conductors with respect to correct positioning and connection before fitting any cover		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- so there is no risk of damage to the conductors or their insulation when fitting the cover		N/A
	- for portable appliances, so that the uninsulated end of a conductor, if it becomes free from the terminal, prevented from contact with accessible metal parts		N/A
	2 N test to the conductor for portable appliances; no contact with accessible metal parts		N/A
25.22	Appliance inlets:		N/A
	- live parts not accessible during insertion or removal		N/A
	Requirement not applicable to appliance inlets complying with IEC 60320-1		N/A
	- connector can be inserted without difficulty		N/A
	- the appliance is not supported by the connector		N/A
	- not for cold conditions if temp. rise of external metal parts exceeds 75 K during clause 11, unless		N/A
	the flexible cord of the cord set is unlikely to touch such metal parts		N/A
25.23	Interconnection cords comply with the requirements for the supply cord, except that:		N/A
	- the cross-sectional area of the conductors is determined based on the maximum current during clause 10, and		N/A
	if the current is greater than the rated current, but not exceeding the rated current by more than the current deviation in Table 2, the cross-sectional area does not need to be greater than the one of the conductors in the supply cord		N/A
	- the thickness of the insulation may be reduced		N/A
	- for class I or class II appliance with class III construction, the cross-sectional areas of the conductors need not comply with 25.8 if specified conditions are met		N/A
	If necessary, electric strength test of 16.3		N/A
25.24	Interconnection cords not detachable without the aid of a tool if compliance with this standard is impaired when they are disconnected		N/A
25.25	Dimensions of pins that are inserted into socket-outlets compatible with the dimensions of the relevant socket-outlet		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in IEC TR 60083		N/A
<b>26</b>	<b>TERMINALS FOR EXTERNAL CONDUCTORS</b>		-
26.1	Appliances provided with terminals or equally effective devices, such as male tabs of flat quick-connect terminations (IEC 61210), screw type terminals (IEC 60998-2-1), screwless terminals (IEC 60998-2-2) and clamping units (IEC 60999-1:1999), for connection of external conductors		P
	Terminals only accessible after removal of a non-detachable cover, except		P
	for class III appliances that do not contain live parts		N/A
	Earthing terminals and functional earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		N/A
26.2	Appliances with type X attachment and appliances for the connection of cables of fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless		N/A
	the connections are soldered		N/A
	Screws and nuts not used to fix any other component, except		N/A
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N/A
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone, unless		N/A
	barriers provided so that neither clearances nor creepage distances between live parts and other metal parts reduced below the values for supplementary insulation if the conductor becomes free at the soldered joint		N/A
26.3	Terminals for type X attachment and for connection of cables of fixed wiring constructed so that the conductor is clamped between metal surfaces with sufficient contact pressure but without damaging the conductor		N/A
	Terminals fixed so that when the clamping means is tightened or loosened:		N/A
	- the terminal does not become loose		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- internal wiring is not subjected to stress		N/A
	- neither clearances nor creepage distances are reduced below the values in clause 29		N/A
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1:1999, the torque applied being equal to two-thirds of the torque specified (Nm)..... :		N/A
	No deep or sharp indentations of the conductors		N/A
26.4	Terminals for type X attachment, except those having a specially prepared cord and those for the connection of cables of fixed wiring, no special preparation of conductors such as by soldering, use of cable lugs, eyelets or similar,		N/A
	Reshaping of the conductor before its introduction into the terminal or twisting a stranded conductor to consolidate the end is not considered special preparation		N/A
	Terminals constructed or placed so that conductors prevented from slipping out when clamping screws or nuts are tightened		N/A
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard		N/A
	Stranded conductor test, 8 mm insulation removed		N/A
	No contact between live parts and accessible metal parts and,		N/A
	for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		N/A
26.6	Terminals for type X attachment and for connection of cables of fixed wiring suitable for connection of conductors with cross-sectional area according to Table 13; rated current (A); nominal cross-sectional area (mm <sup>2</sup> )..... :		N/A
	If a specially prepared cord is used, terminals need only be suitable for that cord		N/A
26.7	Terminals for type X attachment, except in class III appliances not containing live parts, accessible after removal of a cover or part of the enclosure		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
26.8	Terminals for the connection of fixed wiring, including the earthing terminal, located close to each other		N/A
26.9	Terminals of the pillar type constructed and located as specified		N/A
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless		N/A
	ends of conductors fitted with means suitable for screw terminals		N/A
	Pull test of 5 N to the connection		N/A
26.11	For type Y and Z attachment, soldered, welded, crimped or similar connections may be used		P
	For class II appliances, the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		N/A
	If soldering, welding or crimping alone used, barriers provided so that clearances and creepage distances between live parts and other metal parts are not reduced below the values for supplementary insulation if the conductor becomes free		N/A
<b>27</b>	<b>PROVISION FOR EARTHING</b>		-
27.1	Accessible metal parts, including metal parts behind a decorative cover that does not withstand the test of 21.1, of class 0I and I appliances permanently and reliably connected to an earthing terminal or earthing contact of the appliance inlet		P
	Earthing terminals and earthing contacts not connected to the neutral terminal		P
	Class 0, II and III appliances have no provision for protective earthing		N/A
	Safety extra-low voltage circuits not earthed, unless		N/A
	protective extra-low voltage circuits		N/A
	Class I water heaters, sheath of heating element permanently and reliably connected to earthing terminal, unless (IEC 60335-2-21)		P
	-provided with inlet and outlet pipes of metal permanently and reliably connected to earthing terminal (IEC 60335-2-21)		N/A
	-other accessible metal parts in contact with the water permanently and reliably connected to earthing terminal (IEC 60335-2-21)		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
27.2	Clamping means of earthing terminals adequately secured against accidental loosening		N/A
	Terminals for the connection of external equipotential bonding conductors allow connection of conductors of 2,5 mm <sup>2</sup> to 6 mm <sup>2</sup> , and		N/A
	- do not provide earthing continuity between different parts of the appliance, and		N/A
	- conductors cannot be loosened without the aid of a tool		N/A
27.3	For a detachable part having an earth connection and being plugged into another part of the appliance, the earth connection is made before and separated after current-carrying connections when removing the part		N/A
	For appliances with supply cords, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		N/A
27.4	No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal		N/A
	Parts providing earthing continuity, other than parts of a metal frame or enclosure, have adequate resistance to corrosion		N/A
	If of steel, these parts provided with an electroplated coating, thickness of at least 5 µm		N/A
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		N/A
	In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion		N/A
	In case of doubt, thickness of coating measured as described in ISO 2178 or in ISO 1463		N/A
27.5	Low resistance of connection between earthing terminal and earthed metal parts		P
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided the clearances of basic insulation are based on the rated voltage of the appliance		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Resistance not exceeding 0,1 $\Omega$ at the specified low-resistance test ( $\Omega$ )..... :	0.017	P
27.6	The printed conductors of printed circuit boards not used to provide earthing continuity in hand-held appliances		N/A
	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit		N/A
<b>28</b>	<b>SCREWS AND CONNECTIONS</b>		-
28.1	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses		P
	Screws not of soft metal liable to creep, such as zinc or aluminium		N/A
	Diameter of screws of insulating material min. 3 mm		P
	Screws of insulating material not used for any electrical connections or connections providing earthing continuity		N/A
	Screws used for electrical connections or connections providing earthing continuity screwed into metal		N/A
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		N/A
	For type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw impairs basic insulation		N/A
	For screws and nuts; torque-test as specified in Table 14..... :	(See appended table)	P
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure is not transmitted through non-ceramic insulating material liable to shrink or distort, unless		N/A
	there is resiliency in the metallic parts to compensate for shrinkage or distortion of the insulating material		N/A
	This requirement does not apply to electrical connections in circuits of appliances for which:		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- 30.2.2 is applicable and that carry a current not exceeding 0,5 A		N/A
	- 30.2.3 is applicable and that carry a current not exceeding 0,2 A		N/A
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N/A
	Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread		N/A
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N/A
	Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection:		N/A
	- in normal use,		N/A
	- during user maintenance,		N/A
	- when replacing a supply cord having a type X attachment, or		N/A
	- during installation		N/A
	At least two screws being used for each connection providing earthing continuity, unless		N/A
	the screw forms a thread having a length of at least half the diameter of the screw		N/A
28.4	Screws and nuts that make mechanical connection secured against loosening by means such as spring washer, lock washers and crown type locks, if they also make electrical connections or connections providing earthing continuity		N/A
	For screw connections not subjected to torsion, sealing compound that softens on heating allowed to be used to provide security against loosening		N/A
	This requirement does not apply to screws in the earthing circuit if at least two screws are used, or		N/A
	if an alternative earthing circuit is provided		N/A
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if the connections are subjected to torsion		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	If connections subjected to torsion, a rivet having a non-circular shank or an appropriate notch allowed to be used to secure against loosening		N/A
<b>29</b>	<b>CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION</b>		-
	Clearances, creepage distances and solid insulation withstand electrical stress		P
	For coatings used on printed circuits boards to protect the microenvironment (type 1) or to provide basic insulation (type 2), normative Annex J applies .....		N/A
	The microenvironment is pollution degree 1 under type 1 protection		N/A
	For type 2 protection, the spacing between the conductors before the protection is applied is not less than the values specified in Table 1 of IEC 60664-3:2016		N/A
	These values apply to functional, basic, supplementary and reinforced insulation..... :		N/A
29.1	Clearances not less than the values specified in Table 16, taking into account the rated impulse voltage for the overvoltage categories of Table 15, unless..... :	(See appended table)	P
	for basic insulation and functional insulation, they comply with the impulse voltage test of clause 14		P
	For appliances intended for use at altitudes exceeding 2 000 m, the clearances in Table 16 are increased according to the altitude correction factor in Table A.2 of IEC 60664-1:2007		N/A
	However, the impulse voltage test is not applicable if the construction is such that the distances could be affected by any of the following:		N/A
	- distortion		N/A
	- movement of parts		N/A
	- assembly of parts		N/A
	- wear of basic insulation		N/A
	- wear of functional insulation		N/A
	In this case, the clearances for rated impulse voltages of 1 500 V and above specified in Table 16 are increased by 0,5 mm		N/A
	Impulse voltage test is not applicable:		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- when the microenvironment is pollution degree 3, or		N/A
	- for basic insulation of class 0 and class 0I appliances, or		N/A
	- to appliances intended for use at altitudes exceeding 2 000 m		N/A
	Appliances are in overvoltage category II		N/A
	A force of 2 N is applied to bare conductors, other than heating elements		N/A
	A force of 30 N is applied to accessible surfaces		N/A
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		N/A
	The values of Table 16 or the impulse voltage test of clause 14 are applicable..... :	(See appended table)	N/A
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1,0 mm, if the microenvironment is pollution degree 1		N/A
	Lacquered conductors of windings considered to be bare conductors		N/A
29.1.2	Clearances of supplementary insulation not less than those spec. for basic insulation in Table 16.. :	(See appended table)	N/A
29.1.3	Clearances of reinforced insulation not less than those specified in Table 16, using the next higher step for rated impulse voltage..... :	(See appended table)	N/A
	For double insulation, with no intermediate conductive part between basic and supplementary insulation, clearances are measured between live parts and the accessible surface, and the insulation system is treated as reinforced insulation		N/A
29.1.4	Clearances for functional insulation are the largest values determined from:		N/A
	- Table 16 based on the rated impulse voltage..... :	(See appended table)	N/A
	- Table F.7a in IEC 60664-1:2007, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4:2005, frequency exceeding 30 kHz		N/A
	If values of Table 16 are largest, the impulse voltage test of clause 14 may be applied instead, unless		N/A
	the microenvironment is pollution degree 3, or		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	the distances can be affected by wear, distortion, movement of the parts or during assembly		N/A
	However, clearances are not specified if the appliance complies with clause 19 with the functional insulation short-circuited		N/A
	Lacquered conductors of windings considered to be bare conductors		N/A
	However, clearances at crossover points are not measured		N/A
	Clearance between surfaces of PTC heating elements may be reduced to 1 mm		N/A
29.1.5	Appliances having higher working voltages than rated voltage, clearances for basic insulation are the largest values determined from:		N/A
	- Table 16 based on the rated impulse voltage..... :		N/A
	- Table F.7a in IEC 60664-1:2007, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4:2005, frequency exceeding 30 kHz		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1:2007 or Clause 4 of IEC 60664-4:2005, the clearances of supplementary insulation are not less than those specified for basic insulation		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1:2007, the clearances of reinforced insulation dimensioned as specified in Table F.7a are to withstand 160 % of the withstand voltage required for basic insulation		N/A
	If clearances for basic insulation are selected from Clause 4 of IEC 60664-4:2005, the clearances of reinforced insulation are twice the value required for basic insulation		N/A
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in Table 16, but using the next lower step for rated impulse voltage		N/A
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation are based on the working voltage used as the rated voltage in Table 15		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree..... :	(See appended table)	P
	Pollution degree 2 applies, unless		P
	- precautions taken to protect the insulation; pollution degree 1		N/A
	- insulation subjected to conductive pollution; pollution degree 3		N/A
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
	In a double insulation system, the working voltage for both the basic and supplementary insulation is taken as the working voltage across the complete double insulation system		P
29.2.1	Creepage distances of basic insulation not less than specified in Table 17..... :	(See appended table)	N/A
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from Table 2 of IEC 60664-4:2005, these values being used if exceeding the values in Table 17..... :		N/A
	Except for pollution degree 1, corresponding creepage distance not less than the minimum specified for the clearance in Table 16, if the clearance has been checked according to the test of clause 14..... :		N/A
29.2.2	Creepage distances of supplementary insulation at least those specified for basic insulation in Table 17, excluding NOTE 1 and NOTE 2, or..... :	(See appended table)	N/A
	Table 2 of IEC 60664-4:2005, as applicable..... :		N/A
29.2.3	Creepage distances of reinforced insulation at least double those specified for basic insulation in Table 17, excluding NOTE 1 and NOTE 2, or..... :	(See appended table)	N/A
	Table 2 of IEC 60664-4:2005, as applicable..... :		N/A
29.2.4	Creepage distances of functional insulation not less than specified in Table 18..... :	(See appended table)	N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from Table 2 of IEC 60664-4:2005, these values being used if exceeding the values in Table 18.....:		N/A
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		N/A
29.3	Supplementary and reinforced insulation have adequate thickness, or a sufficient number of layers, to withstand the electrical stresses		N/A
	Compliance checked:		N/A
	- by measurement, in accordance with 29.3.1, or		N/A
	- by an electric strength test in accordance with 29.3.2, or		N/A
	- for insulation, other than single layer internal wiring insulation, by an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3, and		N/A
	for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or		N/A
	- by an assessment of the thermal quality of the material according to 29.3.3 combined with an electric strength test in accordance with 23.5, for each single layer internal wiring insulation touching each other, or		N/A
	- as specified in subclause 6.3 of IEC 60664-4:2005 for insulation that is subjected to any periodic voltage having a frequency exceeding 30 kHz		N/A
29.3.1	Supplementary insulation; thickness at least 1 mm		N/A
	Reinforced insulation; thickness of at least 2 mm		N/A
29.3.2	Each layer of material withstands the electric strength test of 16.3 for supplementary insulation		N/A
	Supplementary insulation consists of at least 2 layers		N/A
	Reinforced insulation consists of at least 3 layers		N/A
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		N/A
	the electric strength test of 16.3		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	If the temperature rise during the tests of clause 19 does not exceed the value specified in Table 3, the test of IEC 60068-2-2 is not carried out		N/A
29.3.4	Thickness of accessible parts of reinforced insulation consisting of a single layer not less than specified in Table 19..... :		N/A
<b>30</b>	<b>RESISTANCE TO HEAT AND FIRE</b>		-
30.1	External parts of non-metallic material,		P
	parts supporting live parts, and		P
	parts of thermoplastic material providing supplementary or reinforced insulation		N/A
	sufficiently resistant to heat		N/A
	This requirement does not apply to:		N/A
	- the insulation or sheath of flexible cords or internal wiring		N/A
	- those parts of coil formers that do not support or retain terminals in position		N/A
	- parts of ceramic material		N/A
	Ball-pressure test according to IEC 60695-10-2		P
	External parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (°C)..... :	(See appended table 30.1)	N/A
	Parts supporting live parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 125 °C, whichever is the higher; temperature (°C)..... :	(See appended table 30.1)	P
	Parts of thermoplastic material providing supplementary or reinforced insulation tested at 25 °C plus the maximum temperature rise determined during clause 19, if higher; temperature (°C)..... :	(See appended table 30.1)	N/A
30.2	Parts of non-metallic material resistant to ignition and spread of fire		N/A
	This requirement does not apply to:		N/A
	- parts of a mass not exceeding 0,5 g, provided the cumulative effect is unlikely to propagate flames that originate inside the appliance by propagating flames from one part to another, or		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		N/A
	Compliance checked by the test of 30.2.1, and in addition:		P
	- for attended appliances, 30.2.2 applies		N/A
	- for unattended appliances, 30.2.3 applies		P
	For appliances for remote operation, 30.2.3 applies		N/A
	For parts of appliances connected to the supply mains during charging, 30.2.3 applies		N/A
	For base material of printed circuit boards, 30.2.4 applies		N/A
30.2.1	Parts of non-metallic material subjected to the glow-wire test of IEC 60695-2-11:2014 at 550 °C	(See appended table 30.2)	N/A
	However, test not carried out if the material is classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 550 °C, or		N/A
	the material is classified at least HB40 according to IEC 60695-11-10		N/A
	Parts for which the glow-wire test cannot be carried out need to meet the requirements in ISO 9772 for material classified HBF		N/A
30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2		P
	The tests are not applicable to conditions as specified..... :		P
30.2.3.1	Parts of non-metallic material supporting connections, such as switch contacts and the like in other components, carrying a current exceeding 0,2 A during normal operation, and		P
	parts of non-metallic material, other than small parts, within a distance of 3 mm,		P
	subjected to the glow-wire test of IEC 60695-2-11:2014 with a test severity of 850 °C	(See appended table 30.2)	P
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 850 °C		P

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
30.2.3.2	Parts of non-metallic material supporting connections, such as switch contacts and the like in other components, and		P
	parts of non-metallic material within a distance of 3 mm,		P
	subjected to the glow-wire test of IEC 60695-2-11:2014 with appropriate severity level:	(See appended table 30.2)	P
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		P
	- 650 °C, for other connections		N/A
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	However, the glow-wire test of 750 °C or 650 °C as appropriate, is not carried out on parts of material fulfilling both or either of the following classifications:		N/A
	- a glow-wire ignition temperature according to IEC 60695-2-13 of at least:		N/A
	<ul style="list-style-type: none"> <li>775 °C, for connections carrying a current exceeding 0,2 A during normal operation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>675 °C, for other connections</li> </ul>		N/A
	- a glow-wire flammability index according to IEC 60695-2-12 of at least:		N/A
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		N/A
	- comprise material having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- comprise material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of normative Annex E, or		N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
	The consequential needle-flame test of Annex E applied to non-metallic parts that encroach within the vertical cylinder placed above the centre of the connection zone and on top of the non-metallic parts supporting current-carrying connections, and parts of non-metallic material within a distance of 3 mm of such connections if these parts are those:		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- parts that withstood the glow-wire test of IEC 60695-2-11:2014 of 750 °C or 650 °C as appropriate, but produce a flame that persist longer than 2 s, or		N/A
	- parts that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts, that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts for which the needle-flame test of normative Annex E was applied, or		N/A
	- small parts for which a material classification of V-0 or V-1 was applied		N/A
	However, the consequential needle-flame test is not carried out on non-metallic parts, including small parts, within the cylinder that are:		N/A
	- parts having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- parts comprising material classified as V-0 or V-1 according to IEC 60695-11-10, or		N/A
	- parts shielded by a flame barrier that meets the needle-flame test of normative Annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
	No battery in the area of the vertical cylinder used for the consequential needle flame test, unless		N/A
	battery shielded by a barrier that meets the needle flame test of normative Annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
30.2.4	Base material of printed circuit boards subjected to the needle-flame test of normative Annex E	(See appended table 30.2/30.2.4)	N/A
	Test not applicable to conditions as specified..... :		N/A
<b>31</b>	<b>RESISTANCE TO RUSTING</b>		-
	Relevant ferrous parts adequately protected against rusting		N/A
	Tests specified in part 2 when necessary		N/A
<b>32</b>	<b>RADIATION, TOXICITY AND SIMILAR HAZARDS</b>		-

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
32.1	Appliance does not emit harmful radiation or present a toxic or similar hazard due to their operation in normal use		N/A
	Compliance is checked by the limits or tests specified in part 2, if relevant		N/A
32.2	Appliance do not present an optical radiation hazard due to their operation in normal use		N/A
	Requirement does not apply to lamps and lamp systems that comply with 24.1.10		N/A
	Compliance checked as follows, appliance supplied at rated voltage:		N/A
	- Radiation assessment at or recalculated to 200 mm distance or at fixed use distance, measurement as described in IEC 62471:2006		N/A
	- For lamps or lamp systems intended to illuminate objects, tested at the GLS assessment distance producing 500 lux as described in IEC 62471:2006		N/A
	- Appliance complies with exempt group classification requirements of IEC 62471:2006 regarding actinic ultraviolet hazard (E <sub>s</sub> ) and near-UV hazard (E <sub>UVA</sub> )		N/A
<b>A</b>	<b>ANNEX A (INFORMATIVE) ROUTINE TESTS</b>		-
	Description of routine tests to be carried out by the manufacturer		N/A
<b>B</b>	<b>ANNEX B (NORMATIVE) BATTERY-OPERATED APPLIANCES, SEPARABLE BATTERIES AND DETACHABLE BATTERIES FOR BATTERY-OPERATED APPLIANCES</b>		-
	The following modifications to this standard are applicable to:		N/A
	- battery-operated appliances and remote controls employing non-rechargeable batteries (primary batteries)		N/A
	- battery-operated appliances and remote controls employing rechargeable batteries (secondary batteries)		N/A
	- detachable and separable batteries for battery-operated appliances		N/A
B.3.1.1	Battery-operated appliance operated under the following conditions:		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- for appliances operated with detachable or separable batteries disconnected from the appliance for charging, appliance operated to perform its intended function with a fully charged battery, the battery being the model or type reference of the battery provided or indicated in the instructions		N/A
	- for appliances operated with integral or separable batteries not disconnected from the appliance for charging, and that cannot perform their intended function while batteries are being charged, appliance operated to perform its intended function with a fully charged battery		N/A
	- for appliances operated with replaceable batteries, including integral replaceable batteries, or non-rechargeable batteries, appliance operated to perform its intended function with the artificial source described in B5.3, upper limit short circuit current capacity specified in Table B.1		N/A
B.3.6.1	Non-rechargeable battery: battery is supplied in a fully charged state and cannot be recharged after		N/A
5.2	Tests of B.19.1 to B.19.6 may be carried out on separate samples		N/A
5.8.1	This subclause is not applicable		N/A
5.8.2	This subclause is not applicable		N/A
5.8.3	This subclause is not applicable		N/A
5.8.4	This subclause is not applicable		N/A
B.5.1	Before starting a test requiring a fully charged battery, battery fully charged, disconnected from source and allowed to rest between 2 h and 6 h		N/A
B.5.2	Specification of a rated voltage implies the use of a fully charged battery		N/A
	For battery-operated appliances, where the supply terminal connecting the battery have no indication of polarity, the more unfavourably polarity applied, unless		N/A
	such a connection unlikely to occur due to the construction of the appliance		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
B.5.3	When specified that a battery provided with or intended for the appliance may be replaced by an artificial source, that source consists of a DC power supply or a specially constructed battery, output of each as described in Table B.1 for the relevant battery type		N/A
6.1	Battery-operated appliances without a supply connection or a functional earth connection not classified with respect to protection against electric shock		N/A
7.1	Battery-operated appliances and remote controls containing batteries marked with the:		N/A
	- name, trademark or identification mark of the manufacturer or responsible vendor		N/A
	- model or type reference		N/A
	- IP number according to degree of protection against ingress of water, other than IPX0.....:		N/A
	- type reference of the battery, if battery either not recharged in the appliance or non-rechargeable		N/A
	Appliances incorporating replaceable batteries marked with:		N/A
	- battery type reference		N/A
	- battery voltage (V).....:		N/A
	- polarity of the terminals, unless		N/A
	incorrect insertion of battery by the user unlikely to occur due to the construction of the appliance		N/A
	If more than one battery type can be used with the appliance, appliance marked with the type reference of at least one of the battery types that can be used, together with:		N/A
	- symbol ISO 7000-0790 (2004-01), or		N/A
	- the substance of the following:		N/A
	See instruction manual for additional battery types.		N/A
	If appliances use more than one battery, appliance marked to indicate correct polarity connection of the batteries		N/A
	If relevant, positive terminal indicated by symbol IEC 60417-5005 (2002-10), and		N/A
	negative terminal indicated by symbol IEC 60417-5006 (2002-10)		N/A
	Detachable and separable batteries marked with:		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- name, trade mark or identification mark of the manufacturer or responsible vendor		N/A
	- model or type reference		N/A
	- IP number according to degree of protection against ingress of water, other than IPX0.....:		N/A
	Detachable and separable batteries disconnected from the appliance for charging the battery marked with:		N/A
	- symbol ISO 7000-0790 (2004-01)		N/A
	- symbol IEC 60417-6413 (2019-05)		N/A
	- model or type reference of the battery charger, or the substance of the following:		N/A
	Use only with <model or type reference> battery charger.....:		N/A
	If more than one battery charger can be used to charge a detachable and separable battery disconnected from the appliance for charging, battery marked with the type reference of at least one of the battery charges that can be used, together with		N/A
	either symbol ISO 7000-0790 (2004-01), or the substance of the following:		N/A
	See instruction manual for additional battery chargers.		N/A
	Batteries that are user replaceable, other than general purpose batteries, marked with the:		N/A
	- name, trademark or identification mark of the manufacturer or responsible vendor		N/A
	- model or type reference		N/A
	- nominal voltage (V).....:		N/A
7.6	Additional symbols		N/A
7.12	Instructions provided with the appliance		N/A
	For appliances intended for use at altitudes exceeding 2 000 m, maximum altitude stated		N/A
	If necessary, appropriate details on precautions during user maintenance stated		N/A
	The instructions state the substance of the following:		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.		N/A
	For appliances incorporating batteries intended to be removed for charging or intended to be replaced by the user and that can be contained in the small parts cylinder, the instructions state the substance of the following:		N/A
	WARNING: Keep out of reach of children. Swallowing can lead to chemical burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion. Seek medical attention immediately.		N/A
	For appliances intended for use with batteries that use metal-ion chemistries, the instructions state the normal temperature range for charging		N/A
	For battery-operated appliances, the instructions contain the following information, as applicable:		N/A
	- battery type		N/A
	- details regarding safe disposal of used batteries		N/A
	- how to deal with leaking batteries		N/A
	For battery-operated appliances, the instructions contain the substance of the following:		N/A
	- do not expose the appliance or battery to excessive temperatures		N/A
	- be aware of the risk of terminals of the battery-operated appliance or battery being short-circuited by metal objects		N/A
	For battery-operated appliances containing non-rechargeable batteries, the instructions state the substance of the following:		N/A
	This appliance contains non-rechargeable batteries, these batteries are not to be recharged.		N/A
	For battery-operated appliances containing non-user-replaceable batteries, the instructions state the substance of the following:		N/A
	This appliance contains batteries that are only replaceable by skilled persons.		N/A
	For battery-operated appliances containing non-replaceable batteries, the instructions state the substance of the following:		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	This appliance contains batteries that are non-replaceable. When the battery is at end of life, the appliance shall be properly disposed of.		N/A
	For battery-operated appliances incorporating batteries intended to be removed for charging or replaced by the user, the instructions include, as applicable, the substance of the following:		N/A
	- rechargeable batteries are to be removed from the appliance before being charged		N/A
	- different types of batteries or new and used batteries are not to be mixed		N/A
	- exhausted batteries are to be removed from the appliance and safely disposed of		N/A
	- if the appliance is to be stored unused for a long period, the batteries should be removed		N/A
	- do not use non-rechargeable batteries in place of rechargeable batteries		N/A
	- do not use modified or damaged batteries		N/A
	For battery-operated appliances incorporating batteries intended to be removed for charging or replaced by the user, the instructions include, as applicable, the following information:		N/A
	- battery type reference		N/A
	- orientation of the battery with regard to polarity		N/A
	- method of replacing batteries including maintaining correct polarity		N/A
	For battery-operated appliances incorporating batteries intended to be removed prior to disposal of the appliance, the instructions include details regarding their safe removal and disposal		N/A
	For battery-operated appliances that use detachable and separable batteries disconnected from the appliance for charging, the instructions include the model or type reference of the battery charger to be used, along with the substance of the following:		N/A
	WARNING: Use only with <model or type reference> battery charger.		N/A
	If the symbol for battery charger is used, its meaning is explained		N/A
7.15	Markings specified for batteries intended to be replaced by the user are in or adjacent to the battery compartment		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Marking to indicate correct polarity connection of the batteries specified for appliances using more than one general purpose battery is in or adjacent to the battery compartment		N/A
	Type reference of battery charger placed next to symbol IEC 60417-6413 (2019-05)		N/A
8	This clause is not applicable to the appliance functional part of a battery-operated appliance and its batteries, providing the battery circuits do not have an earth or mains connection		N/A
10.1	This subclause is not applicable		N/A
10.2	This subclause is not applicable		N/A
11.1	Battery operated appliances, their surroundings, and batteries not attaining excessive temperatures in normal use		N/A
	Compliance tested under the conditions specified in B.11.1, 11.2, 11.3, 11.7 and 11.8		N/A
11.4	This subclause is not applicable		N/A
11.5	This subclause is not applicable		N/A
11.6	This subclause is not applicable		N/A
B.11.1	Battery-operated appliances tested under the conditions of normal operation		N/A
	For appliances operated with detachable or separable batteries disconnected for charging, appliance operated until depletion of battery and test repeated with fully charged battery until it depletes or until temperature rises have stabilized as specified, whichever occurs first		N/A
	For appliances incorporating integral or separable batteries not disconnected for charging, and that cannot perform while batteries are being charged, appliance operated until depletion of batteries		N/A
	For appliances operated with replaceable or non-rechargeable batteries, appliance operated until the minimum capacity of the battery as specified in Table B.1 has been delivered or until steady conditions are established, whichever occurs first		N/A
19.1	For battery-operated appliances, instead of the tests specified, tests of 19.2, 19.4, 19.7, 19.9, 19.11, 19.12, 19.14, 19.15, B.19.1 to B.19.5		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Detachable and separable batteries also subjected to the test of B.19.6		N/A
	For battery-operated appliances, tests carried out under normal operation		N/A
19.2	Appliances with heating elements tested under the conditions specified in Clause 11 but with restricted heat dissipation		N/A
19.7	Battery-operated appliance switched on and operated under stalled conditions by:		N/A
	- locking the rotor of appliances for which the locked rotor torque is smaller than the full load torque		N/A
	- locking moving parts of other appliances		N/A
	If an appliance has more than one motor, test carried out for each motor separately		N/A
	Test conducted at both $I_{sc}$ (high) and $I_{sc}$ (low), if testing with the artificial source described in B.5.3		N/A
	Test conducted:		N/A
	- until the test sample achieves a steady condition, including returning to room temperature, or		N/A
	- until at a time period of at least 3 h has elapsed		N/A
19.11	Electronic circuits checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless they comply with the conditions specified in 19.11.1		N/A
	Appliances having a device with an off position obtained by electronic disconnection, or a device that can place the appliance in a stand-by mode, subjected to the tests of 19.11.4		N/A
	If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, test of 19.12 carried out, and		N/A
	the appliance complies with the conditions specified in 19.13		N/A
	If a conductor of a printed circuit board becomes open-circuited, the appliance is considered to have withstood the particular test, provided that the base material of the printed circuit board withstands the test of normative Annex E		N/A
19.11.2	When any of the fault conditions simulated, duration of test until steady conditions		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or a device that can be placed in the stand-by mode, subjected to the tests of 19.11.4.1 and 19.11.4.2		N/A
	Tests carried out with the appliance supplied by a fully charged battery, the device being set in the off position or in the stand-by mode		N/A
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 and 19.11.4.2		N/A
	Tests carried out after the protective electronic circuit has operated during the relevant tests of Clause 19 except 19.2 and 19.11.3		N/A
19.11.4.8	Battery operated appliances are supplied with a fully charged battery, operated under normal operation for 60 s, and then subjected to a 60 s interruption of the battery current		N/A
	When battery current restored, the appliance:		N/A
	- continues to operate normally from the same operation cycle point reached before the battery supply was interrupted, or		N/A
	- does not continue operating without requiring manual intervention to restart from the same operating cycle point reached before the battery supply was interrupted, or		N/A
	- does not continue operating without requiring manual intervention to restart from the part of the cycle selected by the user		N/A
19.13	During tests, no flames, molten metal or poisonous or ignitable gas in hazardous amounts and temperature rises not exceeding the values shown in Table 9..... :		N/A
	No explosion or ignition of the battery during or after the test		N/A
	Venting of cells permitted through their vents		N/A
	After the tests, and when the appliance has cooled to room temperature, compliance with B.22.3 and B.22.5 not impaired and the appliance complies with 20.2 and Clause 29, if still operable		N/A
	For appliances immersed in or filled with conducting liquid in normal use, appliance immersed in or filled with water for 24 h before the test of B.22.5		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	No dangerous malfunction and no failure of protective electronic circuits, if still operable		N/A
	Appliances tested with an electronic switch in the off position:		N/A
	- do not become operational, or		N/A
	- do not result in a dangerous malfunction during or after the tests of 19.11.4, if they become operational		N/A
	In an appliance containing lids or doors controlled by one or more interlocks, one of the interlocks may be released if both of the following conditions are fulfilled:		N/A
	- no movement to an open position when released		N/A
	- no restart after the cycle in which it was released		N/A
19.15	For battery-operated appliances incorporating a manual voltage selector switch intended to select battery voltage, switch set to lowest voltage position and highest voltage applied		N/A
B.19.1	Supply terminals of a battery-operated appliance having an indication of polarity connected to the battery terminals of opposite polarity, unless		N/A
	connection by the user unlikely to occur		N/A
B.19.2	For battery-operated appliances with provision for multiple batteries, one or more of the batteries reversed and appliance operated, if reversal by the user of battery polarity allowed by the construction		N/A
B.19.3	For battery-operated appliances with motor(s), terminals of each motor short circuited one at a time, where the resistance of the short-circuit does not exceed 10 mΩ and while operated under the conditions of Clause 11		N/A
	Test conducted until steady conditions are achieved, including returning to room temperature or until a time period of at least 3 h		N/A
B.19.4	Test conducted with all the cells of the battery fully charged and, for batteries consisting of more than one cell, one cell fully discharged on a detachable or separable battery connected to the appliance or on an appliance containing an integral battery		N/A
	Main discharge connections of the battery shorted with a resistance not to exceed 10 mΩ, conducted until a non-self-resetting protection device operates or an intentionally weak part becomes permanently open-circuited or until the test sample returns to room temperature		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
B.19.5	Battery-operated appliance and any cords except supply cords, as appropriate, tested with the battery connected, under the following fault conditions applied one at a time:		N/A
	- any cord provided between the battery-operated appliance and a separable battery is short-circuited at the point along its length likely to produce the most adverse effects		N/A
	- for appliances having replaceable batteries that are replaceable and that can be removed without the aid of a tool, and having terminals that can be short-circuited by a thin straight bar, the terminals of the battery are short-circuited		N/A
	- charging terminals of the battery-operated appliance that are simultaneously accessible with the test probe 13 of IEC 61032 are short circuited so as to produce the most unfavourable result		N/A
	Battery-operated appliance switched on and no additional mechanical load applied		N/A
	Tests conducted until the test sample achieves a steady condition, including returning to room temperature or, until a time period of at least 3 h		N/A
	Resistance of short circuit not exceeding 10 mΩ		N/A
B.19.6	For detachable and separable batteries, combinations of terminals simultaneously accessible by applying the test probe 13 of IEC 61032 short circuited so as to produce the most unfavourable result		N/A
B.20.1	The enclosure of a battery-operated appliance incorporating an integral battery that uses metal-ion chemistry withstands the pressure generated when a cell vents during failure		N/A
	Compliance checked by inspection after the tests of Clause 19 for batteries with a capacity less than 0,2 Ah, and measurement or test as specified		N/A
B.20.2	The enclosure of detachable and separable batteries that use metal-ion chemistries withstands the pressure generated when a cell vents during failure; tests as specified		N/A
	Compliance checked by inspection after the tests of Clause 19 for batteries with a capacity less than 0,2 Ah, and measurement or test as specified		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.1	Battery-operated appliances have adequate mechanical strength and are constructed to withstand rough handling expected in normal use		N/A
	Appliance fitted with fully charged batteries and rigidly supported subjected to test Ehb of IEC 60068-2-75, three blows of 0,5 J applied to every point of the appliance enclosure likely to be weak		N/A
	If necessary, blows also applied to handles, levers, knobs and similar parts and to signal lamps and their covers, but only if the lamps or covers protrude from the enclosure by more than 10 mm or if their surface area exceeds 4 cm <sup>2</sup>		N/A
	Lamps within the appliance and their covers only tested if likely to be damaged in normal use		N/A
	When applying the release cone to the guard of a visibly glowing heating element, the hammer head passing through the guard does not strike the heating element		N/A
	In case of doubt, defect neglected and the group of three blows applied to the same place on a new sample which then withstands the test		N/A
	Hand-held battery-operated appliances also subjected to test free-fall - procedure 1, of IEC 60068-2-31, under the specified conditions		N/A
	Free-fall test does not cause the appliance to catch fire, leak fluid visible from the outside or explode and meets the requirements of Clause 20, Clause 29, B.22.3 and B.22.5 where short circuit of functional insulation will impair compliance with this standard		N/A
B.21.1	Separable and detachable batteries, when not connected to the appliance, have adequate mechanical strength and are constructed to withstand rough handling expected in normal use		N/A
	Fully charged battery, rigidly supported, subject to test Ehb of IEC 60068-2-75, three blows of 0,5 J applied to every point of the battery enclosure likely to be weak		N/A
	In case of doubt, defect neglected and the group of three blows applied to the same place on a new sample which then withstands the test		N/A
	Detachable and separable batteries subjected to the test free-fall - procedure 1, of IEC 60068-2-31, under the conditions as specified		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Free-fall test does not damage the battery or cause it to catch fire, leak fluid visible from the outside or explode and meets the requirements of Clause 20, Clause 29, B.22.4 and B.22.5 where short circuit of functional insulation will impair compliance with this standard		N/A
	For batteries using metal-ion chemistry:		N/A
	- open circuit voltage of the battery 24 h after the tests not less than 90 % of the voltage measured immediately prior to the tests		N/A
	- cells only vented through their vents		N/A
22.11	Non-detachable parts that protect against electric shock, moisture or contact with moving parts reliably are fixed and withstand the mechanical stress occurring during normal use		N/A
	Snap-in devices used for fixing such parts have an obvious locked position		N/A
	Fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing reliable		N/A
22.20	Direct contact between current carrying parts and thermal insulation that would impair compliance with this standard effectively prevented, unless		N/A
	such material is noncorrosive, non-hygroscopic and non-combustible		N/A
	Not applicable to glass-wool thermal insulation		N/A
22.24	Not applicable to battery-operated appliances that do not contain parts requiring protection against simultaneous contact according to B.22.3		N/A
22.25	Not applicable to battery-operated appliances that do not contain parts requiring protection against simultaneous contact according to B.22.3		N/A
22.26	This subclause is not applicable		N/A
22.27	This subclause is not applicable		N/A
22.28	This subclause is not applicable		N/A
22.29	This subclause is not applicable		N/A
22.30	This subclause is not applicable		N/A
22.31	This subclause is not applicable		N/A
22.32	This subclause is not applicable		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
22.33	Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with accessible metal parts are not in direct contact with current carrying parts or unearthed metal parts that are separated from current carrying parts by basic insulation only or with other current carrying parts such that compliance with B.22.3 and B.22.4 would be impaired		N/A
22.34	This subclause is not applicable		N/A
22.35	This subclause is not applicable		N/A
22.36	This subclause is not applicable		N/A
22.37	This subclause is not applicable		N/A
B.22.1	User accessible interfaces between elements of a battery system (not mains connections) do not employ appliance couplers according to IEC 60320 (all parts) or IEC 60309-2		N/A
	User accessible interfaces between elements of a battery system (not mains connections) do not employ connectors of the following types unless the battery system is adequately protected against the use of an incorrect supply:		N/A
	- barrel connectors with outside diameters of 6,5 mm or less		N/A
	- concentric connectors with a diameter of 3,5 mm or less according to IEC 60603-11		N/A
	Compliance checked by inspection, measurement and for determining adequacy of protection against use of an incorrect supply, by the test as specified		N/A
	Source selected such that its current capability does not limit the charging of the battery		N/A
	During the application of incremental voltages, the appliance is either operating normally or, if not, does not emit flames, molten metal, or poisonous or ignitable gas in hazardous amounts and temperature rises do not exceed the values shown in Table 9		N/A
	No explosion or ignition of the battery during or after the test		N/A
	Venting of cells permitted through their vents		N/A
B.22.2	External surfaces of detachable and separable batteries protected against excessive heat from heat sources (directly or via heated discharge air) present during operation of the appliance		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
B.22.3	Battery-operated appliances so constructed and enclosed that there is adequate protection against simultaneous contact with two or more conductive parts where the:		N/A
	- voltage between them exceeds 42,4 V		N/A
	- current between the conductive parts exceeds 2 mA for DC or 0,7 mA peak for when ripple exceeds 10 %		N/A
	Compliance checked with test probe B and test probe 18 of IEC 61032 as described		N/A
	Detachable parts except lamps behind a detachable cover removed during the tests with test probe B, however		N/A
	during insertion or removal of lamps located behind a detachable cover, protection against simultaneous contact with parts having a voltage between them exceeding 42,4 V ensured		N/A
	During the tests with test probe 18, appliance fully assembled as in normal use, no parts removed		N/A
	However, test probe 18 not applied to appliances for commercial use, unless		N/A
	intended to be installed in an area open to the public		N/A
	Not possible to touch two or more conductive parts of opposite polarity with the probes if the voltage between them exceeds 42,4 V and the current between them exceeds 2 mA for DC or 0,7 mA peak for when ripple exceeds 10 %		N/A
	Current measured using the circuit in Figure 4 of IEC 60990:2016		N/A
B.22.4	Separable and detachable batteries so constructed and enclosed that there is adequate protection against simultaneous contact with two or more conductive parts where the:		N/A
	- voltage between them exceeds 42,4 V		N/A
	- current between the conductive parts exceeds 2 mA		N/A
	Compliance checked with test probe B and test probe 18 of IEC 61032 as described		N/A
	During the tests with:		N/A
	- test probe B, all detachable parts removed		N/A
	- test probe 18, no parts removed		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	However, test probe 18 not applied to appliances for commercial use, unless		N/A
	intended to be installed in an area open to the public		N/A
	Not possible to touch two or more conductive parts of opposite polarity with the probes if the voltage between them exceeds 42,4 V and the current between them exceeds 2 mA		N/A
	Current measured using the circuit in Figure 4 of IEC 60990:2016		N/A
B.22.5	Insulating materials providing protection against simultaneous contact with two or more conductive parts are adequate when:		N/A
	- they are within 1,0 mm of the conductive parts		N/A
	- the voltage between the conductive parts exceeds 42,4 V peak		N/A
	- the current between the conductive parts exceeds 2 mA for DC or 0,7 mA peak for when ripple exceeds 10 %		N/A
	Insulating material subjected to voltage test as specified at 750 V or 1,2 times the working voltage plus 700 V, whichever greater, in accordance with IEC 61180 (V).....:		N/A
	No breakdown during the test		N/A
	Current measured using the circuit in Figure 4 of IEC 60990:2016		N/A
B.22.6	Vents of cells not obstructed such that their operation is defeated if venting is relied upon compliance with this standard		N/A
23.3	Instead of the electric strength test of 16.3, battery-operated appliances comply with B.22.3		N/A
23.5	For battery-operated appliances compliance is checked by the test of B.22.5		N/A
24.1	Batteries are not required to comply with IEC 62133-1:2017 or IEC 62133-2:2017, they are tested as part of the appliance according to this standard		N/A
24.1.1	This subclause is not applicable		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
24.1.3	Switches in battery-operated appliances have adequate breaking capacity and withstand, without excessive wear or other harmful effect, the mechanical, electrical, and thermal stresses occurring in the battery-operated appliance		N/A
	Tests as described and according to the relevant standard for switches, IEC 61058-1-1:2016 for mechanical switches and IEC 61058-1-2:2016 for electronic switches		N/A
	Required cycles of operation completed, no electrical or mechanical failure		N/A
	At the end of the tests:		N/A
	- switch contacts operating properly in the "on" and "off" positions		N/A
	- temperature rise of the switch terminals not increased by more than 30 K above the temperature rise measured in Clause 11		N/A
B.24.1	The relevant standards for non-acid based electrolyte cells employed in batteries are IEC 62133-1:2017 for nickel systems and IEC 62133-2:2017 for lithium systems		N/A
	A battery that uses metal-ion chemistry is additionally subjected to the tests of subclauses 7.3.8.1 (vibration) and 7.3.8.2 (mechanical shock) of IEC 62133-2:2017		N/A
25.9	The requirement also applies to interconnection cords of battery-operated appliances		N/A
25.14	The requirement also applies to interconnection cords of battery-operated appliances		N/A
25.15	The requirement also applies to interconnection cords of battery-operated appliances		N/A
B.25.1	Insulated conductors of interconnection cords of battery-operated appliances comply with the requirements for internal wiring and are provided with at least 0,5 mm thick outer sheath made of insulating material equivalent to that of supply cords described in 25.7		N/A
B.26.1	Terminal devices in an appliance for the connection of the flexible leads or flexible cord connecting a separable battery so located or shielded that there is no risk of incorrect connection		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
27.1	The battery-operated appliance does not have a provision for a protective earth but may incorporate a functional earth.		N/A
29.1	Clearances not less than the values specified in Table 16, taking into account the rated impulse voltage		N/A
	For battery-operated appliances, the rated impulse voltage is 500 V for working voltages less than 50 V and 1 500 V for all other working voltages		N/A
	However, if the construction, including between parts of opposite polarity for connecting the battery, is such that the distances could be affected by wear, by distortion, by movement of the parts or during assembly, the clearances for rated impulse voltages of 1 500 V are increased by 0,5 mm and the impulse voltage test is not applicable		N/A
B.29.1.1	For parts requiring protection against simultaneous contact according to B.22.3 and B.22.4, the sum total of the clearances between each of these parts and their nearest accessible surface is not less than two times the Table 16 clearance taking into account the rated impulse voltage		N/A
	For the purpose of this determination, at least one of the clearances is not less than 1,0 mm.		N/A
B.29.2.1	For parts requiring protection against simultaneous contact according to B.22.3 and B.22.4, the sum total of the creepage distances between each of these parts and their nearest accessible surface is not less than two times the Table 17 creepage distances.		N/A
	For the purpose of this determination, at least one of the creepage distances is not less than 1,0 mm		N/A
30.1	External parts of non-metallic material, the deterioration of which might cause the battery-operated appliance, separable battery or detachable battery to fail to comply with this annex, are sufficiently resistant to heat		N/A
<b>C</b>	<b>ANNEX C (NORMATIVE) AGEING TEST ON MOTORS</b>		-
	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N/A
	Test conditions as specified		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
<b>D</b>	<b>ANNEX D (NORMATIVE) THERMAL MOTOR PROTECTORS</b>		-
	Applicable to appliances having motors that incorporate thermal motor protectors necessary for compliance with the standard		N/A
	Test conditions as specified		N/A
<b>E</b>	<b>ANNEX E (NORMATIVE) NEEDLE-FLAME TEST</b>		-
	Needle-flame test carried out in accordance with IEC 60695-11-5:2016, with the following modifications:		N/A
7	Flame application times		N/A
	The duration of application of the test flame is 30 s ± 1 s		N/A
9	Test procedure		N/A
9.2	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of Figure 2		N/A
9.3	The first paragraph does not apply		N/A
	If possible, the flame is applied at least 10 mm from a corner		N/A
9.4	The test is carried out on one specimen		N/A
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test		N/A
11	Evaluation of test results		N/A
	The duration of burning not exceeding 30 s		N/A
	However, for printed circuit boards, the duration of burning not exceeding 15 s		N/A
<b>F</b>	<b>ANNEX F (NORMATIVE) CAPACITORS</b>		-
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14:2013 including IEC 60384-14:2013/AMD1:2016, with the following modifications:		N/A
1.5	Terms and definitions		N/A
1.5.3	Class X capacitors tested according to subclass X2		N/A
1.5.4	Class Y capacitors tested according to subclass Y2		N/A
1.6	Marking		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Items a) and b) are applicable		N/A
3.4	Approval testing		N/A
3.4.3.2	Table 3 is applicable as described		N/A
4.1	Visual examination and check of dimensions		N/A
	This subclause is applicable		N/A
4.2	Electrical tests		N/A
4.2.1	This subclause is applicable		N/A
4.2.5	This subclause is applicable		N/A
4.2.5.2	Only Table 11 is applicable		N/A
	Values for test A apply		N/A
	However, for capacitors in heating appliances the values for test B or C apply		N/A
4.12	Damp heat, steady state		N/A
	This subclause is applicable		N/A
	Only insulation resistance and voltage proof are checked		N/A
4.13	Impulse voltage		N/A
	This subclause is applicable		N/A
4.14	Endurance		N/A
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 are applicable		N/A
4.14.7	Only insulation resistance and voltage proof are checked		N/A
	No visible damage		N/A
4.17	Passive flammability test		N/A
	This subclause is applicable		N/A
4.18	Active flammability test		N/A
	This subclause is applicable		N/A
<b>G</b>	<b>ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS</b>		-
	The following modifications to this standard are applicable for safety isolating transformers:		N/A
7	Marking and instructions		N/A
7.1	Transformers for specific use marked with the:		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- name, trademark or identification mark of the manufacturer or responsible vendor.....:		N/A
	- model or type reference.....:		N/A
17	Overload protection of transformers and associated circuits		N/A
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1:2017		N/A
22	Construction		N/A
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6:2009 are applicable		N/A
29	Clearances, creepage distances and solid insulation		N/A
29.1, 29.2, 29.3	The distances specified in Table 20, Table 21 and Table 22 of IEC 61558-1:2017 apply		N/A
	For insulated winding wires complying with subclause 19.12.3 of IEC 61558-1:2017 there are no requirements for clearances or creepage distances		N/A
	For windings providing reinforced insulation, the distances specified in Table 20 and Table 21 of IEC 61558-1:2017 are not assessed		N/A
	For safety isolating transformers subjected to periodic voltages with a frequency exceeding 30 kHz, the clearances, creepage distances and solid insulation values specified in IEC 60664-4:2005 are applicable, if greater than the values specified in Table 20, Table 21 and Table 22 of IEC 61558-1:2017		N/A
<b>H</b>	<b>ANNEX H (NORMATIVE) SWITCHES</b>		-
	Switches comply with the following clauses of IEC 61058-1:2016 and IEC 61058-1-1:2016, as modified below:		N/A
	The tests carried out under the conditions occurring in the appliance		N/A
	Before being tested, switches are operated 20 times without load		N/A
8	Marking and documentation		N/A
	Switches are not required to be marked		N/A
	However, a switch that can be tested separately from the appliance marked with the manufacturer's name or trademark and the type reference		N/A
13	Mechanism		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	The tests can be carried out on a separate sample		N/A
15	Insulation resistance and dielectric strength		N/A
15.1	Not applicable		N/A
15.2	Not applicable		N/A
15.3	Applicable for full disconnection and micro-disconnection, test carried out immediately after the humidity test of subclause 15.3 of IEC 60335-1		N/A
17	Endurance		N/A
	Compliance is checked on three separate appliances or switches		N/A
	For 17.5.4 of IEC 61058-1-1:2016, the number of cycles of actuation declared according to 7.4 is 10 000, unless		N/A
	otherwise specified in 24.1.3 of IEC 60335-1..... :		N/A
	Switches for operation under no load and which can be operated only by a tool, and		N/A
	switches operated by hand that are interlocked so that they cannot be operated under load,		N/A
	are not subjected to the tests		N/A
	However, switches without this interlock are subjected to the test of 17.5.4 of IEC 61058-1-1:2016 for 100 cycles of operation		N/A
	Subclauses 17.3 and 17.6.2 of IEC 61058-1-1:2016 not applicable		N/A
	The ambient temperature during the test is that occurring in the appliance during the test of Clause 11 in IEC 60335-1		N/A
	The temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1 (K)..... :		N/A
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies		N/A
	Clause 20 of IEC 61058-1:2016 is applicable to clearances across full disconnection and micro-disconnection		N/A
	It is also applicable to creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in Table 14		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
<b>I</b>	<b>ANNEX I (NORMATIVE) MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE</b>		-
	The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:		N/A
8	Protection against access to live parts		N/A
8.1	Metal parts of the motor are considered to be bare live parts		N/A
11	Heating		N/A
11.3	The temperature rise of the body of the motor is determined instead of the temperature rise of the windings		N/A
11.8	The temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in Table 3 for the relevant insulating material		N/A
16	Leakage current and electric strength		N/A
16.3	Insulation between live parts of the motor and its other metal parts is not subjected to the test		N/A
19	Abnormal operation		N/A
19.1	The tests of 19.7 to 19.9 are not carried out		N/A
I.19.1	Appliance operated at rated voltage with each of the following fault conditions:		N/A
	- short circuit of the terminals of the motor, including any capacitor incorporated in the motor circuit		N/A
	- short circuit of each diode of the rectifier		N/A
	- open circuit of the supply to the motor		N/A
	- open circuit of any parallel resistor, the motor being in operation		N/A
	Only one fault simulated at a time, the tests carried out consecutively		N/A
22	Construction		N/A
I.22.1	For class I appliances incorporating a motor supplied by a rectifier circuit, the DC circuit being insulated from accessible parts of the appliance by double or reinforced insulation		N/A
	Compliance checked by the tests specified for double and reinforced insulation		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
<b>J</b>	<b>ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS</b>		-
	Protective coatings of printed circuit boards comply with IEC 60664-3:2016 with the following modifications:		N/A
5.1	General		N/A
	When production samples are used, three samples of the printed circuit board are tested		N/A
5.7.2	Cold conditioning		N/A
	The test is carried out at -25 °C		N/A
5.7.4	Rapid change of temperature		N/A
	Severity 1 is specified, the number of cycles is 5		N/A
5.7.5.2	Additional conditioning with respect to electromigration		N/A
	The test duration is 10 days		N/A
5.9	Additional tests		N/A
	This subclause is not applicable		N/A
<b>K</b>	<b>ANNEX K (INFORMATIVE) OVERVOLTAGE CATEGORIES</b>		-
	The information on overvoltage categories is extracted from IEC 60664-1:2007		P
	Overvoltage category is a numeral defining a transient overvoltage condition		P
	Equipment of overvoltage category IV is for use at the origin of the installation		N/A
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N/A
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		P
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N/A
	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriately low level		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
<b>L</b>	<b>ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES</b>		-
	Information for the determination of clearances and creepage distances		P
<b>M</b>	<b>ANNEX M (INFORMATIVE) POLLUTION DEGREE</b>		-
	The information on pollution degrees is extracted from IEC 60664-1:2007		P
	Pollution		P
	The microenvironment determines the effect of pollution on the insulation, taking into account the macroenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar		N/A
	Minimum clearances specified where pollution may be present in the microenvironment		N/A
	Degrees of pollution in the microenvironment		P
	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:		P
	- pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence		N/A
	- pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected		P
	- pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected		N/A
	- pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow		N/A
<b>N</b>	<b>ANNEX N (NORMATIVE) PROOF TRACKING TEST</b>		-
	The proof tracking test is carried out in accordance with IEC 60112:2003 including IEC 60112:2003/AMD1:2009 with the following modifications:		P
7	Test apparatus		P
7.3	Test solutions		P

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Test solution A is used		P
10	Determination of proof tracking index (PTI)		P
10.1	Procedure		P
	Proof voltage of 100 V, 175 V, 400 V or 600 V.....:	175 V	P
	The test is carried out on five specimens		P
	In case of doubt, additional test with proof voltage reduced by 25 V, the number of drops increased to 100		P
10.2	Report		P
	The report states if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V		P
<b>O</b>	<b>ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30</b>		-
	Description of tests for determination of resistance to heat and fire		N/A
<b>P</b>	<b>ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN TROPICAL CLIMATES</b>		-
	Modifications applicable for class 0 and 0I appliances having a rated voltage exceeding 150 V, intended to be used in countries having a tropical climate and that are marked with symbol IEC 60417-6332 (2015-06)		N/A
	Modifications may also be applied to class I appliances having a rated voltage exceeding 150 V, intended to be used in countries having a tropical climate and that are marked with symbol IEC 60417-6332 (2015-06), if liable to be connected to a supply mains that excludes the protective earthing conductor		N/A
5.7	The ambient temperature for the tests of clauses 11 and 13 is 40 +3/0 °C		N/A
7.1	The appliance marked with symbol IEC 60417-6332 (2015-06)		N/A
7.6	Symbol IEC 60417-6332 (2015-06)		N/A
7.12	The instructions state that the appliance is to be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30 mA		N/A
	The instructions state that the appliance is considered to be suitable for use in countries having a tropical climate, but may also be used in other countries		N/A
	If symbol IEC 60417-6332 (2015-06) is used, its meaning is explained		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
11.8	The values of Table 3 are reduced by 15 K		N/A
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
15.3	The value of t is 37 °C		N/A
16.2	The leakage current for class I appliances not exceeding 0,5 mA (mA)..... :		N/A
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N/A
<b>Q</b>	<b>ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS</b>		-
	Description of tests for appliances incorporating electronic circuits		N/A
<b>R</b>	<b>ANNEX R (NORMATIVE) SOFTWARE EVALUATION</b>		-
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2 validated in accordance with the requirements of this annex		N/A
R.1	Programmable electronic circuits using software		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard		N/A
R.2	Requirements for the architecture		N/A
R.2.1	General		N/A
R.2.1.1	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2 use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software		N/A
R.2.1.2	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.2 have one of the following structures:		N/A
	- single channel with periodic self-test and monitoring		N/A
	- dual channel (homogenous) with comparison		N/A
	- dual channel (diverse) with comparison		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.1 have one of the following structures:		N/A
	- single channel with functional test		N/A
	- single channel with periodic self-test		N/A
	- dual channel without comparison		N/A
R.2.2	Measures to control faults/errors		N/A
R.2.2.1	When redundant memory with comparison is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area		N/A
R.2.2.2	Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison		N/A
R.2.2.3	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths		N/A
R.2.2.4	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in Table R.1 and R.2 as appropriate		N/A
R.2.2.5	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2, detection of a fault/error occurs before compliance with clause 19 or 24.102.1 is impaired (IEC 60335-2-21)		N/A
	For appliances intended for remote communication through public networks, where normative Annex U is applicable as determined by 22.62, detection of a fault/error occurs before compliance with normative Annex U is impaired		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
R.2.2.6	The software is referenced to relevant parts of the operating sequence and the associated hardware functions		N/A
R.2.2.7	Labels used for memory locations are unique		N/A
R.2.2.8	The software is protected from user alteration of safety-related segments and data		N/A
R.2.2.9	Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 or 24.102.1 is impaired (IEC 60335-2-21)		N/A
	For appliances intended for remote communication through public networks where normative Annex U is applicable as determined by 22.62, the software and safety-related hardware under its control is initialized and terminates before compliance with normative Annex U is impaired		N/A
R.3	Measures to avoid errors		N/A
R.3.1	General		N/A
	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2, the following measures to avoid systematic faults in the software are applied		N/A
	Software that incorporates measures used to control the fault/error conditions specified in Table R.2 is inherently acceptable for software required to control the fault/error conditions specified in Table R.1		N/A
R.3.2	Specification		N/A
R.3.2.1	Software safety requirements:	Software Id:	N/A
	The specification of the software safety requirements includes the descriptions listed		N/A
R.3.2.2	Software architecture		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
R.3.2.2.1	The specification of the software architecture includes the aspects listed - techniques and measures to control software faults/errors (refer to R.2.2); - interactions between hardware and software; - partitioning into modules and their allocation to the specified safety functions; - hierarchy and call structure of the modules (control flow); - interrupt handling; - data flow and restrictions on data access; - architecture and storage of data; - time-based dependencies of sequences and data	Document ref. No:	N/A
R.3.2.2.2	The architecture specification is validated against the specification of the software safety requirements by static analysis		N/A
R.3.2.3	Module design and coding		N/A
R.3.2.3.1	Based on the architecture design, software is suitably refined into modules		N/A
	Software module design and coding is implemented in a way that is traceable to the software architecture and requirements		N/A
	The module design specifies:		N/A
	- function(s)		N/A
	- interfaces to other modules		N/A
	- data		N/A
R.3.2.3.2	Software code is structured		N/A
R.3.2.3.3	Coded software is validated against the module specification by static analysis		N/A
	The module specification is validated against the architecture specification by static analysis		N/A
R.3.3	Software validation		N/A
	The software is validated with reference to the requirements of the software safety requirements specification		N/A
	Compliance is checked by simulation of:		N/A
	- input signals present during normal operation		N/A
	- anticipated occurrences		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- undesired conditions requiring system action		N/A
R.3.4	Management items		N/A
R.3.4.1	Management of software versions		N/A
	A software version management system at the module level is put in place		N/A
R.3.4.2	Software modification		N/A
R.3.4.2.1	Software modifications are based on a modification request which details the following:		N/A
	- the hazards which may be affected		N/A
	- the proposed change		N/A
	- the reasons for change		N/A
R.3.4.2.2	An analysis is carried out to determine the impact of the proposed modification on functional safety		N/A
R.3.4.2.3	A detailed specification for the modification is generated including the necessary activities for verification and validation, such as a definition of suitable test cases		N/A
R.3.4.2.4	The modification is carried out as planned		N/A
R.3.4.2.5	The assessment of the modification is carried out based on the specified verification and validation activities, which may include:		N/A
	- a reverification of changed software modules		N/A
	- a reverification of affected software modules		N/A
	- a revalidation of the complete system		N/A
R.3.4.2.6	All details of modification activities are documented		N/A



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE R.1 – GENERAL FAULT/ERROR CONDITIONS						
Component <sup>a</sup>	Fault/error	Acceptable measures <sup>b, c</sup>	Definitions	Document reference for applied measure	Document reference for applied test	Verdict
1 CPU						N/A
1.1 Registers	Stuck at	Functional test, or periodic self-test using either: – static memory test, or – word protection with single bit redundancy	H.2.16.5 H.2.16.6 H.2.19.6 H.2.19.8.2			
1.2 VOID						N/A
1.3 Programme counter	Stuck at	Functional test, or periodic self-test, or independent time-slot monitoring, or logical monitoring of the programme sequence	H.2.16.5 H.2.16.6 H.2.18.10.4 H.2.18.10.2			N/A
2 Interrupt handling and execution	No interrupt or too frequent interrupt	Functional test, or time-slot monitoring	H.2.16.5 H.2.18.10.4			N/A
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics/ sub-harmonics only)	Frequency monitoring, or time slot monitoring	H.2.18.10.1 H.2.18.10.4			N/A
4 Memory						N/A
4.1 Invariable memory	All single bit faults	Periodic modified checksum, or multiple checksum, or word protection with single bit redundancy	H.2.19.3.1 H.2.19.3.2 H.2.19.8.2			

IEC 60335-2-21						
Clause	Requirement + Test		Result - Remark			Verdict
4.2 Variable memory	DC fault	Periodic static memory test, or Word protection with single bit redundancy	H.2.19.6 H.2.19.8.2			N/A
4.3 Addressing (relevant to variable and invariable memory)	Stuck at	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
5 Internal data path	Stuck at	Word protection with single bit redundancy	H.2.19.8.2			N/A
5.1 VOID						N/A
5.2 Addressing	Wrong address	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
6 External communication 6.1 Data	Data corruption of up to Hamming distance 3	Word protection with multi-bit redundancy, or CRC – single word, or transfer redundancy, or protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14			N/A
6.2 Addressing	Wrong address	Word protection with multi-bit redundancy including the address, or CRC – single word including the address, or transfer redundancy, or protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14			N/A
6.3 Timing	Wrong point in time  Wrong sequence	Time-slot monitoring, or scheduled transmission  Logical monitoring, or time-slot monitoring, or scheduled transmission	H.2.18.10.4 H.2.18.18  H.2.18.10.2 H.2.18.10.4 H.2.18.18			N/A
7 Input/output periphery	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N/A

IEC 60335-2-21						
Clause	Requirement + Test		Result - Remark			Verdict
7.1 VOID						N/A
7.2 Analog I/O						N/A
7.2.1 A/D and D/A converter	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			
7.2.2 Analog multiplexer	Wrong addressing	Plausibility check	H.2.18.13			N/A
8 VOID						N/A
9 Custom chips <sup>d</sup> e.g. ASIC, GAL, gate array	Any output outside the static and dynamic functional specification	Periodic self-test	H.2.16.6			N/A
NOTE A Stuck-at fault model denotes a fault model representing an open circuit or a non-varying signal level. A DC fault model denotes a stuck-at fault model incorporating short circuits between signal lines.						
<sup>a</sup> For fault/error assessment, some components are divided into their sub-functions. <sup>b</sup> For each sub-function in the table, the Table R.2 measure will cover the software fault/error. <sup>c</sup> Where more than one measure is given for a sub-function, these are alternatives. <sup>d</sup> To be divided as necessary by the manufacturer into sub-functions.						

**TABLE R.2 – SPECIFIC FAULT/ERROR CONDITIONS**

Component <sup>a</sup>	Fault/error	Acceptable measures <sup>b, c</sup>	Definitions	Document reference for applied measure	Document reference for applied test	Verdict
------------------------	-------------	-------------------------------------	-------------	--	-------------------------------------	---------

IEC 60335-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
1 CPU 1.1 Registers	DC fault	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or internal error detection, or redundant memory with comparison, or periodic self-tests using either – walkpat memory test – Abraham test – Transparent GALPAT test; or word protection with multi-bit redundancy, or static memory test and word protection with single bit redundancy	H.2.18.15 H.2.18.3 H.2.18.9 H.2.19.5 H.2.19.7 H.2.19.1 H.2.19.2.1 H.2.19.8.1 H.2.19.6 H.2.19.8.2			N/A
1.2 Instruction decoding and execution	Wrong decoding and execution	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or internal error detection, or periodic self-test using equivalence class test	H.2.18.15 H.2.18.3 H.2.18.9 H.2.18.5			N/A
1.3 Programme counter	DC fault	Periodic self-test and monitoring using either: – independent time-slot and logical monitoring – internal error detection, or comparison of redundant functional channels by either: – reciprocal comparison – independent hardware comparator	H.2.16.7 H.2.18.10.3 H.2.18.9 H.2.18.15 H.2.18.3			N/A

IEC 60335-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
1.4 Addressing	DC fault	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator; or internal error detection; or periodic self-test using – a testing pattern of the address lines; or – a full bus redundancy – a multi bus parity including the address	H.2.18.15 H.2.18.3 H.2.18.9 H.2.16.7 H.2.18.22 H.2.18.1.1 H.2.18.1.2			N/A
1.5 Data paths instruction decoding	DC fault and execution	Comparison of redundant CPUs by either: – reciprocal comparison, or – independent hardware comparator, or – internal error detection, or – periodic self-test using a testing pattern, or – data redundancy, or – multi-bit bus parity	H.2.18.15 H.2.18.3 H.2.18.9 H.2.16.7 H.2.18.2.1 H.2.18.1.2			N/A
2 Interrupt handling and execution	No interrupt or too frequent interrupt related to different sources	Comparison of redundant functional channels by either – reciprocal comparison, – independent hardware comparator, or – independent time-slot and logical monitoring	H.2.18.15 H.2.18.3 H.2.18.10.3			N/A
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics/ sub-harmonics only)	Frequency monitoring, or time-slot monitoring, or comparison of redundant functional channels by either: – reciprocal comparison – independent hardware comparator	H.2.18.10.1 H.2.18.10.4 H.2.18.15 H.2.18.3			N/A

IEC 60335-2-21						
Clause	Requirement + Test		Result - Remark			Verdict
4 Memory						N/A
4.1 Invariable memory	99,6 % coverage of all information errors	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or redundant memory with comparison, or periodic cyclic redundancy check, either – single word – double word, or word protection with multi-bit redundancy	H.2.18.15 H.2.18.3 H.2.19.5 H.2.19.4.1 H.2.19.4.2 H.2.19.8.1			
4.2 Variable memory	DC fault and dynamic cross links	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or redundant memory with comparison, or periodic self-tests using either: – walkpat memory test – Abraham test – transparent GALPAT test, or word protection with multi-bit redundancy	H.2.18.15 H.2.18.3 H.2.19.5 H.2.19.7 H.2.19.1 H.2.19.2.1 H.2.19.8.1			N/A
4.3 Addressing (relevant to variable and invariable memory)	DC fault	Comparison of redundant CPUs by either: – reciprocal comparison, or – independent hardware comparator, or full bus redundancy testing pattern, or periodic cyclic redundancy check, either: – single word – double word, or word protection with multi-bit redundancy including the address	H.2.18.15 H.2.18.3 H.2.18.1.1 H.2.18.22 H.2.19.4.1 H.2.19.4.2 H.2.19.8.1			N/A

IEC 60335-2-21						
Clause	Requirement + Test		Result - Remark			Verdict
5 Internal data path 5.1 Data	DC fault	Comparison of redundant CPUs by either – reciprocal comparison – independent hardware comparator, or word protection with multi-bit redundancy including the address, or data redundancy, or testing pattern, or protocol test	H.2.18.15 H.2.18.3 H.2.19.8.1 H.2.18.2.1 H.2.18.22 H.2.18.14			N/A
5.2 Addressing	Wrong address and multiple addressing	Comparison of redundant CPUs by: – reciprocal comparison – independent hardware comparator, or word protection with multi-bit redundancy, including the address, or full bus redundancy; or testing pattern including the address	H.2.18.15 H.2.18.3 H.2.19.8.1 H.2.18.1.1 H.2.18.22			N/A
6 External communication 6.1 Data	Data corruption of up to Hamming distance 4	CRC – double word, or data redundancy or comparison of redundant functional channels by either – reciprocal comparison; or – independent hardware comparator	H.2.19.4.2 H.2.18.2.1 H.2.18.15 H.2.18.3			N/A

IEC 60335-2-21						
Clause	Requirement + Test		Result - Remark			Verdict
6.2 Addressing	Wrong address and multiple addressing	CRC – double word, including the address, or full bus redundancy of data and address, or comparison of redundant communication channels by either: – reciprocal comparison; or – independent hardware comparator	H.2.19.4.2 H.2.18.1.1  H.2.18.15 H.2.18.3			N/A
6.3 Timing	Wrong point in time  Wrong sequence	Time-slot and logical monitoring, or comparison of redundant communication channels by either: – reciprocal comparison; or – independent hardware comparator Time-slot and logical monitoring, or comparison of redundant communication channels by either: – reciprocal comparison; or – independent hardware comparator	H.2.18.10.3  H.2.18.15 H.2.18.3  H.2.18.10.3  H.2.18.15 H.2.18.3			N/A
7 Input/output periphery 7.1 Digital I/O	Fault conditions specified in 19.11.2	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or input comparison, or multiple parallel outputs, or output verification, or testing pattern, or code safety	H.2.18.15 H.2.18.3  H.2.18.8 H.2.18.11 H.2.18.12 H.2.18.22 H.2.18.2			N/A



IEC 60335-2-21						
Clause	Requirement + Test		Result - Remark			Verdict
7.2 Analog I/O 7.2.1 A/D and D/A converter	Fault conditions in 19.11.2	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or input comparison, or multiple parallel outputs, or output verification, or testing pattern	H.2.18.15 H.2.18.3 H.2.18.8 H.2.18.11 H.2.18.12 H.2.18.22			N/A
7.2.2 Analog multiplexer	Wrong addressing	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or input comparison or testing pattern	H.2.18.15 H.2.18.3 H.2.18.8 H.2.18.22			N/A
8 Monitoring devices and comparators	Any output outside the static and dynamic functional specification	Tested monitoring, or redundant monitoring and comparison, or error recognizing means	H.2.18.21 H.2.18.17 H.2.18.6			N/A
9 Custom chips <sup>d</sup> e.g. ASIC, GAL, gate array	Any output outside the static and dynamic functional specification	Periodic self-test and monitoring, dual channel (diverse) with comparison, or error recognizing means	H.2.16.7 H.2.16.2 H.2.18.6			N/A
NOTE A DC fault model denotes a stuck-at fault model incorporating short circuits between signal lines.						
<sup>a</sup> For fault/error assessment, some components are divided into their sub-functions. <sup>b</sup> For each sub-function in the table, the software measure will cover the Table R.1 fault/error. <sup>c</sup> Where more than one measure is given for a sub-function, these are alternatives. <sup>d</sup> To be divided as necessary by the manufacturer into sub-functions.						

<b>S</b>	<b>ANNEX S (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD ON MEASUREMENT OF POWER INPUT AND CURRENT BASED ON THE REQUIREMENTS OF 10.1 AND 10.2 CONCERNING THE REPRESENTATIVE PERIOD</b>	<b>-</b>
----------	--	----------

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Flowchart giving guidance on measurement of power input and current concerning the representative period		N/A
<b>T</b>	<b>ANNEX T (NORMATIVE) UV-C RADIATION EFFECT ON NON-METALLIC MATERIALS</b>		-
	This annex provides requirements for non-metallic materials subject to direct or reflected UV-C radiation (100 nm to 280 nm) exposure and whose mechanical and electrical properties are relied upon for compliance with this standard		N/A
	This annex does not apply to glass, ceramic and similar materials		N/A
	The conditioning and tests are carried out on non-metallic material specimens prepared according to the relevant standard for the test method		N/A
	The conditioning apparatus and test procedure are as specified in ISO 4892-1 and ISO 4892-2		N/A
	<b>Modifications to the clauses of ISO 4892-1:2016:</b>		N/A
5.1	Irradiance		N/A
5.1.1	The UV-C emitter is a low pressure mercury lamp with a quartz envelope having a continuous spectral irradiance of 10 W/m <sup>2</sup> at 254 nm		N/A
5.2	Temperature		N/A
5.2.5	The black-panel temperature is 63 °C ± 3 °C		N/A
5.3	Humidity and wetting		N/A
5.3.1	Humidification of the chamber air is specified in part 2 when necessary		N/A
9	Test report		N/A
	This clause is not applicable		N/A
	<b>Modifications to the clauses of ISO 4892-2:2013:</b>		N/A
7	Procedure		N/A
7.1	General		N/A
	At least three test specimens of each non-metallic material providing mechanical support or impact resistance are exposed in each run		N/A
	Ten samples of the insulated internal wiring are exposed in each run		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	When the internal wiring is provided in more than one colour, the colour having the heaviest organic pigment loading is used		N/A
7.2	Mounting the test specimens		N/A
	The specimens are attached to the specimen holders such that they are not subject to any applied stress		N/A
7.3	Exposure		N/A
	Before placing the specimens in the test chamber, the apparatus is operating under the specified exposure conditions and programmed to operate continuously, conditions are maintained throughout the exposure		N/A
	The test specimens and, if used, the irradiance-measuring instrument are exposed for 1 000 h		N/A
7.4	Measurement of radiant exposure		N/A
	If used, a radiometer is mounted and calibrated such that it measures the irradiance at the exposed surface of the test specimen		N/A
7.5	Determination of changes in properties after exposure		N/A
	The non-metallic material properties and test methods for parts providing mechanical support or impact resistance are specified in Table T.1		
	The non-metallic material properties and test method for electrical insulation of internal wiring are specified in Table T.2		N/A
8	Exposure report		N/A
	This clause is not applicable		N/A
<b>U</b>	<b>ANNEX U (NORMATIVE) APPLIANCES INTENDED FOR REMOTE COMMUNICATION THROUGH PUBLIC NETWORKS</b>		-
	The measures given in this annex are intended to avoid unauthorized access and the effects of transmission failures via remote communication through public networks, where compliance with this standard could be impaired		N/A
	However, in general, it does not cover aspects concerning confidentiality of data and consumer privacy		N/A
U.1	Terms and definitions		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
U.1.1	Definitions relating to remote functionality		N/A
	Definitions used in this appendix as described		N/A
U.2	Marking and instructions		N/A
U.2.1	If there is provision for software download, instructions are provided on how or where to obtain the unique name or code given by the manufacturer, that identifies the current version of the software running in the appliance		N/A
	The instructions also include the necessary steps the user must follow for the software update procedure		N/A
U.3	Construction		N/A
U.3.1	Software enabling communication with a public network is partitioned into modules separate from software which is necessary to comply with the other requirements of this standard		N/A
U.3.2	Remote communication is established, implemented and terminated by the appliance via software that provides:		N/A
	- data integrity protection concerning:		N/A
	• data corruption		N/A
	• address corruption		N/A
	• wrong timing or sequence		N/A
	• permanent "auto-sending" or repetition		N/A
	• interruption of data transfer		N/A
	- means to detect and respond to communication in which, for any reason, a message being communicated is incomplete, truncated, contains errors or has the correct format but delivers information that is outside the range expected for that type of message		N/A
	- measures to control the fault/error conditions specified in Table R.1		N/A
U.3.3	Measures provided to protect against hazards arising from the reception of messages from several sources simultaneously or sequentially		N/A
U.3.4	Remote communication is not enabled prior to authorization		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Authorization is based on authentication using cryptographic techniques to ensure the identity of both parties		N/A
	For the purposes of this requirement, communication between two entities for preparation of the authentication and authorization process is not considered remote communication		N/A
U.3.5	Measures are taken to prevent unauthorized access and to detect transmission faults/errors in the remote communication		N/A
U.3.6	The safe operation of an appliance does not depend on remote communication		N/A
	In case of doubt, remote communication rendered inoperative for the relevant tests of this standard		N/A
U.3.7	Cryptographic techniques are implemented to provide data integrity protection once authorization for remote communication is established		N/A
	Cryptographic techniques employed are part of the appliance including its accessories, do not rely upon part of the router or similar data transmission device, and are performed prior to transmission		N/A
U.3.8	Provisions are taken to ensure that software updates provided by the manufacturer and transmitted to the appliance via remote communication are verified prior to its installation:		N/A
	- against corruption through communication		N/A
	- that the software version is compatible with the appliance for which the software version was designed		N/A
	The software which performs the above-mentioned checks contains measures to control the fault/error conditions specified in Table R.1		N/A
U.3.9	Permission for each installation of software in the appliance is given by the person responsible for the appliance		N/A
	User activation of a mode that enables automatic software updates is permitted		N/A
U.3.10	The installation of software does not impair compliance with the requirements of this standard during or after installation		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
<b>AA</b>	<b>ANNEX AA(NORMATIVE) ADDITIONAL REQUIREMENT FOR IMMERSION HEATER UNITS INTENDED FOR THE INSTALLATION IN HEAT EXCHANGE CLOSED WATER HEATERS (IEC 60335-2-21)</b>		-
	The following requirements of this standard are for immersion heater units intended for the installation in a heat exchange closed water heater. Other subclauses of this standard not mentioned in this annex are applicable. Where "water heater" is written, the requirement applies for "immersion heater units" of this annex.		N/A
5.2	Additional immersion heater units may be required for the tests of Clause 19 and 22.102.		N/A
5.3	The test is to be carried out in a water tank according to the instructions of the manufacturer of the immersion heater unit		N/A
7.1	Immersion heater units for multiple supply shall be marked with their rated power input for each supply circuit.		N/A
	Immersion heater units shall be marked with the rated pressure. The rated pressure shall not be lower than 0,6 MPa.		N/A
7.12.1	The installation instruction shall include the following:		N/A
	– type, the volume or volume range, and dimensions of the tank in which the immersion heater unit can be installed;		N/A
	– the positioning of the immersion heater unit within the tank;		N/A
	– a statement that the installer must check that there is water in the tank before the immersion heater unit is switched on the first time;		N/A
	– that a pressure-relief device is to be installed in the installation, unless it is not already part of the water tank installation;		N/A
	– the type and properties of the pressure-relief device and how to install it;		N/A
	– that a discharge pipe connected to the pressure relief device shall be installed with a steady downward inclination in a frost-free environment.		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	The instructions for immersion heater units for water tanks with an incorporated heat exchanger shall include instructions for the installation of thermal controls and their temperature setting in order to prevent the thermal cut-out from operating due to the heat of the heat exchanger.		N/A
	For water storage tanks without an integrated heat exchanger that may be retrofitted with an immersion heater unit, the instructions shall provide information that retrofitting with an immersion heater unit is possible and shall specify the acceptable immersion heater units.		N/A
19.1	For immersion heater units, the tests of 19.2 and 19.3 are applicable		N/A
19.13	During the test, the immersion heater unit shall not show any leakage.		N/A
22.47	The immersion heater units shall withstand the water pressure occurring in normal use.		N/A
22.101	The rated pressure of immersion heater units intended to be exposed directly to the water main shall be at least 0,6 MPa.		N/A
22.111	Void		N/A
AA.22.2	The immersion heater unit shall not be able to be removed from the tank without the aid of a tool.		N/A
	The cover of the compartment containing the supply terminals shall be prevented from rotating by more than 180° with respect to the fixed part of the immersion heater unit.		N/A
24.102	The thermal cut-out shall operate before the water temperature exceeds 99 °C and the water temperature shall not exceed the opening temperature of the thermal cut-out by more than 20 K.		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

10.1	TABLE: Power input deviation					P
Input deviation of/at:	P rated (W)	P measured (W)	$\Delta P$	Required $\Delta P$	Remark	
230 V, 50 Hz	2000	1988	-0.60%	+5%, -10%	pass	
230 V, 60 Hz	2000	1977	-1.15%	+5%, -10%	pass	
Supplementary information:						

10.2	TABLE: Current deviation					N/A
Current deviation of/at:	I rated (A)	I measured (A)	$\Delta I$	Required $\Delta I$	Remark	
Supplementary information:						

11.8	TABLE: Heating Test , thermocouple measurements		P
	Test voltage (V)..... :	$(240/230)^2 \times 1.15 \times 2000=2504$	—
	Ambient (°C).....:	23.2	—
Thermocouple locations		Max. temperature rise measured, ΔT (K)	Max. temperature rise limit, ΔT (K)
Supply cord		3.8	50
Breaker		1.1	30
Switch ta		1.6	30
Enclosure		2.3	35
Terminal block		15.4	cl.30.1
PCB		22.7	cl.30.1
Internal wire		20.1	55
Tested corner		1.4	90
Water		63.6	73
Supplementary information:			



IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

<b>11.8</b>	<b>TABLE: Heating test, resistance method</b>					<b>N/A</b>
	<b>Test voltage (V)..... :</b>					—
	<b>Ambient, t<sub>1</sub> (°C)..... :</b>					—
	<b>Ambient, t<sub>2</sub> (°C)..... :</b>					—
<b>Temperature rise of winding</b>		<b>R<sub>1</sub> (Ω)</b>	<b>R<sub>2</sub> (Ω)</b>	<b>ΔT (K)</b>	<b>Max. ΔT (K)</b>	<b>Insulation class</b>
Supplementary information:						

<b>12</b>	<b>TABLE: Charging of metal-ion batteries</b>						<b>N/A</b>
<b>Battery type</b>	<b>Imbalance</b>	<b>T<sub>meas</sub> (°C)</b>	<b>T<sub>cell</sub> (°C)</b>	<b>T<sub>amb(max)</sub> (°C)</b>	<b>T<sub>amb(min)</sub> (°C)</b>	<b>T<sub>amb(test)</sub> (°C)</b>	
Supplementary information:							
T <sub>meas</sub>		Cell surface temperature measured during the test					
T <sub>cell</sub>		Cell surface temperature specified by the cell manufacturer					
T <sub>amb(max)</sub>		Maximum ambient temperature for charging specified by the manufacturer					
T <sub>amb(min)</sub>		Minimum ambient temperature for charging specified by the manufacturer					
T <sub>amb(test)</sub>		Ambient temperature of the test room during the test					

<b>13.2</b>	<b>TABLE: Leakage current</b>					<b>P</b>
	<b>Heating appliances: 1,15 x rated input (W)..... :</b>			2504		—
	<b>Motor-operated and combined appliances: 1,06 x rated voltage (V)..... :</b>			-		—
<b>Leakage current between:</b>		<b>I (mA)</b>		<b>Max. allowed I (mA)</b>		
L/N and enclosure		0.02		0.75		

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
Supplementary information:			

13.3	TABLE: Dielectric Strength		P
Test voltage applied between:		Test potential applied (V)	Breakdown / flashover (Yes/No)
L/N and enclosure		1000	No
Supplementary information:			

14	TABLE: Transient overvoltages					N/A
Clearance between:	CI (mm)	Required CI (mm)	Rated impulse voltage (V)	Impulse test voltage (V)	Flashover (Yes/No)	
Supplementary information:						

16.2	TABLE: Leakage current		P
	Single phase appliances: 1,06 x rated voltage (V).....:	1.06 × 240 V	—
	Three phase appliances: 1,06 x rated voltage divided by $\sqrt{3}$ (V).....:	-	—
Leakage current between:		I (mA)	Max. allowed I (mA)
L/N and enclosure		0.033	0.75
Supplementary information:			

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

<b>16.3</b>	<b>TABLE: Dielectric Strength</b>		<b>P</b>
<b>Test voltage applied between:</b>		<b>Test potential applied (V)</b>	<b>Breakdown / flashover (Yes/No)</b>
L/N and enclosure		1250	No
Supplementary information:			

<b>17</b>	<b>TABLE: Overload protection</b>		<b>N/A</b>
	<b>Test voltage (V)..... :</b>		—
	<b>Ambient (°C)..... :</b>		—
<b>Thermocouple locations</b>		<b>Max. temperature rise measured, <math>\Delta T</math> (K)</b>	<b>Max. temperature rise limit, <math>\Delta T</math> (K)</b>
Supplementary information:			

<b>17</b>	<b>TABLE: Overload protection, resistance method</b>					<b>N/A</b>
	<b>Test voltage (V)..... :</b>					—
	<b>Ambient, <math>t_1</math> (°C)..... :</b>					—
	<b>Ambient, <math>t_2</math> (°C)..... :</b>					—
<b>Temperature of winding</b>		<b><math>R_1</math> (<math>\Omega</math>)</b>	<b><math>R_2</math> (<math>\Omega</math>)</b>	<b><math>\Delta T</math> (K)</b>	<b>T (°C)</b>	<b>Max. T (°C)</b>
Supplementary information:						

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

<b>19</b>	<b>TABLE: Abnormal operation conditions</b>						<b>P</b>
<b>Operational characteristics</b>			<b>YES/NO</b>	<b>Operational conditions</b>			
<b>Are there electronic circuits to control the appliance operation?</b>			<b>No</b>	/			
<b>Are there “off” or “stand-by” position?</b>			<b>No</b>	/			
<b>The unintended operation of the appliance results in dangerous malfunction?</b>			<b>No</b>	/			
Sub-clause	Operating conditions description	Test results description	PEC description	EMP 19.11.4	Software type required	19.11.3 PEC	Final result
19.2	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
19.3	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
19.4	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
19.5	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
19.6	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
19.7	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
19.8	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
19.9	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
19.10	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
19.11.2	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
19.11.4.8	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
19.101	See cl. 19.101 detail	No hazard	N.A.	N.A.	N.A.	N.A.	N.A.
Supplementary information:							

<b>19.7</b>	<b>TABLE: Abnormal operation, locked rotor/moving parts</b>						<b>N/A</b>
	<b>Test voltage (V)..... :</b>						<b>—</b>
	<b>Ambient, t<sub>1</sub> (°C)..... :</b>						<b>—</b>
	<b>Ambient, t<sub>2</sub> (°C)..... :</b>						<b>—</b>
<b>Temperature rise of winding</b>		<b>R<sub>1</sub> (Ω)</b>	<b>R<sub>2</sub> (Ω)</b>	<b>ΔT (K)</b>	<b>T (°C)</b>	<b>Max. T (°C)</b>	

IEC 60335-2-21					
Clause	Requirement + Test			Result - Remark	Verdict
Supplementary information:					

<b>19.9</b>	<b>TABLE: Abnormal operation, running overload</b>					<b>N/A</b>
	Test voltage (V)..... :					—
	Ambient, t <sub>1</sub> (°C)..... :					—
	Ambient, t <sub>2</sub> (°C)..... :					—
Temperature rise of winding		R <sub>1</sub> (Ω)	R <sub>2</sub> (Ω)	ΔT (K)	T (°C)	Max. T (°C)
Supplementary information:						

19.13	TABLE: Abnormal operation, temperature rises		N/A
Thermocouple locations		Max. temperature rise measured, ΔT (K)	Max. temperature rise limit, ΔT (K)
Test clause: 19.101			
Test condition: Operated empty at 1,15 times rated power input, short-circuit temperature control			
Test power(W): (240/230) <sup>2</sup> ×1.15×2000W			
Test ambient: t1=24.2°C      t2=24.5°C			
Power cord		18.7	150
Plastic enclosure outside, near heating element		46.6	Cl.30
Test corner		5.4	150
Supplementary information:			

<b>21.1</b>	<b>TABLE: Impact resistance</b>					<b>P</b>
Impacts per surface		Surface tested	Impact energy (Nm)		Comments	
Three times		Plastic enclosure	0.5Nm		No damage	

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
Supplementary information:			

24.1	TABLE: Critical components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>	
Plug	Guangdong Yongrui Cable Technology Co., Ltd.	YR-102	16A, 250V ~	VDE 0620-2-1	VDE: 40023358	
(Alternative)	Sheng Yi Electrical Co., Ltd.	SY-22	16A, 250V ~	VDE 0620-2-1	VDE: 40007744	
(Alternative)	Yuyao Wu Zhou Wire & Cable Co., Ltd.	W-03	16A, 250V ~	VDE 0620-2-1	VDE: 40018659	
(Alternative)	Guangdong Yongneng Cable Co., Ltd.	SP-03	16A, 250V ~	VDE 0620-2-1	VDE: 40032941	
(Alternative)	Foshan Shunde Tianju Electrical Appliance Ind.Co., Ltd.	TJ-003	16A, 250V ~	VDE 0620-2-1	VDE: 40007971	
Power cord	Guangdong Yongrui Cable Technology Co., Ltd.	H05VV-F	3G 1.0 mm <sup>2</sup> or 3G 1.5 mm <sup>2</sup>	EN 50525-2-11 (VDE 0285-525-2-11)	VDE:40021527	
(Alternative)	Sheng Yi Electrical Co., Ltd.	H05VV-F	3G 1.0 mm <sup>2</sup> or 3G 1.5 mm <sup>2</sup>	EN 50525-2-11 (VDE 0285-525-2-11)	VDE:40023272	
(Alternative)	Yuyao Wu Zhou Wire & Cable Co., Ltd.	H05VV-F	3G 1.0 mm <sup>2</sup> or 3G 1.5 mm <sup>2</sup>	EN 50525-2-11 (VDE 0285-525-2-11)	VDE: 124145	
(Alternative)	Jiangmen Brothers Wire & Cable Co., Ltd.	H05VV-F	3G 1.0 mm <sup>2</sup> or 3G 1.5 mm <sup>2</sup>	EN 50525-2-11 (VDE 0285-525-2-11)	VDE:40049949	
(Alternative)	Guangdong Yongneng Cable Co., Ltd.	H05VV-F	3G 1.0 mm <sup>2</sup> or 3G 1.5 mm <sup>2</sup>	EN 50525-2-11 (VDE 0285-525-2-11)	VDE:40022664	

IEC 60335-2-21					
Clause	Requirement + Test		Result - Remark		Verdict
(Alternative)	Foshan Shunde Tianju Electrical Appliance Ind.Co., Ltd.	H05VV-F	3G 1.0 mm <sup>2</sup> or 3G 1.5 mm <sup>2</sup>	EN 50525-2-11 (VDE 0285-525-2-11)	VDE:40007540
Non-self-resetting thermal cut-out	Foshan City Jiulong Machine Co., Ltd	WQS105	250V ~ , 20A, Tf105°C, 1000 cycles, T100, Type 2.B.K	IEC/EN 60730-1 IEC/EN 60730-2-9	CB: CN67486 VDE:40024701
(Alternative)	Changzhou Foland Electrical Appliance Co., Ltd.	WY-S105	AC250V, 20A, Tf105°C 1000 cycles, T100, Type 2.B.K	IEC/EN 60730-1 IEC/EN 60730-2-9	VDE:40000596
Heating element(for all models)	Yuhua Electric Appliances Limited Company Zhaoqin	RGS	220-240VAC, 700W -2000W	IEC/EN 60335-1 IEC/EN 60335-2-21	Tested with appliance
(Alternative)	Guangdong Headway Electric Heating Technology Co.,Ltd.,	HW RGS	220-240 VAC, 700W -2000W	IEC/EN 60335-1 IEC/EN 60335-2-21	Tested with appliance VDE: 40039090
(Alternative)	WuWei HongBo Electric Co.Ltd	RG	220-240 VAC, 700W -2000W	IEC/EN 60335-1 IEC/EN 60335-2-21	Tested with appliance
Internal wire	Jiangyin Tiancheng Electronic Ana Electric Wire Co., Ltd.	H05S-K	300/500V, 180°C, 0.5-1.5 mm <sup>2</sup>	VDE-0282-3 HD22.3 S4	Tested with appliance VDE: 40030867
(Alternative)	Jiangyin Haocheng Electrical Appliances Wire & Cable Co., Ltd.	H05S-K	300/500V, 180°C, 0.5-1.5 mm <sup>2</sup>	VDE-0282-3 HD22.3 S4	Tested with appliance VDE:40017754
(Alternative)	Wuxi Huacheng Cable Co., Ltd.	H05S-K	300/500V, 180°C, 0.5-1.5 mm <sup>2</sup>	VDE-0282-3 HD22.3 S4	Tested with appliance VDE:124381
Fuse-link	XC Electronics(Shen Zhen)Corp. Ltd.	3T	2A, 250V~	IEC/EN 60127-1 IEC/EN 60127-3	VDE :40019614
(Alternative)	Dongguan Better	932	AC 250 V 2A	IEC/EN	VDE :4003

IEC 60335-2-21					
Clause	Requirement + Test			Result - Remark	Verdict
	Electronics Technology Co., Ltd.			60127-1 IEC/EN 60127-3 VDE-0820-1 VDE-0820-3	3369
(Alternative)	XC Electronics (Shen Zhen) Corp. Ltd.,	5TE	AC 250 V 2A	IEC/EN 60127-1 IEC/EN 60127-3 VDE-0820-1 VDE-0820-3	VDE : 40036821
Kaltleiter	Nanjing Shiheng Electronics Co.,Ltd	5D-9	3A ,700VAC	EN 60539-1	TUV:R502 45892
(Alternative)	NANJING SHIHENG ELECTRONICS CO LTD	MF72 5D9	3A ,700VAC	EN60539-1	TUV: R 50245892
Capacitor	Shenzhen Su Rong Capacitors, Co., Ltd.	MPX/MKP X2	0.1~0.33 $\mu$ F, 280V~	EN 60384-14	VDE :400089 24
(Alternative)	Guangdong Fengming Electronic Tech. Co., Ltd.	MKP X2	0.1~0.33 $\mu$ F, 275V~	EN 60384-14	VDE :400257 02
Relay	NINGBO TIANBO GANGLIAN ELECTRONICS CO., LTD	HJR-21FF-S-H	12A, 240VAC Cycles:100000	IEC/EN 61810-1	TUV:R501161 65
(Alternative)	Yueqing Meishuo Electric Co.,Ltd	MPQ4-S-112D-A	30A, 240VAC Cycles:50000	EN 61810-1	TUV:R501849 77
(Alternative)	Xiamen Hongfa Electroacoustic Co., Ltd.	HF2160-1A-12DE	30A, 240VAC Cycles:50000	EN 61810-1	TUV:R501538 35
Varistor	Guangdong Fenghua Advanced Technology Holding Co., Ltd.	FNR-10K561	560V,T105	IEC 61051-1 IEC 61051-2	VDE :400082 42
(Alternative)	Guangdong Fenghua Advanced Technology Holding Co., Ltd.	FNR-14K561	560V,T105	IEC 61051-1 IEC 61051-2	VDE :400082 42



IEC 60335-2-21					
Clause	Requirement + Test		Result - Remark		Verdict
Switch Transformer	DONGGUAN CITY DAZHONG ELECTRONIC CO.,LTD	DZEE16	OUPUT(max):10V A Class B	GB/T 19212.1-2016; GB/T 19212.17-2019	Tested with appliance
(Alternative)	DONGGUAN CITY DAZHONG ELECTRONICS CO., LTD	DZ16003	OUPUT(max):10V A Class B	GB/T 19212.1-2016; GB/T 19212.17-2019	Tested with appliance
(Alternative)	FOSHAN SHUNDE QIANGLI ELECTRICAL CO.,LTD	QLK-EE16	OUPUT(max):10V A Class B	GB/T 19212.1-2016; GB/T 19212.17-2019	Tested with appliance
(Alternative)	FOSHAN SHUNDE JINGWEI ELECTRICAL& ELECTRONICS CO.,LTD	JW16	OUPUT(max):16W Class B	GB 19212.1-2003; GB 19212.18-2006	Tested with appliance
Quick-connect connectors	XIN SHENG TERMINAL MFG LTD	704-BS 704T	250#	IEC 60335-1 IEC 60335-2-21	UL: E177315
PVC tube	Foshan Fangpu Dipping technology Co., LTD.	PSH-10	PVC	IEC/EN 60335-1 IEC/EN 60335-2-21	Tested with appliance
PCB (Electrical insulating materials)	Kingboard (Fogang) Laminates Co. Ltd.	CEM-1-KB-5150	1.6mm	EN 60695-11-10 VDE 0471-11-10	VDE:4004043 3
PCB (Electrical insulating materials)	SHANGHAI GLOBAL ELECTRONIC MATERIAL LTD.,	FR-4	1.6mm	EN 60695-11-10 (VDE 0471-11-10)	VDE:4005380 7
Pressure_relief device	Zhongshan xinshi Electric Appliance Co.,Ltd	A5JNB0.7	0.7 MPa	IEC/EN 60335-1 IEC/EN 60335-2-21	Tested with appliance
Pressure_relief device	Zhejiang Zhuji Zhonghe Machinery Fittings Co.,Ltd	/	0.7 MPa	IEC/EN 60335-1 IEC/EN 60335-2-21	Tested with appliance
Plastic	Guangdong Well-	HI-121H	ABS	IEC/EN 60335-1	Tested

IEC 60335-2-21					
Clause	Requirement + Test			Result - Remark	Verdict
enclosure/ Front cover/ Lamp cover/ Knob/ Bracket of thermostat	born Electric Appliances Co., Ltd			IEC/EN 60335-2-21	with appliance
(Alternative)	Foshan Shunde Jiadeyi Electric Appliance Co., Ltd	HP500P	PP	IEC/EN 60335-1 IEC/EN 60335-2-21	Tested with appliance
Supplementary information:					
1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					

28.1	TABLE: Threaded part torque test			P
Threaded part identification	Diameter of thread (mm)	Column number (I, II, or III)	Applied torque (Nm)	
Fixed enclosure screw	2.91	II	0.5	
Fixed eathing screw	2.90	II	0.5	
Supplementary information:				

IEC 60335-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
29.1	TABLE: Clearances					
	Overvoltage category.....:					—
		Type of insulation:				
Rated impulse voltage (V):	Min. cl (mm)	Basic (mm)	Supplementary (mm)	Reinforced (mm)	Functional (mm)	Verdict / Remark
330	0,2* / 0,5 / 0,8**	--	--	--	--	N/A
500	0,2* / 0,5 / 0,8**	--	--	--	--	N/A
800	0,2* / 0,5 / 0,8**	--	--	--	--	N/A
1 500	0,5 / 0,8** / 1,0***	--	--	--	--	N/A
2 500	1,5 / 2,0***	>2.0mm	>2.0mm	--	>2.0mm	P
4 000	3,0 / 3,5***	--	--	>3.5mm	--	P
6 000	5,5 / 6,0***	--	--	--	--	N/A
8 000	8,0 / 8,5***	--	--	--	--	N/A
10 000	11,0 / 11,5***	--	--	--	--	N/A
Supplementary information:						
*) For tracks on printed circuit boards if pollution degree 1 and 2						
**) For pollution degree 3						
***) If the construction is affected by wear, distortion, movement of the parts or during assembly						

IEC 60335-2-21											
Clause	Requirement + Test						Result - Remark			Verdict	
29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation										P
Working voltage (V)		Creepage distance (mm) Pollution degree									
	1	2			3			Type of insulation			
		Material group			Material group						
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*)	B**)	S**)	R**)	Verdict
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9		—	—	N/A
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9	—		—	N/A
≤50	0,36	1,2	1,7	2,4	3,0	3,4	3,8	—	—		N/A
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4		—	—	N/A
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4	—		—	N/A
125	0,56	1,5	2,1	3,0	3,8	4,2	4,8	—	—		N/A
250	0,56	1,25	1,8	2,5	3,2	3,6	4,0	>4.0	—	—	N/A
250	0,56	1,25	1,8	2,5	3,2	3,6	4,0	—	>4.0	—	N/A
250	1,12	2,5	3,6	5,0	6,4	7,2	8,0	—	—	>8.0	N/A
400	1,0	2,0	2,8	4,0	5,0	5,6	6,3		—	—	N/A
400	1,0	2,0	2,8	4,0	5,0	5,6	6,3	—		—	N/A
400	2,0	4,0	5,6	8,0	10,0	11,2	12,6	—	—		N/A
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0		—	—	N/A
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0	—		—	N/A
500	2,6	5,0	7,2	10,0	12,6	14,2	16,0	—	—		N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0		—	—	N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	—		—	N/A
>630 and ≤800	3,6	6,4	9,0	12,6	16,0	18,0	20,0	—	—		N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5		—	—	N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	—		—	N/A
>800 and ≤1000	4,8	8,0	11,2	16,0	20,0	22,0	25,0	—	—		N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0		—	—	N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	—		—	N/A
>1000 and ≤1250	6,4	10,0	14,2	20,0	25,0	28,0	32,0	—	—		N/A

IEC 60335-2-21											
Clause	Requirement + Test							Result - Remark			Verdict
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0		—	—	N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	—		—	N/A
>1250 and ≤1600	8,4	12,6	18,0	25,0	32,0	36,0	40,0	—	—		N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0		—	—	N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	—		—	N/A
>1600 and ≤2000	11,2	16,0	22,0	32,0	40,0	44,0	50,0	—	—		N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0		—	—	N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	—		—	N/A
>2000 and ≤2500	15,0	20,0	28,0	40,0	50,0	56,0	64,0	—	—		N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0		—	—	N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	—		—	N/A
>2500 and ≤3200	20,0	25,0	36,0	50,0	64,0	72,0	80,0	—	—		N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0		—	—	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	—		—	N/A
>3200 and ≤4000	25,0	32,0	44,0	64,0	80,0	90,0	100,0	—	—		N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0		—	—	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—		—	N/A
>4000 and ≤5000	32,0	40,0	56,0	80,0	100,0	112,0	126,0	—	—		N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0		—	—	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—		—	N/A
>5000 and ≤6300	40,0	50,0	72,0	100,0	126,0	142,0	160,0	—	—		N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0		—	—	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—		—	N/A
>6300 and ≤8000	50,0	64,0	90,0	126,0	160,0	180,0	200,0	—	—		N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0		—	—	N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	—		—	N/A
>8000 and ≤10000	64,0	80,0	112,0	160,0	200,0	220,0	250,0	—	—		N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0		—	—	N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	—		—	N/A
>10000 and ≤12500	80,0	100,0	142,0	200,0	250,0	280,0	320,0	—	—		N/A

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
Supplementary information:			
*) Material group IIIb is allowed if the working voltage does not exceed 50 V			
**) B = Basic insulation, S = Supplementary insulation, R = Reinforced insulation			

29.2	TABLE: Creepage distances, functional insulation							P
Working voltage (V)	Creepage distance (mm) Pollution degree							
	1	2			3			
		Material group			Material group			
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*	Verdict / Remark
≤10	0,08	0,4	0,4	0,4	1,0	1,0	1,0	N/A
50	0,16	0,56	0,8	1,1	1,4	1,6	1,8	N/A
125	0,25	0,71	1,0	1,4	1,8	2,0	2,2	N/A
250	0,42	1,0	1,4	2,0	2,5	2,8	<u>3,2</u>	P
400	0,75	1,6	2,2	3,2	4,0	4,5	5,0	N/A
500	1,0	2,0	2,8	4,0	5,0	5,6	6,3	N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	N/A
Supplementary information:								
*) Material group IIIb is allowed if the working voltage does not exceed 50 V								

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

30.1	TABLE: Ball pressure test of thermoplastics			P
Allowed impression diameter (mm).....:				—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Terminal bock	See table 24.1	125	1.1	
PCB	See table 24.1	125	0.7	
Supplementary information:				

30.2	TABLE: Resistance to heat and fire - Glow wire tests							P
Object/ Part No./ Material	Manufacturer / trademark	Glow wire test (GWT); (°C)						Verdict
		550	650		750		850	
			te	ti	te	ti		
Terminal bock	See table 24.1				0s	0s	X No flame	Pass
PCB	See table 24.1				0s	0s	X No flame	Pass
Object/ Part No./ Material	Manufacturer / trademark	Glow-wire flammability index (GWFI), °C				GW ignition temp. (GWIT), °C		Verdict
		550	650	750	850	675	775	
The test specimen passed the glow wire test (GWT) with no ignition [(te – ti) ≤ 2s] (Yes/No):								Yes
If no, then surrounding parts passed the needle-flame test of annex E (Yes/No)..... :								N/A
The test specimen passed the test by virtue of most of the flaming material being withdrawn with the glow-wire (Yes/No)?.....:								Yes
Ignition of the specified layer placed underneath the test specimen (Yes/No).....:								No

IEC 60335-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

550 °C GWT not relevant (or applicable) to parts of material classified at least HB40 or if relevant HBF  
The GWIT pre-selection option, the 850 °C GWFI pre-selection option, and the 850 °C GWT are not relevant (or applicable) for attended appliances.

30.2/30.2.4 TABLE: Needle-flame test (NFT)					P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
PCB	See table 24.1	30s	No	0s	Pass

Supplementary information:

**NFT not relevant (or applicable) for Parts of material classified as V-0 or V-1**  
**NFT not relevant (or applicable) for Base material of PCBs classified as V-0 or if relevant VTM-0**



**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

<b>ATTACHMENT TO TEST REPORT</b>			
<b>IEC 60335-2-21</b>			
<b>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</b>			
HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES – SAFETY –			
PART 2-21: PARTICULAR REQUIREMENTS FOR STORAGE WATER HEATERS			
<b>Differences according to.....:</b>		EN 60335-2-21:2021 + A1:2021 used in conjunction with EN 60335- 1:2012 + AC:2014 + A11:2014 + A13:2017 + A1:2019 + A14:2019 + A2:2019 + A15:2021 EN 62233:2008 + AC:2008	
<b>TRF template used.....:</b>		IECEE OD-2020-F2:2020, Ed. 1.1	
<b>Attachment Form No.....:</b>		EU_GD_IEC60335_2_21M	
<b>Attachment Originator.....:</b>		Nemko Group AS	
<b>Master Attachment.....:</b>		2022-04-14	
<b>Copyright © 2022 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.</b>			
	<b>CENELEC COMMON MODIFICATIONS (EN)</b>		-
6.1	Delete “class 0” and “class 01”		P
7.1	Single-phase appliances to be connected to the supply mains: 230 V covered		P
	Multi-phase appliances to be connected to the supply mains: 400 V covered		N/A
7.12	The instructions include the substance of the following:		P
	- this appliance can be used by children aged from 3 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved		P
	- children aged from 3 to 8 years are only allowed to operate the tap connected to the water heater		P
	- children shall not play with the appliance		P
	- cleaning and user maintenance shall not be made by children without supervision		P

**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
8.1.1	Also test probe 18 of EN 61032 is applied		P
	The appliance being in every possible position during the test, except that		N/A
	appliances normally used on the floor and having a mass exceeding 40 kg are not tilted		N/A
	The force on the probe in the straight position is increased to 10 N when probe 18 is used		N/A
	When using test probe 18 the appliance is fully assembled as in normal use without any parts removed, and		N/A
	parts intended to be removed for user maintenance are also not removed		N/A
8.1.3	Instead of test probe B, test probe 18 and test probe 13, for appliances other than those of class II, test probe 41 of IEC 61032 is applied with a force not exceeding 1 N to live parts of visibly glowing heating elements, all poles of which can be disconnected by a single switching action		P
8.2	Compliance is checked by inspection and by applying the test probes of EN 61032 in accordance with the conditions specified in 8.1.1		P
	Test probe B and probe 18 of EN 61032 are applied to built-in appliances and fixed appliances only after installation		P
15.1.2	Appliances with an automatic cord reel tested with the cord in the most unfavourable position so that the reeling of the wet cord may affect electrical insulation during operation, the cord not being dried before reeling		N/A
19.2	If there are separate thermostats in the phases of a three-phase water heater with star connection (without neutral), all thermostats are short-circuited simultaneously.		N/A
20.2	For appliances having hazardous moving parts, due to their working function, e.g. the needle of a sewing machine, tools of kitchen machines or the blade of an electrical knife, full protection is not possible for performing their intended use		N/A
	When using a test probe similar to test probe B of EN 61032, having a circular stop face and applied with a force of 5N, the accessories and detachable covers are removed		N/A

**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
	When using test probe 18 it is applied with a force of 2,5N on the appliance fully assembled		N/A
22.12	Other parts intended to be detached during use, maintenance or cleaning (e.g. batteries, battery covers, lids, attachments, steam nozzles) are not considered as parts providing a similar function as handles, knobs, grips, levers		N/A
22.17	The requirement is not applicable to built-in appliances		N/A
22.44	An appliance is child-appealing if one of the following criteria is present:		N/A
	- appliance decorated using faces, cartoon like characters, or similar images		N/A
	- appliance using shapes representing animals, characters, persons or scale models		N/A
	An appliance is child-appealing if more than one of the following criteria are present:		N/A
	- using non-functional light (functional light is e.g. illumination of an object or area, signal indicating status of an appliance)		N/A
	- using non-functional sound (e.g. music)		N/A
	- using non-functional movement		N/A
	If the appliance is child-appealing, has a mass less than 4 kg or is mounted or normally intended for use at a height less than 850 mm, the following conditions shall be met:		N/A
	- surface temperature rise requirements not exceeded		N/A
	- hazardous moving parts not accessible		N/A
	- live parts not accessible		N/A
	- liquid temperature requirement not exceeded,		N/A
	unless for vessels in which two independent and sequential actions are needed to access the liquid		N/A
	- the requirement of 22.12 is applicable for all accessible parts of the appliance		N/A
24.1	Components comply with the safety requirements specified in the relevant EN standards as far as they reasonably apply		P
	Motors are not required to comply with EN 60034-1, but tested as part of the appliance according to this standard		N/A

**Attachment No.1****IEC60335\_2\_210 ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
	Relays are tested as part of the appliance according to this standard		N/A
	Relays may be alternatively tested to EN 60730-1 and the additional requirements in EN 60335-1		N/A
	The requirements of Clause 29 of this standard apply between live parts of components and accessible parts of the appliance		N/A
	Components may comply with the requirements for clearances and creepage distances for functional insulation as specified in the relevant component standard		N/A
	The requirements of 30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections inside components		N/A
	Components that have not been tested and shown to comply with the EN standard for the relevant component are tested according to the requirements of 30.2 of this standard		N/A
	Components that have been tested and shown to comply with the resistance to fire requirements in the EN standard for the relevant component need not be retested provided that:		N/A
	- the severity specified in the component standard is not less than the severity specified in 30.2, and		N/A
	- the test report for the component states the values of $t_e$ and $t_i$ acc. to EN 60695-2-11		N/A
	If the above two conditions are not satisfied, the component is tested as part of the appliance		N/A
	Power electronic converter circuits are not required to comply with EN 62477-1, but tested as part of the appliance according to this standard		N/A
	Unless components have been tested and found to comply with the relevant EN standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		P

**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
	For components mentioned in 24.1.1 to 24.1.9, no additional tests specified in the relevant EN standard for the component are necessary other than those specified in 24.1.1 to 24.1.9		N/A
	Components that have not been tested and found to comply with the relevant EN standard, and		P
	components that are not marked or not used in accordance with their marking,		P
	are tested in accordance with the conditions occurring in the appliance, the number of samples being that required by the relevant standard		N/A
	Lamp-holders and starter-holders that have not been tested and found to comply with the relevant EN standard are tested as a part of the appliance and additionally comply with the gauging and interchangeability requirements of the relevant EN standard under the conditions occurring in the appliance		N/A
	Where the relevant EN standard specifies these gauging and interchangeability requirements at elevated temperatures, the temperatures measured during the tests of Clause 11 are used		N/A
	There are no additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of EN 60320-1 and EN 60309, unless they are specifically mentioned in the text of this standard		P
	Plugs and socket-outlets and other connecting devices of interconnection cords are not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1, or		P
	with connectors and appliance inlets complying with the standard sheets of EN 60320-1, if		N/A
	direct supply to these parts from the supply mains gives rise to a hazard		N/A
	For plugs used in CENELEC countries Annex ZH applies		P

**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
24.Z1	Type S2 and S3 capacitors according to EN 60252-1 are not required to undergo the testing as required by 30.2.2 and 30.2.3.1		N/A
25.1	Plugs and pins for insertion into socket outlets follow the relevant standards sheets in Annex ZH		N/A
25.7	Rubber sheathed cords (60245 IEC 53) are not suitable for appliances intended to be used outdoors, or		N/A
	when they are liable to be exposed to significant amount of ultraviolet radiation		N/A
25.25	Instead of IEC/TR 60083, dimensions of the pins and engagement face of plugs of appliances that are inserted into socket-outlets are in accordance with the dimensions of the relevant plug standard		N/A
	Common plugs and socket-outlets types in CENELEC countries as shown in Annex ZH		N/A
26.11	Conductors connected by soldering are not considered to be positioned or fixed so that reliance is not placed upon the soldering alone to maintain them in position,		N/A
	unless they are held in place near the terminals independently of the solder		N/A
29.3.Z1	Appliance constructed so that if there is a possibility of damaging the insulation during installation, the insulation withstands the scratch and penetration test of 21.2		N/A
32	Compliance regarding electromagnetic fields is checked according to EN 62233		P
Annex I, 19.1.101	The appliance is supplied at rated voltage and operated under normal operation with each of the fault conditions specified		P
	The duration of any of the tests is as specified in 19.7		N/A

<b>ZA</b>	<b>ANNEX ZA (NORMATIVE) SPECIAL NATIONAL CONDITIONS (EN)</b>		N/A
	<b>Denmark, Sweden, Norway and Finland</b>		N/A
7.12.8	The maximum inlet water pressure is at least 1,0 MPa .....		N/A

**Attachment No.1****IEC60335\_2\_210 ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
	<b>Norway</b>		N/A
19.5	The test is also applicable to appliances intended to be permanently connected to fixed wiring		N/A
	<b>Norway</b>		N/A
22.2	The second paragraph of this subclause, dealing with single-phase, permanently connected class I appliances having heating elements, is not applicable due to the supply system		N/A
	<b>Denmark, Finland, Norway and Sweden</b>		N/A
22.101	For closed water heaters, the minimum rated pressure is 1,0 MPa .....		N/A
	<b>Denmark</b>		N/A
22.102	Cold water inlets on the heated storage water heater, the safety valve and the blow out piping have a clear flow diameter of at least Ø 20 mm ...:		N/A
	<b>Denmark</b>		N/A
22.47	The maximum inlet water pressure is at least 1,0 MPa .....		N/A
	<b>Ireland, United Kingdom and Cyprus</b>		N/A
25.8	In the table, the line >10 A and ≤16 A is replaced with:		N/A
	> 10 and ≤ 13 1,25 (1,0) <sup>b</sup>		N/A
	> 13 and ≤ 16 1,5 (1,0) <sup>b</sup>		N/A
<b>ZB</b>	<b>ANNEX ZB (INFORMATIVE) A-DEVIATIONS</b>		N/A
24.101	<b>United Kingdom</b>		N/A

**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
	An unvented water heater is fitted with two independent safety devices, in addition to the thermostat used for normal temperature control. These can be a non-self-resetting thermal cutout and a temperature relief valve according to BS 6283 Part 2 or a combined temperature and pressure relief valve according to BS EN 1490		N/A
24.102	<b>United Kingdom</b>		N/A
	The water temperature of the stored water does at no time exceed 100 °C		N/A
	<b>Ireland</b>		N/A
25.1 and 25.25	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs complying with I.S. 401:1997, or equivalent, to be fitted to domestic appliances		N/A
	<b>United Kingdom</b>		N/A
25.1 and 25.25	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs to BS 1363 to be fitted to domestic appliances.		N/A
	It also allows plugs to BS 4573 and EN 50075 to be fitted to shavers and toothbrushes		N/A
ZC	<b>ANNEX ZC (NORMATIVE)</b> NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS		N/A
	A list of documents referred to in the text of this standard in such a way that some or all of their content constitutes requirements of this document		N/A
<b>ZD</b>	<b>ANNEX ZD (INFORMATIVE)</b> <b>IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS</b>		N/A
	List of IEC and CENELEC code designations for flexible cords		N/A



**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
<b>ZE</b>	<b>ANNEX ZE (INFORMATIVE) SPECIFIC ADDITIONAL REQUIREMENTS FOR APPLIANCES AND MACHINES INTENDED FOR COMMERCIAL USE</b>		N/A
7.1	Business name and full address of the manufacturer and, where applicable, his authorized representative ..... :		N/A
	Model or type reference..... :		N/A
	Serial number, if any		N/A
	Production year		N/A
	Designation of the appliance..... :		N/A
7.12	Instructions provided with the appliance so that the appliance can be used safely		N/A
	The instructions contain at least the following information:		N/A
	- the business name and full address of the manufacturer and, where applicable, his authorized representative		N/A
	- model or type reference of the appliance as marked on the appliance itself, except for the serial number		N/A
	- the designation of the appliance together with its explanation in case it is given by a combination of letters and/or numbers		N/A
	- the general description of the appliance, when needed due to the complexity of the appliance		N/A
	- specific precautions required during installation, operation, adjusting, user maintenance, cleaning, repairing or moving		N/A
	- when needed drawings, diagrams, descriptions and explanations necessary for the safe use and user maintenance of the appliance		N/A
	- the possible reasonably foreseeable misuse and, whenever relevant, a warning against the effects it may have on the safe use of the appliance		N/A
	The words "Original instructions" appear on the language version(s) verified by the manufacturer or by the authorized representative		N/A

**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
	When a translation of the original instructions has been provided by a person introducing the appliance on the market; the meaning of the sentence "Translation of the original instructions" appear in the relevant instructions delivered with the appliance		N/A
	The instructions for maintenance/service to be done by specialized personnel, mandated by the manufacturer or the authorized representative may be supplied in only one Community language which the specialized personnel understand		N/A
	The instructions indicate the type and frequency of inspections and maintenance required for safe operation including the preventive maintenance measures		N/A
7.12.ZE1	If needed for specific appliances, the following information to be given:		N/A
	- on use, transportation, assembly, dismantling when out of service, testing or foreseeable breakdowns, if these operations have consequences on stability of the appliance in order to avoid overturning, falling or uncontrolled movements of the appliance or of its component parts		N/A
	- on how to maintain adequate mechanical stability when in use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N/A
	- on the protective measures to be taken by the user, including, where appropriate, the personal protective equipment to be provided		N/A
	- on the operating method to be followed in the event of accident or breakdown; if a blockage is likely to occur the operating method to safely unblock the appliance		N/A
	- on the specifications on the spare parts to be used, when these affect the health and safety of the operator		N/A
	- on airborne noise emissions, determined and declared in accordance with the relevant Part 2, which includes:		N/A
	- the A-weighted emission sound pressure level at workstations, where this exceeds 70 dB(A)..... ;		N/A

**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
	- where this level does not exceed 70 dB(A), this fact is indicated		N/A
	- the peak C-weighted instantaneous sound pressure value at workstations, where this exceeds 63 Pa (130 dB in relation to 20 µPa)..... :		N/A
	- the A-weighted sound power level emitted by the machinery, where the A-weighted emission sound pressure level at workstations exceeds 80 dB(A)..... :		N/A
7.12.ZE2	The instructions include a warning to disconnect the appliance from its power source during service and when replacing parts		N/A
	If the removal of the plug is foreseen, it is clearly indicated that the removal of the plug is such that an operator can check from any of the points to which he has access that the plug remains removed		N/A
	If this is not possible, due to the construction of the appliance or its installation, a disconnection with a locking system in the isolated position is provided		N/A
19.11.4.8	The appliance continues to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage fluctuation occurred, or		N/A
	a manual operation is required to restart it		N/A
20.1	Appliances and their components and fittings have adequate mechanical stability during transportation, assembly, dismantling and any other action involving the appliance		N/A
20.2	Dangerous moving transmission parts safeguarded either by design or guards		N/A
	When guards are used, they are fixed guards, interlocking movable guards or protective devices		N/A
	Moving parts directly involved in the function of the appliance which cannot be made completely inaccessible fitted with:		N/A
	- fixed guards or interlocking movable guards preventing access to those sections of the parts that are not used in the work, and		N/A
	- adjustable guards restricting access to those sections of the moving parts where access is necessary		N/A

**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
	Interlocking movable guards used where frequent access is required		N/A
21.1	Appliances and their components and fittings have adequate mechanical strength and is constructed to withstand such rough handling that may be expected in normal use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N/A
22.ZE.1	For appliances provided with a seat, the seat gives adequate stability		N/A
	The distance between the seat and the control devices capable of being adapted to the operator		N/A
22.ZE.2	For appliances provided with separate devices for the start and the stop functions, the stop function is unambiguously identifiable and does always override the start function		N/A
	For appliances provided with one device performing the start and the stop function, the stop function is unambiguously identifiable and does always override the start function		N/A
22.ZE.3	Appliances designed in such a way that incorrect mounting is avoided, if this can lead to an unsafe situation		N/A
	If this is not possible, information on the correct mounting is given directly on the part and/or the enclosure		N/A
22.ZE.4	Where the weight, size or shape prevents appliances from being moved manually, they are fitted with attachments for lifting gear, or		N/A
	so designed that they can be fitted with such attachments, or		N/A
	be shaped in such a way that standard lifting gear can easily be used		N/A
	Appliances to be moved manually are constructed or equipped so that they can be moved easily and safely		N/A
22.ZE.5	The fixing systems of fixed guards which prevent access to dangerous moving transmission parts only removable with the use of tools		N/A

**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
	If such guards have to be removed by the user for routine cleaning or maintenance their fixing systems remain attached to the fixed guards or to the machine after removal		N/A
	Where possible, guards are incapable of remaining in place without their fixings		N/A
	This does not apply if, after removal of the screws, or if the component is incorrectly repositioned, the appliance becomes inoperative		N/A
	Movable guards are interlocked		N/A
	The interlocking devices prevent the start of hazardous appliance functions until the guards are fixed in their position, and give a stop command whenever they are no longer closed		N/A
	Where it is possible for an operator to reach the danger zone before the risk due to hazardous appliance functions has ceased, movable guards associated with a guard locking device in addition to an interlocking device that:		N/A
	- prevents the start of hazardous appliance functions until the guard is closed and locked, and		N/A
	- keeps the guard closed and locked until the risk of injury from the hazardous appliance functions has ceased		N/A
	Interlocking movable guards remain attached to the appliance when open, and		N/A
	they are designed and constructed in such a way that they can be adjusted only by means of an intentional action		N/A
22.ZE.6	Interlocking movable guards designed in such a way that the absence or failure of one of their components prevents starting or stops the hazardous appliance functions		N/A
	The guard is opened to the extent needed to cause the interlocking to operate and is then closed, the number of operations being defined in the specific Part 2..... :		N/A
	After this test any defect that may be expected in normal use is applied to the interlock system, including interruption of the supply, only one defect being simulated at a time		N/A
	After these tests the interlock system is fit for further use		N/A

**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
22.ZE.7	Adjustable guards restricting access to areas of the moving parts strictly necessary for the work are:		N/A
	- adjustable manually or automatically, depending on the type of work involved, and		N/A
	- readily adjustable without the use of tools		N/A
22.ZE.8	In case of interruption, re-establishment after an interruption or fluctuation in whatever manner of the power supply, the appliance does not restart		N/A
	However, automatic restarting of the operation is allowed if the appliance may continue to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage interruption or fluctuation occurred		N/A
22.ZE.9	Appliances fitted with means to isolate them from all energy sources		N/A
	Such isolators are clearly identified, and		N/A
	they are capable of being locked if reconnection endanger persons		N/A
	After the energy source is disconnected, it is possible to dissipate any energy remaining or stored in the circuits of the appliance without risk to persons		N/A
<b>ZF</b>	<b>ANNEX ZF (INFORMATIVE) CRITERIA APPLIED FOR THE ALLOCATION OF PRODUCTS COVERED BY STANDARDS IN THE EN 60335 SERIES UNDER LVD OR MD</b>		P
	List of standards under CENELEC/TC61 with the allocation under the LVD (Low Voltage Directive) or the MD (Machinery Directive)..... :		P
<b>ZG</b>	<b>ANNEX ZG (NORMATIVE) UV APPLIANCES</b>		N/A
	The following modifications to this standard apply to appliances having UV emitters		N/A
	This annex is not applicable to appliances covered by the scopes of IEC 60335-2-27, IEC 60335-2-59 or IEC 60335-2-109		N/A

**Attachment No.1****IEC60335\_2\_21O ATTACHMENT**

Clause	Requirement + Test	Result - Remark	Verdict
7.12.ZG	The instructions for appliances incorporating UVC emitters include the substance of the following: WARNING — This appliance contains a UV emitter. Do not stare at the light source		N/A
32	For appliances incorporating UV emitters the manufacturer delivers a declaration providing evidence that the plastic material exposed to the radiation is UV resistant		N/A
<b>ZH</b>	<b>ANNEX ZH (INFORMATIVE)</b> <b>Common plug and socket-outlet types in CENELEC countries</b>		P
	In general, supply cords of single-phase appliances having a rated current not exceeding 16 A are fitted with a plug complying with the following standard sheets:		P
	- for class I appliances or class II appliances with functional earth, standard sheet EU2, EU3 or EU4 .....:		P
	- for class II appliances, standard sheet EU5, EU6 or EU7.....:		N/A
	There are exemptions or differences in certain CENELEC countries		P
<b>ZI</b>	<b>ANNEX ZI (INFORMATIVE)</b> <b>Information on the application of A11:2014 to EN 60335-1:2012</b> <b>CENELEC CLC/TC 61(SEC)2096A</b>		P
	Clarification of the application of parts 2 in conjunction with the 2002 or 2012 version of EN 60335-1		P
<b>ZZA</b>	<b>ANNEX ZZA (INFORMATIVE)</b> <b>RELATIONSHIP BETWEEN THIS EUROPEAN STANDARD AND THE SAFETY OBJECTIVES OF DIRECTIVE 2014/35/EU [2014 OJ L96] AIMED TO BE COVERED</b>		P
	This standard provides one means of conforming to safety objectives of Directive 2014/35/EU		P
	When cited in the Official Journal under that Directive, compliance with the normative clauses of this standard given in Table ZZA.1 confers a presumption of conformity with the safety objectives of that Directive and associated EFTA regulations		P

**Attachment No.1**

## IEC60335\_2\_21O ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
	Compliance with this Part 2 when used together with the Part 1 provides one means of conformity with the safety objectives		P
	<b>ANNEX EN 62233:2008 + AC:2008</b> <b>EMF- ELECTROMAGNETICS FIELDS</b>		P
	The tested product also complies with the requirements of EN 62233:2008		P
	Limit .....100%	Measured max. : 0.023 %	P



**Attachment No.2****Product Photos**

Details of: Fig.1.



Details of: Fig.2.



**Attachment No.2**

**Product Photos**

Details of: Fig.3.



Details of: Fig.4.



**Attachment No.2**

**Product Photos**

Details of: Fig.5.



Details of: Fig.6.



**Attachment No.2**

**Product Photos**

Details of: Fig.7.




Details of: Fig.8.



**Attachment No.2**

**Product Photos**

Details of: Fig.9.

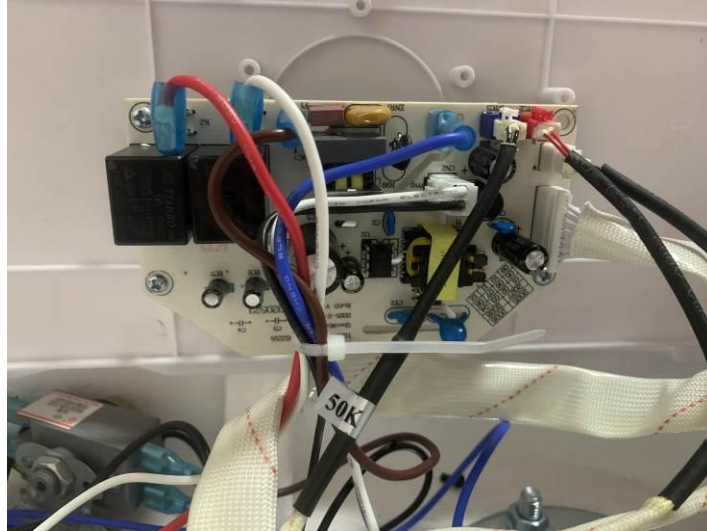

Details of: Fig.10.





**Attachment No.2****Product Photos**

Details of: Fig.11.



Details of: Fig.12.

**- End of test report -**