



TEST REPORT CEC TITLE 20 (10 C.F.R. Section 430.23)	
Report reference No.	AOC250722011ER
Compiled by	Bruce Lin 
Approved by	Robin Liu 
Date of issue	2025-07-23
Contents	12 pages
Testing laboratory	
Name	Shenzhen AOCE Electronic Technology Service Co., Ltd
Address	Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
Testing location	As above
Client	
Name	Dongguan Demeiyin Electronic Technology Co., Ltd.
Address	Nanchengjiedao, dongguandadaonanchengduan428hao, huanyuhuijinzhongxin, 5dong, 2302shi, Dongguan, Guangdong, China
Manufacturer	
Name	Dongguan Demeiyin Electronic Technology Co., Ltd.
Address	Nanchengjiedao, dongguandadaonanchengduan428hao, huanyuhuijinzhongxin, 5dong, 2302shi, Dongguan, Guangdong, China
Test specification	
Standard	10 C.F.R. Section 430.23 Appendix R to Subpart B of part 430
Test procedure	10 C.F.R. Section 430.23 Appendix R to Subpart B of part 430
Non-standard test method	N/A

Test item Description	Flamingo Candle Warmer Light
Trademark	CODOGOY
Model and/or type reference.....	GU10
Test model.....	GU10
Rating(s)(V/Hz).....	110-120V~, 50/60Hz, 32W
Test case verdicts	
Test case does not apply to the test object :	N(N/A)
Test item does meet the requirement :	P(Pass)
Test item does not meet the requirement :	F(Fail)
Testing	
Date of receipt of test item	2024-10-10
Date(s) of performance of test.....	2024-10-10 to 2025-07-22
Test item particulars:	10 C.F.R. Section 430.23
Lamp type:	☒ Omni directional ☐ Directional ☐ Decorative
Model type(ANSI Standard Lamp Shape):	/
Base type(ANSI).....	/
Control gear	☒ Integrated ☐ External
Use of lamp.....	☒ Indoor ☐ Outdoor ☐ Industry
Envelope transparency:	
- Clear lamp	☐
- Non-clear lamp	☒
Dimmable lamp:	☐
Lamps Diameter(inches):	/
Lamp cap installed:	/
Declared data:	
Rated voltage(V):	110-120 V~
Rated lamp power(W):	32 W
Rated useful luminous flux.....(lm):	2580lm
Rated CCT(K):	2700K
Rated life time(h):	20000h
Forward current of the LED chip.....(mA):	--
LED Manufacturer	Dongguan Demeiyin Electronic Technology Co., Ltd.
LED Model.....	GU10

Table of Contents

1. Test Method.....	4
1.1 Photometric and Electrical Measurement	4
1.2 Standby Power Measurement	4
1.3 Luminous Flux and Color Maintenance Measurement.....	5
1.4 In-Situ Temperature Measurement Test (ISTMT)	5
1.5 Start Test 、Flicker、Dimming.....	5
2. Test equipment list.....	6
2.1 The standard to judge	6
3. Test Data	8
3.1 Photometric Measurements at 25°C – Integrating Sphere	8
3.2 Photometric Measurements at 25°C – Integrating Sphere	8
3.3 Spectral Data Over Visible Wavelengths of Sample:	9
3.4 Lumen maintenance and dimming	10
4. Photo of sample.....	12

1. Test Method

1.1 Photometric and Electrical Measurement

Test Standard.....: IES LM-79-08:Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products

Ambient Condition: 24.9°C

Stabilization time: 0.5h

Orientation(burning position) of SSL product during test: 5 base-up and 5 base-down

Test Method: The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at rated voltage and was stabilized before measurement. Lumen output, Lamp efficacy, Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm. Input power, Power factor, Voltage, Current, were calculated from the digital power meter.

1.2 Standby Power Measurement

Test Standard.....: IEC 62301-2011:Household electrical appliances-Measurement of standby power

Ambient Condition.....: 24.9°C

Stabilization time: 0.5h

Orientation(burning position) of SSL product during test: 5 base-up and 5 base-down

Test Method: Sections 5.3.4 Direct meter reading method. The sample was operated at rated voltage and was stabilized before measurement. The standby power were calculated from the digital power meter.

1.3 Luminous Flux and Color Maintenance Measurement

Test Standard.....: IES LM-84: Approved Method: Measuring Luminous Flux and Color Maintenance of LED Lamps, Light Engines, and Luminaires

Ambient Condition: 24.9°C / 60%RH

Orientation(burning position) of SSL product

during test: 5 base-up and 5 base-down

Test Method: Season the LED Lamp from 0 hours to 6000 hours.

The sample are operated steady state (no cycling) for a period of 6000 hours, checked the lumen flux and Chromaticity Shift every 1000 hours. The samples are inspected at regular intervals (24 hours) throughout the 6000 hours. The time and date of failure of each lamp is recorded. The actual elapsed time for each light package is in hour.

1.4 In-Situ Temperature Measurement Test (ISTMT)

Test Method: Maximum led source operating temperature measurements were taken on one test sample per model with a thermocouple and temperature meter. The SSL sample was allowed to reach thermal equilibrium for at least 3 hours before measurements were taken. Led source temperature was measured at the point as indicated by the included diagram in accordance with manufacturers declared hot spot location. The maximum temperature was recorded for the sample.

1.5 Start Test 、Flicker、Dimming

Ambient Condition.....: 24.9°C

Test Method.....: The sample was operated at 120 Volts AC, 60Hz.A photodetector is used to monitor the luminaire light output. Time、Flicker、Dimming shall be measured by a Flicker Photometer.

2. Test equipment list

Instrument	Equipment ID	Model	Calibration Date	Calibration Due Date
2m Integrating Sphere	SENSING	SL-300	AOC-S-126	2026-04-13
DC source	OYHS	OYHS-Z120V-50A	AOC-S-062	2026-04-13
Digital power meter	HENGHE	WT310E	AOC-S-012	2026-04-13
Standard Lamp	SENSING	240V/150W	AOC-S-143	2026-04-13
Variable frequency power supply	WOSEN	BP6005	AOC-S-129	2026-04-13
Oscilloscope	TEKTRONIX	MDO3012	AOC-S-028	2026-04-13

2.1 The standard to judge

State-regulated Light Emitting Diode Lamp		
Minimum luminous efficacy	After January1,2018:≥68 lumens/watt	80.4
	After July1,2019:≥80 lumens/watt	
Lamp Power	Detetrmined using the appropriate test method	31.6W
Minimum combined efficacy seore (efficacy+2.3*Ra)	After January1,2018:≥282	308.8
	After July 1,2018:≥297	
Minimum lumen output	For candelabra base:≥150 lumens	/
	For other base:≥200 lumens	2580
Minimum light distribution	Omnidirectional lamps (A-lamps): ENERGY STAR Lamps Version 2.0 requirements	/
	Decorative lamps (B, BA, C, CA, F or G): ENERGY STAR Lamps Version 1.1 requirements	/
Correlated color temperature(CCT)	The chromaticity and color consistency requirements are in Table 1 of Annex B of ANSI C78.377-2015	Rated CCT:2700K Complete ANSI C78.377-2015

Required Information	Permissible Answers	Lnformation/ Report value	Verdict
Minimum Dimming level	--	--	--

Dimming control compatible	Forward, Phase cut control, Reverse phase cut, Powerline carrier, Digital control, 0-10VDC, other (At least one type must be listed)	--	--
NEMA SSL 7A Compatible?	Yes/No If compatible with forward phase cut dimmer control, "Yes". If not, "No".	--	--
Flicker:			
See JA10 Table 10-1 for flicker data requirements and Permissible answers	<30% for frequencies of 200Hz or below, At 100% and 20% light output	--	--
Audible Noise:			
100% light Output :Audible Noise	≤24dBA	22	P
20% light Output :Audible Noise	≤24dBA	--	--

3. Test Data

3.1 Photometric Measurements at 25° C - Integrating Sphere

Sample No.	Base Orientation	Voltage (V)	Current (A)	Lamp Power (W)	Power Factor	Light Output (Lumens)	Revised Lumen/ W	CCT (K)	CRI
S1	base-up	120.1	0.285	32.0	0.935	2598.40	81.2	2691	99.3
S2	base-up	120.0	0.281	31.5	0.935	2535.75	80.5	2666	99.4
S3	base-up	120.1	0.286	31.8	0.926	2576.00	80.5	2701	99.9
S4	base-up	120.1	0.280	31.5	0.936	2548.35	80.9	2715	99.8
S5	base-up	120.1	0.279	31.1	0.928	2585.60	80.8	2672	99.9
S6	base-down	120.1	0.279	31.5	0.941	2554.65	81.1	2693	99.3
S7	base-down	120.0	0.281	31.5	0.937	2538.90	80.6	2709	99.3
S8	base-down	120.0	0.281	31.7	0.940	2548.68	80.4	2699	99.4
S9	base-down	120.0	0.281	31.8	0.944	2587.26	80.6	2680	99.9
S10	base-down	120.1	0.277	31.8	0.956	2566.26	80.7	2683	99.3
Average		120.1	0.281	31.6	0.938	2563.99	80.7	2691	99.5

3.2 Photometric Measurements at 25° C - Integrating Sphere

Sample No.	Base Orientation	R9	Duv	x (CIE1931)	y (CIE1931)	u' (CIE1976)	v' (CIE1976)	Standby Power
S1	base-up	98	0.00008	0.4622	0.4124	0.2635	0.5281	0.36
S2	base-up	95	0.00008	0.4654	0.4145	0.2653	0.5307	0.31
S3	base-up	97	0.00008	0.4636	0.4129	0.2643	0.5286	0.36
S4	base-up	99	0.00008	0.4659	0.4145	0.2656	0.5307	0.33
S5	base-up	98	0.00009	0.4631	0.4137	0.2640	0.5297	0.34
S6	base-down	98	0.00008	0.4608	0.4120	0.2542	0.5275	0.29
S7	base-down	98	0.00007	0.4626	0.4116	0.2637	0.5270	0.28
S8	base-down	97	0.00009	0.4645	0.4133	0.2648	0.5291	0.36
S9	base-down	97	0.00008	0.4650	0.4129	0.2651	0.5286	0.34
S10	base-down	99	0.00008	0.4640	0.4145	0.2645	0.5307	0.36
Average		98	0.00008	0.4637	0.4132	0.2635	0.5291	0.33

3.3 Spectral Data Over Visible Wavelengths of Sample:

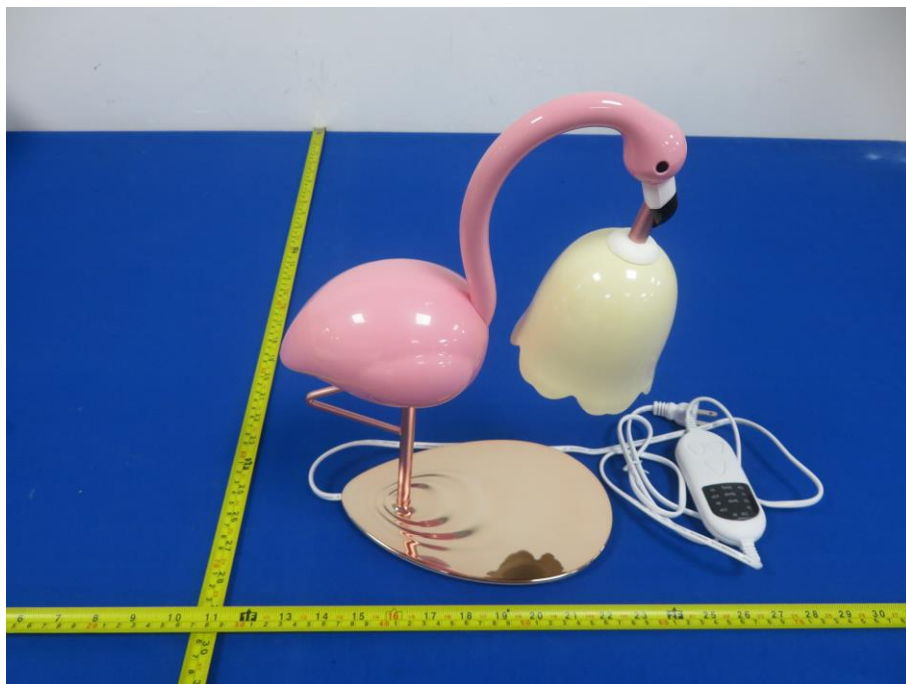
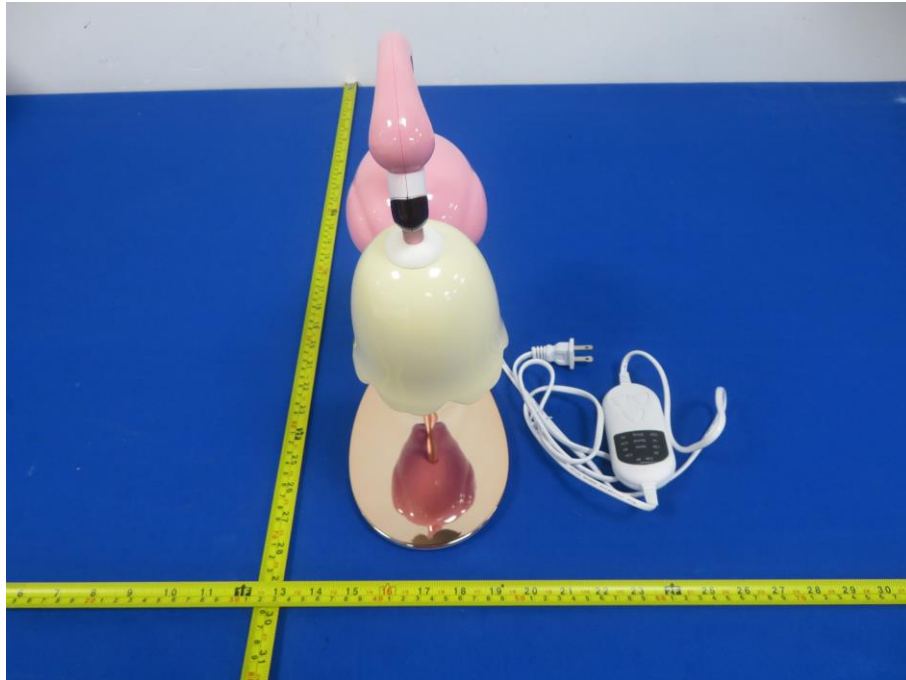
//

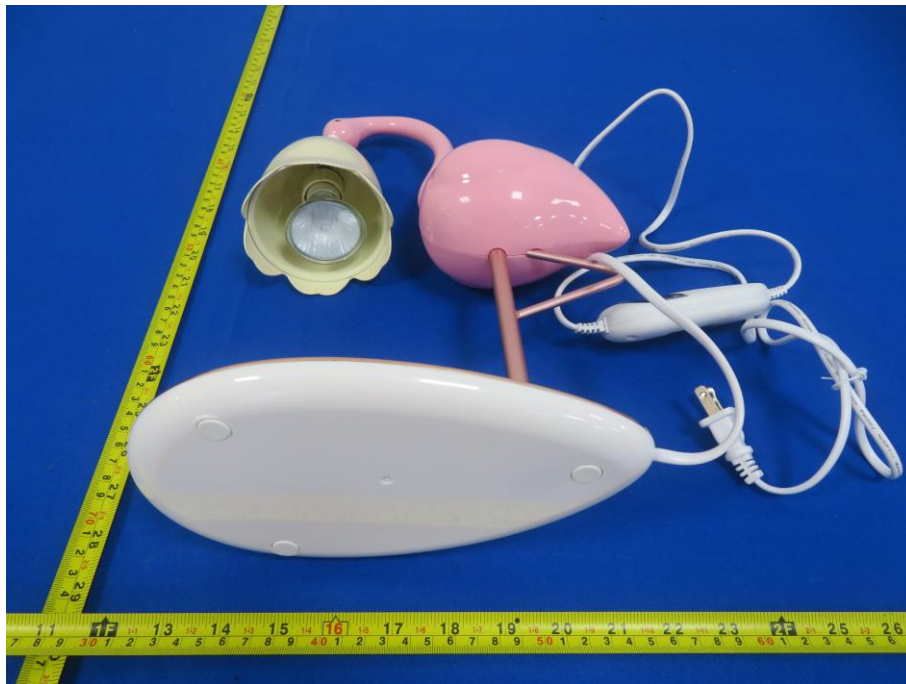
3.4 Lumen maintenance and dimming

Sample No.	LM-80 and TM-21 Projected Time to L70 (hours)	6,000 hour survival rate (%)	Minimum dimming level(%)	Start Time (ms)	100% light output: Audible Noise (dBA)	20% light output: Audible Noise (dBA)
S1	20000	100	N/A	285.94	22	N/A
S2	20000	100	N/A	296.89	22	N/A
S3	20000	100	N/A	292.45	22	N/A
S4	20000	100	N/A	297.78	22	N/A
S5	20000	100	N/A	298.96	22	N/A
S6	20000	100	N/A	290.38	22	N/A
S7	20000	100	N/A	299.85	22	N/A
S8	20000	100	N/A	294.82	23	N/A
S9	20000	100	N/A	288.90	22	N/A
S10	20000	100	N/A	294.82	21	N/A
Average	20000	100	N/A	294.08	22	N/A

Sample No.	1,000 hour lumen maintenance (%)	2,000 hour lumen maintenance (%)	3,000 hour lumen maintenance (%)	4,000 hour lumen maintenance (%)	5,000 hour lumen maintenance (%)	6,000 hour lumen maintenance (%)
S1	101.84	100.43	99.26	99.20	98.79	96.92
S2	101.61	100.21	99.04	98.98	98.57	96.71
S3	101.95	100.54	99.38	99.31	98.90	97.03
S4	102.07	100.66	99.50	99.43	99.02	97.15
S5	101.56	100.16	98.99	98.93	98.52	96.66
S6	101.52	100.11	98.95	98.89	98.48	96.62
S7	101.31	99.91	98.75	98.69	98.28	96.42
S8	101.95	100.54	99.37	99.31	98.90	97.03
S9	101.99	100.59	99.42	99.35	98.94	97.07
S10	101.61	100.21	99.05	98.98	98.57	96.71
Average	101.74	100.34	99.17	99.11	98.70	96.83

Sample No.	R1	R2	R3	R4	R5	R6	R7	R8
S1	98	100	100	99	100	99	99	99
S2	98	100	100	99	100	99	99	100
S3	99	100	100	100	100	100	100	100
S4	99	100	100	100	100	100	100	99
S5	99	100	100	100	100	100	100	100
S6	98	100	100	99	100	99	99	99
S7	98	100	100	99	100	99	99	99
S8	98	100	100	99	100	99	99	100
S9	99	100	100	100	100	100	100	100
S10	98	100	100	99	100	99	99	99
Average	98	100	100	99	100	99	99	100

4. Photo of sample**ATTACHMENT 1(S)**

ATTACHMENT 1(S)

-----END OF REPORT-----