



|                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>TEST REPORT</b><br><b>COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012</b><br><b>COMMISSION DELEGATED REGULATION (EU) No 874/2012 of 26 September 2012</b><br><b>Implementing Directive 2009/125/EC Of The European Parliament And Of The Council With</b><br><b>Regard To Ecodesign Requirements For Directional Lamps, Light Emitting Diode</b><br><b>Lamps And Related Equipment</b> |                                                                                                                                                    |
| Report reference No. ....: AOC250919046ER-R1                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                    |
| Tested by .....                                                                                                                                                                                                                                                                                                                                                                                       | Bill Hu <i>Bill Hu</i>                                                                                                                             |
| Approved by .....                                                                                                                                                                                                                                                                                                                                                                                     | Robin Liu <i>Robin Liu</i>                                                                                                                         |
| Date of issue .....                                                                                                                                                                                                                                                                                                                                                                                   | 2025-09-30                                                                                                                                         |
| Contents .....                                                                                                                                                                                                                                                                                                                                                                                        | 20 pages                                                                                                                                           |
| <b>Testing laboratory</b>                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                    |
| Name .....                                                                                                                                                                                                                                                                                                                                                                                            | Shenzhen AOCE Electronic Technology Service Co., Ltd                                                                                               |
| Address .....                                                                                                                                                                                                                                                                                                                                                                                         | Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China                  |
| Testing location .....                                                                                                                                                                                                                                                                                                                                                                                | As above                                                                                                                                           |
| <b>Client</b>                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                    |
| Name .....                                                                                                                                                                                                                                                                                                                                                                                            | FADI ABDELFAHMAH M.EMHAISEN                                                                                                                        |
| Address .....                                                                                                                                                                                                                                                                                                                                                                                         | JORDAN-AMMAN-RAS ALEIN                                                                                                                             |
| <b>Manufacturer</b>                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                    |
| Name .....                                                                                                                                                                                                                                                                                                                                                                                            | ZHONGSHAN ORIENT TRADING CO., LTD                                                                                                                  |
| Address .....                                                                                                                                                                                                                                                                                                                                                                                         | ONE OF CARDS 11-12 ON THE THIRD FLOOR OF HUAXING LIGHTING PLAZA, NO.72 XINXING MIDDLE ROAD, GUZHEN TOWN, ZHONGSHAN CITY, GUANGDONG PROVINCE, CHINA |
| <b>Test specification</b>                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                    |
| Standard .....                                                                                                                                                                                                                                                                                                                                                                                        | COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012; COMMISSION DELEGATED REGULATION (EU) No 874/2012 of 26 September 2012                 |
| Test procedure .....                                                                                                                                                                                                                                                                                                                                                                                  | COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012; COMMISSION DELEGATED REGULATION (EU) No 874/2012 of 26 September 2012                 |
| Non-standard test method .....                                                                                                                                                                                                                                                                                                                                                                        | N/A                                                                                                                                                |
| <b>Test item Description</b> ....: LED PENEL LIGHT                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                    |
| Trademark .....                                                                                                                                                                                                                                                                                                                                                                                       | AL-QUDES                                                                                                                                           |
| Model and/or type reference .....                                                                                                                                                                                                                                                                                                                                                                     | AQ-36                                                                                                                                              |
| Rating(s)(V/Hz) .....                                                                                                                                                                                                                                                                                                                                                                                 | 170-265V~, 50/60 Hz, 36W                                                                                                                           |
| Test Report Form No. ....                                                                                                                                                                                                                                                                                                                                                                             | TRF No. 1194/2012                                                                                                                                  |
| Test Report Form(s) Originator .....                                                                                                                                                                                                                                                                                                                                                                  | AOCE                                                                                                                                               |
| Master TRF .....                                                                                                                                                                                                                                                                                                                                                                                      | 2019-11-30                                                                                                                                         |

|                                                                  |     |
|------------------------------------------------------------------|-----|
| <b>Test case verdicts</b>                                        |     |
| Test case does not apply to the test object : N(N/A)             |     |
| Test item does meet the requirement .....: P(Pass)               |     |
| Test item does not meet the requirement ...: F(Fail)             |     |
| <b>Testing</b>                                                   |     |
| Date of receipt of test item .....: 2024-11-19                   |     |
| Date(s) of performance of test.....: 2024-11-19 to 2025-09-19    |     |
| Test item particulars:                                           |     |
| Lamp type:                                                       |     |
| - Non directional LED lamp                                       | Yes |
| - Directional LED lamp                                           | No  |
| - LED lamp replacing fluorescent lamp without integrated ballast | No  |
| Control gear:                                                    |     |
| - Integrated                                                     | No  |
| - External                                                       | Yes |
| Use of lamp:                                                     |     |
| - Indoor                                                         | Yes |
| - Outdoor                                                        | No  |
| - Industry                                                       | No  |
| Envelope transparency:                                           |     |
| - Clear lamp                                                     | No  |
| - Non-clear lamp                                                 | Yes |
| Dimmable lamp:                                                   |     |
|                                                                  | No  |
| Lamps with anti-glare shield:                                    |     |
|                                                                  | No  |
| Lamp cap installed:                                              |     |
|                                                                  | N/A |
| <b>Declared data:</b>                                            |     |
| Rated voltage .....(V): 170-265V~                                |     |
| Rated lamp power .....(W): 36 W                                  |     |
| Rated useful luminous flux.....(lm): 3600 lm                     |     |
| Rated beam angel ..... (°): N/A                                  |     |
| Rated Ra.....: 80                                                |     |
| Rated CCT .....(K): 7000K                                        |     |
| Rated life time .....(h): 50000 h                                |     |
| LED information                                                  |     |

**Summary of testing:**

The product meets the efficiency requirement of stage 1 to stage 3 of directional lamps according to the implementation measure No. EU 1194/2012.

The product meets the functionality requirements of stage 3 according to the implementation measure No. EU 1194/2012.

**Remark:**

Lamp survival factor at 6000 h and lumen maintenance at 6000 h will be applicable from 1 March 2014.

**Efficiency & Information requirement:**

| <b>Non-directional</b> | Stage 1    | Stage 2    | Stage 3    | Stage 4    | Stage 5    | Stage 6    |
|------------------------|------------|------------|------------|------------|------------|------------|
| Start Date             | 1.Sep.2009 | 1.Sep.2009 | 1.Sep.2011 | 1.Sep.2012 | 1.Sep.2013 | 1.Sep.2016 |

| <b>directional</b> | Stage 1    | Stage 2    | Stage 3    |
|--------------------|------------|------------|------------|
| Start Date         | 1.Sep.2013 | 1.Sep.2014 | 1.Sep.2016 |

**Functionality requirement:**


| <b>All</b> | Stage 1    | Stage 1a   | Stage 2    | Stage 3    |
|------------|------------|------------|------------|------------|
| Start Date | 1.Sep.2013 | 1.Mar.2014 | 1.Sep.2014 | 1.Sep.2016 |

**Note:**

This report was based on the original report AOC250919046ER, only following items are revised, when this report issued, the original report will be withdraw:

- 1). Update the product name.

Copy of marking plate:

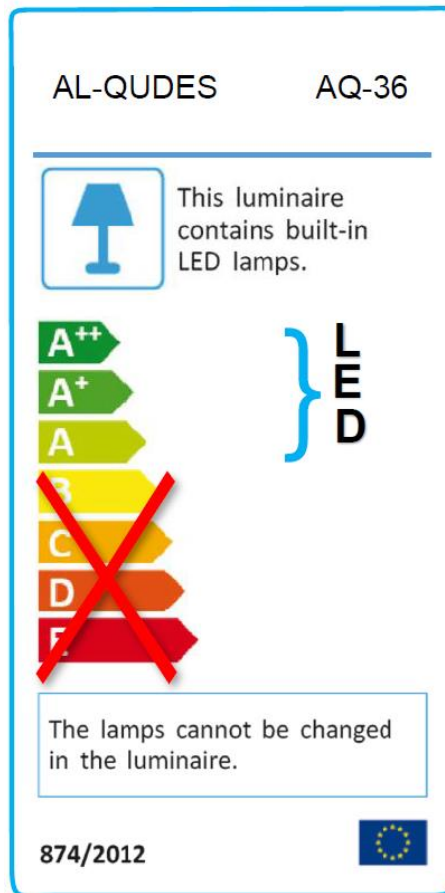

#### General remarks

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(see Enclosure #)" refers to additional information appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a comma (point) is used as the decimal separator.

#### Summary of testing

The sample(s) tested complies with the requirements of COMMISSION REGULATION (EC) No 1194/2012.

These tests fulfil the requirements of standard ISO/IEC 17025.

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Measurements of power of 0,50 W or greater was made with an uncertainty of less than or equal to 2 % at the 95 % confidence level.

Measurements of power of less than 0,50 W was made with an uncertainty of less than or equal to 0,01 W at the 95 % confidence level.

| COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012 |                                                                                                                                                                          |                 |         |
|-------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------|
| Clause                                                      | Requirement - Test                                                                                                                                                       | Result - Remark | Verdict |
| 0                                                           | <b>Measurement methods</b>                                                                                                                                               |                 | P       |
|                                                             | Recognised state of art measurement methods incl. the one published in the Official Journal taking into account the measurement methods of (EC) 244/2009, (EU) 1194/2012 |                 | P       |
| 1.                                                          | Sample                                                                                                                                                                   |                 | P       |
|                                                             | Number of sample used for test .....                                                                                                                                     |                 | P       |
| 2.                                                          | Number of sample used for test .....                                                                                                                                     | 20 PCS          | P       |
| 2.1                                                         | <b>Non-directional LED lamp</b>                                                                                                                                          |                 | P       |
| a                                                           | Non-directional LED lamp                                                                                                                                                 |                 | P       |
|                                                             | Evaluation : $P \leq P_{max}$                                                                                                                                            |                 | P       |
| b                                                           | Limit definition:                                                                                                                                                        |                 | P       |
|                                                             | Clear lamps - Stage 1~5:<br>$P_{max} = 0,8 * (0,88\sqrt{\Phi+0,049\Phi})$                                                                                                |                 | N       |
|                                                             | Clear lamps - Stage 6:<br>$P_{max} = 0,6 * (0,88\sqrt{\Phi+0,049\Phi})$                                                                                                  |                 | N       |
|                                                             | Non-clear lamps - Stage 1~6:<br>$P_{max} = 0,24\sqrt{\Phi+0,0103\Phi}$                                                                                                   |                 | P       |
| c                                                           | Exceptions:                                                                                                                                                              |                 | N       |
|                                                             | Clear lamps $60 \text{ lm} \leq \Phi \leq 950 \text{ lm}$ in Stage 1<br>$P_{max} = 1,1 * (0,88\sqrt{\Phi+0,049\Phi})$                                                    |                 | N       |
|                                                             | Clear lamps $60 \text{ lm} \leq \Phi \leq 725 \text{ lm}$ in Stage 2<br>$P_{max} = 1,1 * (0,88\sqrt{\Phi+0,049\Phi})$                                                    |                 | N       |
|                                                             | Clear lamps $60 \text{ lm} \leq \Phi \leq 450 \text{ lm}$ in Stage 3<br>$P_{max} = 1,1 * (0,88\sqrt{\Phi+0,049\Phi})$                                                    |                 | N       |
|                                                             | Clear lamps with G9 or R7s cap in Stage 6<br>$P_{max} = 0,8 * (0,88\sqrt{\Phi+0,049\Phi})$                                                                               |                 | N       |
|                                                             | Correction factors, which are cumulative where appropriate and also applicable to the products covered by the Exceptions:                                                |                 | N       |
|                                                             | non-clear lamp with colour rendering index $\geq 90$ and $P \leq 0,5 * (0,88\sqrt{\Phi+0,049\Phi})$                                                                      | $P_{max}/0,85$  | N       |
|                                                             | non-clear lamp with second envelope and $P \leq 0,5 * (0,88\sqrt{\Phi+0,049\Phi})$                                                                                       | $P_{max}/0,95$  | N       |
|                                                             | LED lamp requiring external power supply                                                                                                                                 | $P_{max}/1.1$   | N       |

|     |                                                                                                                    |  |   |
|-----|--------------------------------------------------------------------------------------------------------------------|--|---|
| 2.2 | <b>Directional LED lamp</b>                                                                                        |  | N |
| a.  | The maximum EEI (Annex III, cl.1.1 of EU 1194/2012):                                                               |  | N |
|     | The energy efficiency index is calculated as follows and rounded to 2 decimal places:<br>$EEI = P_{cor} / P_{ref}$ |  | N |
|     | For models with $\Phi_{use} \geq 1\,300$ lumen:<br>$P_{ref} = 0,07341\Phi_{use}$                                   |  | N |
|     | Stage 1~2: $EEI_{max} \leq 0.5$                                                                                    |  | N |
|     | Stage 3: $EEI_{max} \leq 0.2$                                                                                      |  | N |
| b   | Correction factors, which are cumulative where appropriate                                                         |  | N |

| COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012 |                                                                                                                           |                                  |         |
|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|----------------------------------|---------|
| Clause                                                      | Requirement - Test                                                                                                        | Result - Remark                  | Verdict |
|                                                             | No correction appropriate : $P_{cor} = P_{rated}$ (lamps)                                                                 | $P_{rated}$ :<br>$P_{cor}$ :     | N       |
|                                                             | Lamps operating on external LED lamp control gear : $P_{cor} = P_{rated} \times 1,10$                                     | $P_{rated}$ :<br>$P_{cor}$ :     | N       |
|                                                             | Lamps with anti-glare shield: $P_{cor} = P_{rated} \times 0,80$                                                           | $P_{rated}$ :<br>$P_{cor}$ :     | N       |
| c                                                           | Pref is the reference power obtained from the useful luminous flux of the lamp ( $\Phi_{use}$ ) by the following formula: |                                  | N       |
|                                                             | For models with $\Phi_{use} < 1\,300$ lumen:<br>$P_{ref} = 0,88\sqrt{\Phi_{use}} + 0,049\Phi_{use}$                       | $\Phi_{use}$ : lm<br>$P_{ref}$ : | N       |
|                                                             | For models with $\Phi_{use} \geq 1\,300$ lumen:<br>$P_{ref} = 0,07341 \Phi_{use}$                                         | $\Phi_{use}$ :<br>$P_{ref}$ :    | N       |
| 2.3                                                         | Energy efficiency requirements for lamp control gear(LED driver test with appliance)                                      |                                  | N       |
|                                                             | Stage 1~2: No-load power $\leq 1.0W$                                                                                      |                                  | N       |
|                                                             | Stage 3: No-load power $\leq 0.5W$                                                                                        |                                  | N       |

|     |                                                                                                                           |                 |   |
|-----|---------------------------------------------------------------------------------------------------------------------------|-----------------|---|
| 3   | Lamp functionality requirements for non-directional and directional LED lamp (Annex III, cl.2.2, table 5 of EU 1194/2012) |                 | P |
| 3.1 | Lamp survival factor (LSF) at 6000h                                                                                       |                 | P |
|     | From March 1, 2014: $LSF \geq 0.90$                                                                                       | See the table 5 | P |
| 3.2 | Lumen maintenance (LLMF) at 6000h                                                                                         |                 | P |
|     | From March 1, 2014: $LLMF \geq 0.80$                                                                                      | See the table 5 | P |
| 3.3 | Number of switching cycles (n) before failure                                                                             |                 | P |
|     | $n \geq 15\,000$ if rated lamp life $\geq 30\,000$ h                                                                      |                 | P |
|     | otherwise: $n \geq$ half the rated lamp life expressed in hours                                                           | See the table 5 | N |
| 3.4 | Starting time ( $t_{start}$ )                                                                                             |                 | P |
|     | $t_{start} < 0.5$ s                                                                                                       | See the table 5 | P |
| 3.5 | Lamp warm-up time ( $t_{warm}$ ) to 95 % $\Phi$                                                                           |                 | P |
|     | $t_{warm} < 2$ s                                                                                                          | See the table 5 | P |
| 3.6 | Premature failure rate (PFR)                                                                                              |                 | P |
|     | $PFR \leq 5,0$ % at 1000 h                                                                                                | See the table 5 | P |
| 3.7 | Colour rendering ( $R_a$ )                                                                                                |                 | P |
|     | $R_a \geq 80$                                                                                                             | See the table 5 | P |
|     | $R_a \geq 65$ if the lamp is intended for outdoor or industrial applications                                              |                 | N |
| 3.8 | Colour consistency                                                                                                        |                 | P |
|     | Variation of chromaticity coordinates within a sixstep MacAdam ellipse or less.                                           | See the table 5 | P |
| 3.9 | Lamp power factor (PF)                                                                                                    |                 | P |
|     | $P \leq 2$ W: no requirement                                                                                              |                 | N |

| COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012 |                                                                                                                                                                                          |                 |         |
|-------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------|
| Clause                                                      | Requirement - Test                                                                                                                                                                       | Result - Remark | Verdict |
|                                                             | 2 W < P ≤ 5 W: PF > 0,4<br>5 W < P ≤ 25 W: PF > 0,5                                                                                                                                      |                 | N       |
|                                                             | P > 25 W: PF > 0,9                                                                                                                                                                       | See the table 5 | P       |
| 3.10                                                        | Compatibility requirement for lamps using lamp caps also used with filament lamps                                                                                                        |                 | N       |
|                                                             | Lamps shall comply from <b>stage 2</b> with state of art requirements for compatibility with equipment designed for installation between the mains and filament lamps (e.g. dimmer, ...) |                 | N       |

|       |                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                             |   |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|---|
| 4     | Product Information Requirements                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                             | N |
| 4.1   | Product information requirements for <b>directional lamps</b> (Annex III, cl.3.1 of EU 1194/2012)                                                                                                                                                                                                                                                                                                                                                           |                                                                                                             | N |
|       | The following information shall be provided as from stage 1, except where otherwise stipulated.                                                                                                                                                                                                                                                                                                                                                             |                                                                                                             | N |
|       | In all forms of product information, the term ' <b>energy-saving lamp</b> ' or any similar product related promotional statement about lamp efficacy may be used only if the energy efficiency index of the lamp (calculated in accordance with the method set out in point 1.1 of this Annex) is 0,40 or below.                                                                                                                                            | LED modules marketed as part of a luminaire from which they are not intended to be removed by the end-user. | N |
|       |                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                             | N |
| 4.1.1 | Information to be displayed on the lamp itself                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                             | N |
|       | For lamps other than high-intensity discharge lamps, the value and unit ('lm', 'K' and '°') of the nominal useful luminous flux, of the colour temperature and of the nominal beam angle shall be displayed in a legible font on the surface of the lamp if, after the inclusion of safety-related information such as power and voltage, there is sufficient space available for it on the lamp without unduly obstructing the light coming from the lamp. |                                                                                                             | N |
|       | If there is room for only one of the three values, the nominal useful luminous flux shall be provided. If there is room for two values, the nominal useful luminous flux and the colour temperature shall be provided.                                                                                                                                                                                                                                      |                                                                                                             | N |
| 4.1.2 | Information to be visibly displayed to end-users, prior to their purchase, on the packaging and on free access websites                                                                                                                                                                                                                                                                                                                                     |                                                                                                             | N |
|       | The information below shall be displayed on free access websites and in any other form the manufacturer deems appropriate.                                                                                                                                                                                                                                                                                                                                  |                                                                                                             | N |
|       | If the product is placed on the market in a packaging containing information to be visibly displayed to the end- users, prior to their purchase, the information shall also be clearly and prominently indicated on the packaging.                                                                                                                                                                                                                          |                                                                                                             | N |

| COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                       |         |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------|
| Clause                                                      | Requirement - Test                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Result - Remark                                                                       | Verdict |
|                                                             | The information does not need to use the exact wording on the list below. It may be displayed in the form of graphs, drawings or symbols rather than text.                                                                                                                                                                                                                                                                                                                                      |                                                                                       | N       |
| (a)                                                         | The information does not need to use the exact wording on the list below. It may be displayed in the form of graphs, drawings or symbols rather than text.                                                                                                                                                                                                                                                                                                                                      |                                                                                       | N       |
| (b)                                                         | Nominal life time of the lamp in hours (not longer than the rated life time);                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                       | N       |
| (c)                                                         | Colour temperature, as a value in Kelvins and also expressed graphically or in words;                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                       | N       |
| (d)                                                         | Number of switching cycles before premature failure;                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                       | N       |
| (e)                                                         | Warm-up time up to 60 % of the full light output (may be indicated as 'instant full light' if less than 1 second);                                                                                                                                                                                                                                                                                                                                                                              |                                                                                       | N       |
| (f)                                                         | A warning if the lamp cannot be dimmed or can be dimmed only on specific dimmers; in the latter case a list of compatible dimmers shall be also provided on the manufacturer's website;                                                                                                                                                                                                                                                                                                         |                                                                                       | N       |
| (g)                                                         | If designed for optimum use in non-standard conditions (such as ambient temperature $T_a \neq 25^\circ\text{C}$ or specific thermal management is necessary), information on those conditions;                                                                                                                                                                                                                                                                                                  |                                                                                       | N       |
| (h)                                                         | Lamp dimensions in millimetres (length and largest diameter);                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                       | N       |
| (i)                                                         | Nominal beam angle in degrees;                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                       | N       |
| (j)                                                         | If the lamp's beam angle is $\geq 90^\circ$ and its useful luminous flux as defined in point 1.1 of this Annex is to be measured in a $120^\circ$ cone, a warning that the lamp is not suitable for accent lighting;                                                                                                                                                                                                                                                                            |                                                                                       | N       |
| (k)                                                         | If the lamp cap is a standardised type also used with filament lamps, but the lamp's dimensions are different from the dimensions of the filament lamp(s) that the lamp is meant to replace, a drawing comparing the lamp's dimensions to the dimensions of the filament lamp(s) it replaces;                                                                                                                                                                                                   |                                                                                       | N       |
| (l)                                                         | An indication that the lamp is of a type listed in the first column of Table 6 may be displayed only if the luminous flux of the lamp in a $90^\circ$ cone ( $\Phi_{90^\circ}$ ) is not lower than the reference luminous flux indicated in Table 6 for the smallest wattage among the lamps of the type concerned. The reference luminous flux shall be multiplied by the correction factor in Table 7. For LED lamps, it shall be in addition multiplied by the correction factor in Table 8; | Claimed equivalent:<br>Reference $\Phi_{90^\circ}$ (lm):<br>(incl. correction factor) | N       |



## COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012

| Clause | Requirement - Test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Result - Remark                                                                                     | Verdict |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------|
| (m)    | An equivalence claim involving the power of a replaced lamp type may be displayed only if the lamp type is listed in Table 6 and if the luminous flux of the lamp in a 90° cone ( $\Phi_{90^\circ}$ ) is not lower than the corresponding reference luminous flux in Table 6. The reference luminous flux shall be multiplied by the correction factor in Table 7. For LED lamps, it shall be in addition multiplied by the correction factor in Table 8. The intermediate values of both the luminous flux and the claimed equivalent lamp power (rounded to the nearest 1 W) shall be calculated by linear interpolation between the two adjacent values. | Claimed equivalent:<br>Claimed P:<br>Reference $\Phi_{90^\circ}$ (lm):<br>(incl. correction factor) | N       |

Table 6

## Reference luminous flux for equivalence claims

| Extra-low voltage reflector type         |           |                                  |
|------------------------------------------|-----------|----------------------------------|
| Type                                     | Power (W) | Reference $\Phi_{90^\circ}$ (lm) |
| MR11 GU4                                 | 20        | 160                              |
|                                          | 35        | 300                              |
| MR16 GU 5.3                              | 20        | 180                              |
|                                          | 35        | 300                              |
|                                          | 50        | 540                              |
| AR111                                    | 35        | 250                              |
|                                          | 50        | 390                              |
|                                          | 75        | 640                              |
|                                          | 100       | 785                              |
| Mains-voltage blown glass reflector type |           |                                  |
| Type                                     | Power (W) | Reference $\Phi_{90^\circ}$ (lm) |
| R50/NR50                                 | 25        | 90                               |
|                                          | 40        | 170                              |
| R63/NR63                                 | 40        | 180                              |
|                                          | 60        | 300                              |
| R80/NR80                                 | 60        | 300                              |
|                                          | 75        | 350                              |
|                                          | 100       | 580                              |
| R95/NR95                                 | 75        | 350                              |
|                                          | 100       | 540                              |
| R125                                     | 100       | 580                              |
|                                          | 150       | 1 000                            |

## COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012

| Clause | Requirement - Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

## Mains-voltage pressed glass reflector type

| Type   | Power (W) | Reference $\Phi_{90^\circ}$ (lm) |
|--------|-----------|----------------------------------|
| PAR16  | 20        | 90                               |
|        | 25        | 125                              |
|        | 35        | 200                              |
|        | 50        | 300                              |
| PAR20  | 35        | 200                              |
|        | 50        | 300                              |
|        | 75        | 500                              |
| PAR25  | 50        | 350                              |
|        | 75        | 550                              |
| PAR30S | 50        | 350                              |
|        | 75        | 550                              |
|        | 100       | 750                              |
| PAR36  | 50        | 350                              |
|        | 75        | 550                              |
|        | 100       | 720                              |
| PAR38  | 60        | 400                              |
|        | 75        | 555                              |
|        | 80        | 600                              |
|        | 100       | 760                              |
|        | 120       | 900                              |

## COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012

| Clause | Requirement - Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

Table 7

Multiplication factors for lumen maintenance

| Lamp type                 | Luminous flux multiplication factor                                                                      |
|---------------------------|----------------------------------------------------------------------------------------------------------|
| Halogen lamps             | 1                                                                                                        |
| Compact fluorescent lamps | 1,08                                                                                                     |
| LED lamps                 | $1 + 0,5 \times (1 - LLMF)$<br>where LLMF is the lumen maintenance factor at the end of the nominal life |

Table 8

Multiplication factors for LED lamps

| LED lamp beam angle                          | Luminous flux multiplication factor |
|----------------------------------------------|-------------------------------------|
| $20^\circ \leq \text{beam angle}$            | 1                                   |
| $15^\circ \leq \text{beam angle} < 20^\circ$ | 0,9                                 |
| $10^\circ \leq \text{beam angle} < 15^\circ$ | 0,85                                |
| $\text{beam angle} < 10^\circ$               | 0,80                                |

|       |                                                                                                                                                                                           |  |   |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---|
| 4.1.3 | Information to be made publicly available on free-access websites and in any other form the manufacturer deems appropriate                                                                |  | N |
| (a)   | The information specified in above point 4.1.2;                                                                                                                                           |  | N |
| (b)   | Rated power (0,1 W precision)                                                                                                                                                             |  | N |
| (c)   | Rated useful luminous flux                                                                                                                                                                |  | N |
| (d)   | Rated lamp life time                                                                                                                                                                      |  | N |
| (e)   | Lamp power factor                                                                                                                                                                         |  | N |
| (f)   | Lumen maintenance factor at the end of the nominal life (except for filament lamps)                                                                                                       |  | N |
| (g)   | Starting time (as X,X seconds)                                                                                                                                                            |  | N |
| (h)   | Colour rendering                                                                                                                                                                          |  | N |
| (i)   | Colour consistency (only for LEDs)                                                                                                                                                        |  | N |
| (j)   | Rated peak intensity in candela (cd)                                                                                                                                                      |  | N |
| (k)   | Rated beam angle                                                                                                                                                                          |  | N |
| (l)   | If intended for use in outdoor or industrial If intended for use in outdoor or industrial                                                                                                 |  | N |
| (m)   | Spectral power distribution in the range 180-800 nm                                                                                                                                       |  | N |
| 4.2   | Product information requirements for <b>non-directional lamps</b> (Annex II, cl.3 of EC 244/2009)                                                                                         |  | P |
|       | Information to be visibly displayed prior to purchase to end-users on the packaging and on free access websites. (It may be displayed using graphs, figures or symbols rather than text.) |  | P |

| COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012 |                                                                                                                                                                                                                                                                                                                                                                                                                                  |                 |         |
|-------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------|
| Clause                                                      | Requirement - Test                                                                                                                                                                                                                                                                                                                                                                                                               | Result - Remark | Verdict |
| (a)                                                         | When the nominal lamp power is displayed outside the energy label in accordance with Directive 98/11/EC, the nominal luminous flux of the lamp shall also be separately displayed in a font at least twice as large as the nominal lamp power display outside the label                                                                                                                                                          |                 | N       |
| (b)                                                         | Nominal life time of the lamp in hours (not higher than the rated life time)                                                                                                                                                                                                                                                                                                                                                     |                 | P       |
| (c)                                                         | Nominal life time of the lamp in hours (not higher than the rated life time)                                                                                                                                                                                                                                                                                                                                                     |                 | N       |
| (d)                                                         | Colour temperature (also expressed as a value in Kelvins);                                                                                                                                                                                                                                                                                                                                                                       |                 | P       |
| (e)                                                         | Warm-up time up to 60 % of the full light output (may be indicated as 'instant full light' if less than 1 second);                                                                                                                                                                                                                                                                                                               |                 | P       |
| (f)                                                         | A warning if the lamp cannot be dimmed or can be dimmed only on specific dimmers;                                                                                                                                                                                                                                                                                                                                                |                 | P       |
| (g)                                                         | If designed for optimal use in non-standard conditions (such as ambient temperature $T_a \neq 25^\circ\text{C}$ ), information on those conditions;                                                                                                                                                                                                                                                                              |                 | N       |
| (h)                                                         | Lamp dimensions in millimeters (length and diameter);                                                                                                                                                                                                                                                                                                                                                                            |                 | P       |
| (i)                                                         | If equivalence with an incandescent lamp is claimed on the packaging, the claimed equivalent incandescent lamp power (rounded to 1 W) shall be that corresponding in Table 6 to the luminous flux of the lamp contained in the packaging. The intermediate values of both the luminous flux and the claimed incandescent lamp power (rounded to 1W) shall be calculated by linear interpolation between the two adjacent values. |                 | N       |

| COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012 |                    |                 |         |
|-------------------------------------------------------------|--------------------|-----------------|---------|
| Clause                                                      | Requirement - Test | Result - Remark | Verdict |

Table 6

| Rated lamp luminous flux<br>$\Phi$ [lm] |         |                     | Claimed equivalent incandescent<br>lamp power |
|-----------------------------------------|---------|---------------------|-----------------------------------------------|
| CFL                                     | Halogen | LED and other lamps | [W]                                           |
| 125                                     | 119     | 136                 | 15                                            |
| 229                                     | 217     | 249                 | 25                                            |
| 432                                     | 410     | 470                 | 40                                            |
| 741                                     | 702     | 806                 | 60                                            |
| 970                                     | 920     | 1 055               | 75                                            |
| 1 398                                   | 1 326   | 1 521               | 100                                           |
| 2 253                                   | 2 137   | 2 452               | 150                                           |
| 3 172                                   | 3 009   | 3 452               | 200                                           |

|       |                                                                                                                                                                                                                                                               |  |   |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---|
| (j)   | The term ' <b>energy saving lamp</b> ' or any similar product related promotional statement about lamp efficacy may only be used if the lamp complies with the efficacy requirements applicable to non clear lamps in Stage 1 according to Tables 1, 2 and 3. |  | N |
| 4.2.2 | Information to be made publicly available on free-access websites. (information shall be expressed at least as values.)                                                                                                                                       |  | P |
| (a)   | The information specified in above point 4.2.1                                                                                                                                                                                                                |  | P |
| (b)   | Rated wattage (0,1 W precision);                                                                                                                                                                                                                              |  | P |
| (c)   | Rated luminous flux;                                                                                                                                                                                                                                          |  | P |
| (d)   | Rated lamp life time;                                                                                                                                                                                                                                         |  | P |
| (e)   | Lamp power factor;                                                                                                                                                                                                                                            |  | N |
| (f)   | Lumen maintenance factor at the end of the nominal life;                                                                                                                                                                                                      |  | P |
| (g)   | Starting time (as X,X seconds);                                                                                                                                                                                                                               |  | P |
| (h)   | Colour rendering.                                                                                                                                                                                                                                             |  | P |
| 4.3   | Additional product information requirements for <b>LED lamps replacing fluorescent lamps without integrated ballast</b> (Annex III, cl.3.2 of EU 1194/2012)                                                                                                   |  | N |
| 4.3.1 | In addition to the product information requirements according to point 3.1 of this Annex or point 3.1 of Annex II to Regulation (EC) No 244/2009, as from stage 1, manufacturers of                                                                           |  | N |

| COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012 |                                                                                                                                                                                                                                                                                                                                                     |                 |         |
|-------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------|
| Clause                                                      | Requirement - Test                                                                                                                                                                                                                                                                                                                                  | Result - Remark | Verdict |
|                                                             | LED lamps replacing fluorescent lamps without integrated ballast shall publish a warning on publicly available free-access websites and in any other form they deem appropriate that the overall energy efficiency and light distribution of any installation that uses such lamps are determined by the design of the installation.                |                 |         |
| 4.3.2                                                       | Claims that an LED lamp replaces a fluorescent lamp without integrated ballast of a particular wattage may be made only if:                                                                                                                                                                                                                         |                 | N       |
|                                                             | — the luminous intensity in any direction around the tube axis does not deviate by more than 25 % from the average luminous intensity around the tube, and                                                                                                                                                                                          |                 | N       |
|                                                             | — the luminous flux of the LED lamp is not lower than the luminous flux of the fluorescent lamp of the claimed wattage. The luminous flux of the fluorescent lamp shall be obtained by multiplying the claimed wattage with the minimum luminous efficacy value corresponding to the fluorescent lamp in Commission Regulation (EC) No 245/2009 and |                 | N       |
|                                                             | — the wattage of the LED lamp is not higher than the wattage of the fluorescent lamp it is claimed to replace.                                                                                                                                                                                                                                      |                 | N       |
|                                                             | The technical documentation file shall provide the data to support such claims.                                                                                                                                                                                                                                                                     |                 | N       |

|                  |                                       |                                                                     |                                |             |                |   |
|------------------|---------------------------------------|---------------------------------------------------------------------|--------------------------------|-------------|----------------|---|
| Table 2          | Maximum energy efficiency index (EEI) |                                                                     |                                |             |                | P |
| Type reference:  | AQ-36                                 |                                                                     |                                |             |                |   |
| Application date | Mains-voltage filament lamps          | Other filament lamps                                                | High-intensity discharge lamps | Other lamps | Measured Value |   |
| Stage 1          | If $\Phi_{use} > 450$ lm: 1,75        | If $\Phi_{use} \leq 450$ lm: 1.20<br>If $\Phi_{use} > 450$ lm: 0,95 | 0,50                           | 0,50        | N              |   |
| Stage 2          | 1.75                                  | 0.95                                                                | 0.50                           | 0.50        | N              |   |
| Stage 3          | 0.95                                  | 0.95                                                                | 0.36                           | 0.20        | N              |   |

|                                 |                                                                      |                                                      |                  |   |
|---------------------------------|----------------------------------------------------------------------|------------------------------------------------------|------------------|---|
| Table 3                         | Functionality requirements for directional compact fluorescent lamps |                                                      |                  | N |
| Type reference:                 |                                                                      |                                                      |                  |   |
| Functionality parameter         | Stage 1 except where indicated otherwise                             | Stage 3                                              | Measured Stage 1 |   |
| Lamp survival factor at 6 000 h | From 1 March 2014: $\geq 0,50$                                       | $\geq 0,70$                                          | N                |   |
| Lumen maintenance               | At 2 000 h: $\geq 80 \%$                                             | At 2 000 h: $\geq 83 \%$<br>At 6 000 h: $\geq 70 \%$ | N                |   |

Tel: (86)755-85277785

Fax: (86)755-23705230

E-mail: [postmaster@aoc-cert.com](mailto:postmaster@aoc-cert.com)Website: <http://www.aoc-cert.com>

TRF No. 1194/2012

| COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012 |                                                                                                                                 |                                                                                                                                 |         |
|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|---------|
| Clause                                                      | Requirement - Test                                                                                                              | Result - Remark                                                                                                                 | Verdict |
| Number of switching cycles before failure                   | $\geq$ half the lamp lifetime expressed in hours $\geq 10\,000$ if lamp starting time $> 0,3$ s                                 | $\geq$ lamp lifetime expressed in hours $\geq 30\,000$ if lamp starting time $> 0,3$ s                                          | N       |
| Starting time                                               | $< 2,0$ s                                                                                                                       | $< 1,5$ s if $P < 10$ W $< 1,0$ s if $P \geq 10$ W                                                                              | N       |
| Lamp warm-up time to 60 % $\Phi$                            | $< 40$ s or $< 100$ s for lamps containing mercury in amalgam form                                                              | $< 40$ s or $< 100$ s for lamps containing mercury in amalgam form                                                              | N       |
| Premature failure rate                                      | $\leq 5,0$ % at 500 h                                                                                                           | $\leq 5,0$ % at 1 000 h                                                                                                         | N       |
| Lamp power factor for lamps with integrated control gear    | $\geq 0,50$ if $P < 25$ W<br>$\geq 0,90$ if $P \geq 25$ W                                                                       | $\geq 0,55$ if $P < 25$ W<br>$\geq 0,90$ if $P \geq 25$ W                                                                       | N       |
| Colour rendering (Ra)                                       | $\geq 80$<br>$\geq 65$ if the lamp is intended for outdoor or industrial applications according to point 3.1.3(l) of this Annex | $\geq 80$<br>$\geq 65$ if the lamp is intended for outdoor or industrial applications according to point 3.1.3(l) of this Annex | N       |

|                                             |                                                                                                                                                                                             |                                                                |                  |   |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|------------------|---|
| Table 4                                     | Functionality requirements for other directional lamps (excluding LED lamps, compact fluorescent lamps and high-intensity discharge lamps)                                                  |                                                                |                  | N |
| Type reference:                             |                                                                                                                                                                                             |                                                                |                  |   |
| Functionality parameter                     | Stage 1 and 2                                                                                                                                                                               | Stage 3                                                        | Measured Stage 1 |   |
| Rated lamp lifetime at 50 % lamp survival   | $\geq 1\,000$ h ( $\geq 2\,000$ h in stage 2)<br>$\geq 2\,000$ h for extra low voltage lamps not complying with the stage 3 filament lamp efficiency requirement in point 1.1 of this Annex | $\geq 2\,000$ h<br>$\geq 4\,000$ h for extra low voltage lamps | N                |   |
| Lumen maintenance                           | $\geq 80$ % at 75 % of rated average lifetime                                                                                                                                               | $\geq 80$ % at 75 % of rated average lifetime                  | N                |   |
| Number of switching cycles                  | $\geq$ four times the rated lamp life expressed in hours                                                                                                                                    | $\geq$ four times the rated lamp life expressed in hours       | N                |   |
| Starting time                               | $< 0,2$ s                                                                                                                                                                                   | $< 0,2$ s                                                      | N                |   |
| Lamp warm-up time to 60 % $\Phi$            | $\leq 1,0$ s                                                                                                                                                                                | $\leq 1,0$ s                                                   | N                |   |
| Premature failure rate                      | $\leq 5,0$ % at 100 h                                                                                                                                                                       | $\leq 5,0$ % at 200 h                                          | N                |   |
| Lamp power factor for lamps with integrated | Power $> 25$ W: $\geq 0,9$<br>Power $\leq 25$ W: $\geq 0,5$                                                                                                                                 | Power $> 25$ W: $\geq 0,9$<br>Power $\leq 25$ W: $\geq 0,5$    | N                |   |

| COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012 |                    |                 |         |
|-------------------------------------------------------------|--------------------|-----------------|---------|
| Clause                                                      | Requirement - Test | Result - Remark | Verdict |

|              |  |  |  |
|--------------|--|--|--|
| control gear |  |  |  |
|--------------|--|--|--|

|                                                                 |                                                                                                                                      |                     |                  |
|-----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------------|
| Table 5                                                         | Functionality requirements for non-directional and directional LED lamps                                                             |                     | P                |
| Type reference:                                                 |                                                                                                                                      |                     |                  |
| Functionality parameter                                         | Requirements                                                                                                                         |                     | Measured Stage 3 |
| Lamp survival factor at 6 000 h:                                | From 1 March 2014: $\geq 0,90$                                                                                                       | See test data table | P                |
| Lumen Maintenance at 6 000 h:                                   | From 1 March 2014: $\geq 0,80$                                                                                                       | See test data table | P                |
| -Number of switching cycles before failure:                     | $\geq 15\ 000$ if rated lamp life $\geq 30\ 000$ h otherwise: $\geq$ half the rated lamp life expressed in hours                     | See test data table | P                |
| - Starting time:                                                | $< 0.5$ s                                                                                                                            | See test data table | P                |
| - Lamp warm-up time to 95% $\Phi$ :                             | $< 2$ s                                                                                                                              | See test data table | P                |
| - Premature failure rate:                                       | $\leq 5,0\%$ at 1 000 h                                                                                                              | See test data table | -                |
| -Colour rendering (Ra):                                         | $\geq 80$ ; $\geq 65$ if the lamp is intended for outdoor or industrial applications in accordance with point 3.1.3(l) of this Annex | See test data table | P                |
| -Colour consistency:                                            | Variation of chromaticity coordinates within a six-step MacAdam ellipse or less.                                                     | See test data table | P                |
| -Lamp power factor (PF) for lamps with integrated control gear: | $P \leq 2$ W: no requirement; $2$ W $< P \leq 5$ W: PF $> 0,4$ ; $5$ W $< P \leq 25$ W: PF $> 0,5$ ; $P > 25$ W: PF $> 0,9$          | See test data table | P                |



## Tables

| Table13A. Energy class                                                                                                                       |                                                                                                                                                                                                                                                                             |                                                                                                              |         |
|----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|---------|
| Standard                                                                                                                                     | Clause                                                                                                                                                                                                                                                                      | Model No.                                                                                                    | Verdict |
| EU 874/2012<br>EU 1194/2012                                                                                                                  | Energy class A+                                                                                                                                                                                                                                                             | AQ-36                                                                                                        | P       |
| Conditions                                                                                                                                   | -Test procedure:<br>Tungsten filament lamp-EN 60064;<br>CFL-EN 60969<br>LED lamp- IEC/PAS 62612<br>Tungsten halogen lamp-EN 60357<br>-test conditions:<br>-ambition: 25°C/65%R.H.<br>-Test voltage: 230V~                                                                   |                                                                                                              |         |
| Luminous Flux of the lamp                                                                                                                    | 3642.1 lm                                                                                                                                                                                                                                                                   |                                                                                                              |         |
| ((EU) No 874/2012<br>ANNEX VII)                                                                                                              | P <sub>cor</sub> is the rated power (P rated ) for models without external control gear and the rated power (P rated ) corrected in accordance with Table 2 for models with external control gear. The rated power of the lamps is measured at their nominal input voltage. |                                                                                                              |         |
| Table 2<br>Power correction if the model requires external control gear                                                                      |                                                                                                                                                                                                                                                                             |                                                                                                              |         |
| Scope of the correction                                                                                                                      |                                                                                                                                                                                                                                                                             | Power corrected for control gear losses (P <sub>cor</sub> )                                                  |         |
| Lamps operating on external halogen lamp control gear                                                                                        |                                                                                                                                                                                                                                                                             | P <sub>rated</sub> × 1,06                                                                                    |         |
| Lamps operating on external LED lamp control gear                                                                                            |                                                                                                                                                                                                                                                                             | P <sub>rated</sub> × 1,10                                                                                    |         |
| Fluorescent lamps of 16 mm diameter (T5 lamps) and 4-pin single capped fluorescent lamps operating on external fluorescent lamp control gear |                                                                                                                                                                                                                                                                             | P <sub>rated</sub> × 1,10                                                                                    |         |
| Other lamps operating on external fluorescent lamp control gear                                                                              |                                                                                                                                                                                                                                                                             | $P_{rated} \times \frac{0,24\sqrt{\Phi_{use}} + 0,0103\Phi_{use}}{0,15\sqrt{\Phi_{use}} + 0,0097\Phi_{use}}$ |         |
| Lamps operating on external high-intensity discharge lamp control gear                                                                       |                                                                                                                                                                                                                                                                             | P <sub>rated</sub> × 1,10                                                                                    |         |
| Lamps operating on external low pressure sodium lamp control gear                                                                            |                                                                                                                                                                                                                                                                             | P <sub>rated</sub> × 1,15                                                                                    |         |
| P <sub>ref</sub> ((EU) No 874/2012<br>ANNEX VII)                                                                                             | P <sub>ref</sub> is the reference power obtained from the useful luminous flux of the model (Φ use ) by the following formulae:<br>For models with Φ use < 1 300 lumen: P ref = 0,88 √ Φ use + 0,049 Φ use<br>For models with Φ use ≥ 1 300 lumen: P ref = 0,07341 Φ use    |                                                                                                              |         |

## Tables

|                                                                                  |          |                                                                                                                                                                                             |               |                                                                  |               |
|----------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------------------------------------------|---------------|
| The useful luminous flux ( $\Phi_{use}$ ) is defined in accordance with Table 3. |          | Table 3<br>Definition of the useful luminous flux                                                                                                                                           |               |                                                                  |               |
|                                                                                  |          | Model                                                                                                                                                                                       |               | Useful luminous flux ( $\Phi_{use}$ )                            |               |
|                                                                                  |          | Non-directional lamps                                                                                                                                                                       |               | Total rated luminous flux ( $\Phi$ )                             |               |
|                                                                                  |          | Directional lamps with a beam angle $\geq 90^\circ$ other than filament lamps and carrying a textual or graphical warning on their packaging that they are not suitable for accent lighting |               | Rated luminous flux in a $120^\circ$ cone ( $\Phi_{120^\circ}$ ) |               |
|                                                                                  |          | Other directional lamps                                                                                                                                                                     |               | Rated luminous flux in a $90^\circ$ cone ( $\Phi_{90^\circ}$ )   |               |
| Technical requirements                                                           |          | Test result                                                                                                                                                                                 |               |                                                                  |               |
| EEI=Pcor/Pref                                                                    |          | For non-direction lamp                                                                                                                                                                      |               | For direction lamp                                               |               |
| EEI=Pcor/Pref<br>=35.54*1.1W/267.37                                              |          | A++                                                                                                                                                                                         | EEI≤0.11      | A++                                                              | EEI≤0.13      |
|                                                                                  |          | A+                                                                                                                                                                                          | 0.11<EEI≤0.17 | A+                                                               | 0.13<EEI≤0.18 |
|                                                                                  |          | A                                                                                                                                                                                           | 0.17<EEI≤0.24 | A                                                                | 0.18<EEI≤0.40 |
|                                                                                  |          | B                                                                                                                                                                                           | 0.24<EEI≤0.60 | B                                                                | 0.40<EEI≤0.95 |
|                                                                                  |          | C                                                                                                                                                                                           | 0.60<EEI≤0.80 | C                                                                | 0.95<EEI≤1.20 |
|                                                                                  |          | D                                                                                                                                                                                           | 0.80<EEI≤0.95 | D                                                                | 1.20<EEI≤1.75 |
|                                                                                  |          | E                                                                                                                                                                                           | 0.95<EEI      | E                                                                | 1.75<EEI      |
| Energy class                                                                     | EEI=0.15 | A+                                                                                                                                                                                          |               | --                                                               |               |

## Tables

## Test result

| Sample No. | Starting time (s) | Lamp warm-up time to 95 % $\Phi$ | Switching Cycle | Premature Failure Rate 1000h | Power (W) | Power Factor | Luminous Flux total (lm) | Efficacy (lm/W) | Color Temp (CCT) | Color rendering (Ra) | SDC M | Luminous flux (lm) After 6000h | Lumen Maintenance (%) | Lamp survival factor at 6000h |
|------------|-------------------|----------------------------------|-----------------|------------------------------|-----------|--------------|--------------------------|-----------------|------------------|----------------------|-------|--------------------------------|-----------------------|-------------------------------|
| 1          | 0.120             | 0.172                            | 25000           | 0                            | 35.21     | 0.918        | 3575.2                   | 101.5           | 7040             | 82.0                 | 2.9   | 3246.0                         | 90.79%                | 100%                          |
| 2          | 0.128             | 0.147                            | 25000           | 0                            | 35.98     | 0.913        | 3661.1                   | 101.8           | 6888             | 82.0                 | 2.8   | 3374.4                         | 92.17%                | 100%                          |
| 3          | 0.122             | 0.146                            | 25000           | 0                            | 36.02     | 0.913        | 3694.4                   | 102.6           | 7206             | 83.1                 | 3.2   | 3383.7                         | 91.59%                | 100%                          |
| 4          | 0.118             | 0.169                            | 25000           | 0                            | 35.91     | 0.925        | 3603.5                   | 100.3           | 7000             | 82.8                 | 3.3   | 3324.6                         | 92.26%                | 100%                          |
| 5          | 0.121             | 0.128                            | 25000           | 0                            | 35.46     | 0.915        | 3621.3                   | 102.1           | 6952             | 81.9                 | 2.6   | 3330.3                         | 91.96%                | 100%                          |
| 6          | 0.122             | 0.134                            | 25000           | 0                            | 35.98     | 0.919        | 3614.7                   | 100.5           | 7029             | 82.8                 | 3.3   | 3255.4                         | 90.06%                | 100%                          |
| 7          | 0.118             | 0.144                            | 25000           | 0                            | 35.56     | 0.929        | 3619.9                   | 101.8           | 7021             | 82.7                 | 3.0   | 3359.2                         | 92.80%                | 100%                          |
| 8          | 0.110             | 0.124                            | 25000           | 0                            | 35.06     | 0.929        | 3575.3                   | 102.0           | 6822             | 82.7                 | 2.4   | 3276.4                         | 91.64%                | 100%                          |
| 9          | 0.103             | 0.151                            | 25000           | 0                            | 34.85     | 0.936        | 3572.3                   | 102.5           | 7214             | 82.1                 | 2.7   | 3212.3                         | 89.92%                | 100%                          |
| 10         | 0.099             | 0.136                            | 25000           | 0                            | 35.53     | 0.927        | 3679.8                   | 103.6           | 7204             | 83.1                 | 2.6   | 3322.1                         | 90.28%                | 100%                          |
| 11         | 0.117             | 0.153                            | 25000           | 0                            | 35.58     | 0.938        | 3624.6                   | 101.9           | 7023             | 82.8                 | 3.4   | 3321.0                         | 91.62%                | 100%                          |
| 12         | 0.139             | 0.167                            | 25000           | 0                            | 35.88     | 0.918        | 3644.0                   | 101.6           | 7071             | 82.0                 | 3.3   | 3287.2                         | 90.21%                | 100%                          |
| 13         | 0.158             | 0.149                            | 25000           | 0                            | 35.17     | 0.900        | 3595.3                   | 102.2           | 6914             | 83.0                 | 3.4   | 3336.5                         | 92.80%                | 100%                          |
| 14         | 0.153             | 0.160                            | 25000           | 0                            | 35.42     | 0.914        | 3695.2                   | 104.3           | 7083             | 81.9                 | 3.3   | 3394.8                         | 91.87%                | 100%                          |
| 15         | 0.154             | 0.149                            | 25000           | 0                            | 35.00     | 0.918        | 3698.5                   | 105.7           | 7023             | 83.1                 | 3.4   | 3378.0                         | 91.33%                | 100%                          |
| 16         | 0.137             | 0.126                            | 25000           | 0                            | 34.73     | 0.912        | 3669.5                   | 105.6           | 7021             | 82.8                 | 3.4   | 3374.6                         | 91.96%                | 100%                          |
| 17         | 0.141             | 0.139                            | 25000           | 0                            | 36.38     | 0.939        | 3698.4                   | 101.7           | 7056             | 81.9                 | 3.3   | 3404.2                         | 92.05%                | 100%                          |
| 18         | 0.164             | 0.172                            | 25000           | 0                            | 35.59     | 0.918        | 3694.1                   | 103.8           | 7172             | 82.8                 | 3.2   | 3373.9                         | 91.33%                | 100%                          |
| 19         | 0.137             | 0.157                            | 25000           | 0                            | 35.49     | 0.913        | 3700.6                   | 104.3           | 7063             | 82.1                 | 3.3   | 3348.7                         | 90.49%                | 100%                          |
| 20         | 0.122             | 0.156                            | 25000           | 0                            | 36.01     | 0.919        | 3604.5                   | 100.1           | 7142             | 81.9                 | 3.2   | 3280.1                         | 91.00%                | 100%                          |
| Avg.       | 0.129             | 0.149                            | 25000           | 0                            | 35.54     | 0.921        | 3642.1                   | 102.5           | 7047             | 82.5                 | 3.1   | 3329.2                         | 91.41%                | 100%                          |

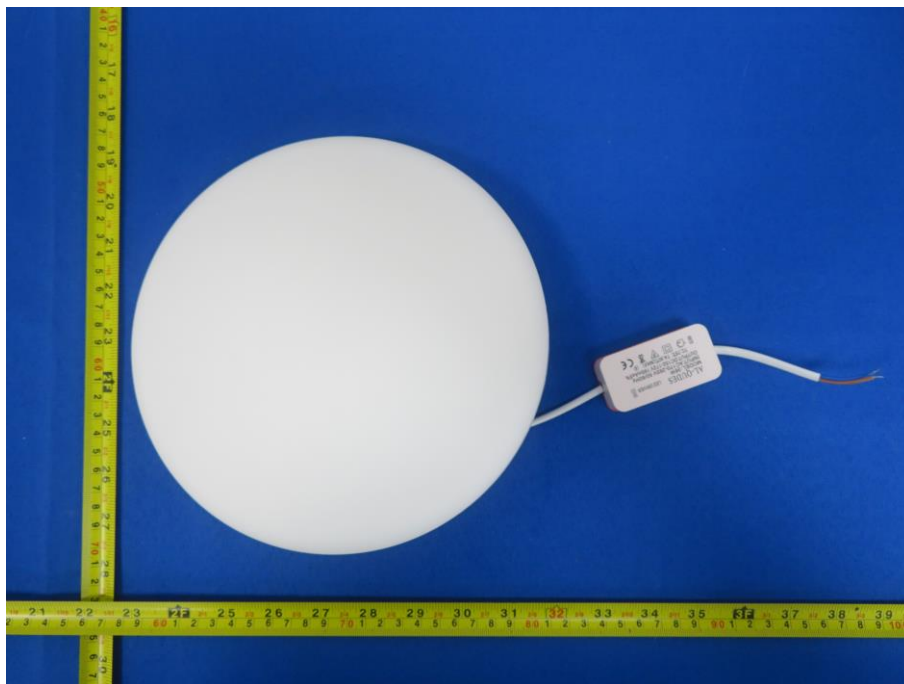
*Pictures*

Fig.1

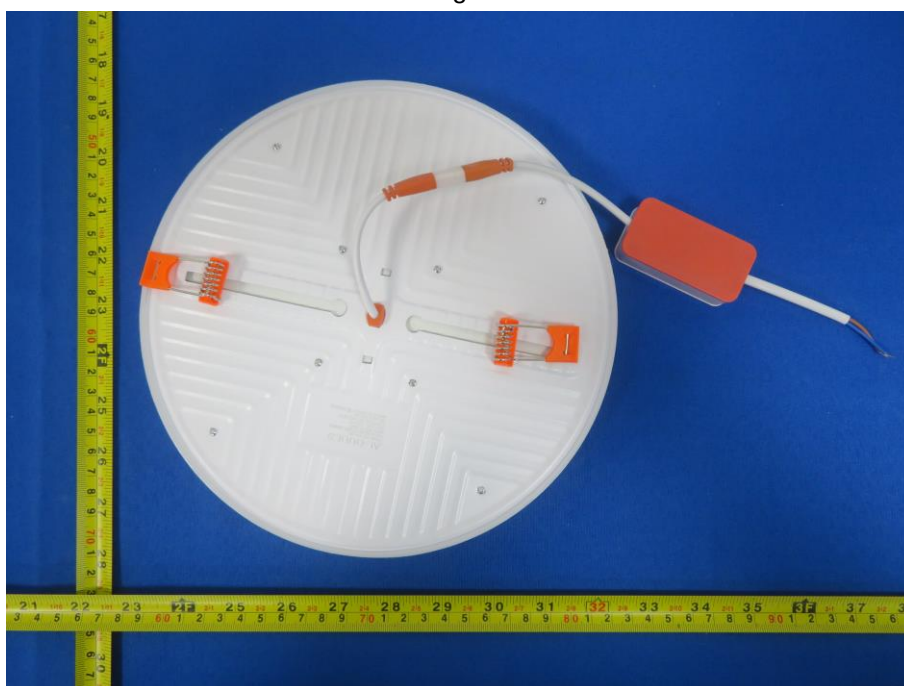


Fig.2

- End of report -