



TEST REPORT
IEC 60598-2-21
Part 2: Particular requirements
Section 21: Rope Lights

Report Number.....: AOC251105004S

Date of issue.....: 2025-11-10

Total number of pages.....: 46 pages

Name of Testing Laboratory preparing the Report.....: Shenzhen AOCE Electronic Technology Service Co., Ltd
Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China

Applicant's name MAHMOUD HOSNI DAKHLALLAH COMPANY AND PARTNER

Address JORDAN IRBID ALNSEM CIRCLE

Test specification:

Standard.....: ☒ IEC 60598-2-21:2014

☒ IEC 60598-1:2020

Test procedure CE-LVD

Non-standard test method N/A

Test Report Form No.: IEC60598_2_21D

Test Report Form(s) Originator: DEKRA Certification B.V.

Master TRF.....: 2021-09-16

Copyright © 2021 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.


This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the Testing Laboratory, responsible for this Test Report.

Test item description	LED STRIP	
Trade Mark		
Manufacturer	MAHMOUD HOSNI DAKHLALLAH COMPANY AND PARTNER JORDAN IRBID ALNSEM CIRCLE	
Model/Type reference.....	MAR-STRIP-100	
Ratings.....	220-240V~, 50/60Hz, 6 W, Class II, IP 20, ta:25°C	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
☒	Testing Laboratory:	Shenzhen AOCE Electronic Technology Service Co., Ltd
Testing location/ address		Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
Tested by (name, function, signature)		ZhiCong Xian Technical Engineer 
Approved by (name, function, signature) ..		Robin Liu Technical Manager 
☐	Testing procedure: CTF Stage 1:	N/A
Testing location/ address		
Tested by (name, function, signature)		
Approved by (name, function, signature) ..		
☐	Testing procedure: CTF Stage 2:	N/A
Testing location/ address		
Tested by (name + signature).....		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) ..		
☐	Testing procedure: CTF Stage 3:	N/A
☐	Testing procedure: CTF Stage 4:	N/A
Testing location/ address		
Tested by (name, function, signature)		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) ..		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment): Attachment No.1: Photo document.	
Summary of testing:	
Tests performed (name of test and test clause): - All test were performed on MAR-STRIP-100.	Testing location: Shenzhen AOCE Electronic Technology Service Co., Ltd Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
Summary of compliance with National Differences (List of countries addressed): N/A	
Statement concerning the uncertainty of the measurement systems used for the tests (may be required by the product standard or client)	

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBS that own these marks.



Test item particulars..... :	
Classification of installation and use..... :	Rope lights and for indoor use only
Supply Connection	Supply cord with plug
Possible test case verdicts:	
- test case does not apply to the test object..... :	N/A
- test object does meet the requirement..... :	P (Pass)
- test object does not meet the requirement..... :	F (Fail)
Testing..... :	
Date of receipt of test item	2025-10-20
Date (s) of performance of tests	2025-10-20 to 2025-11-10
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a ☐ comma / ☒ point is used as the decimal separator. Clause numbers between brackets refer to clauses in IEC 60598-1	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided :	☐ Yes ☒ Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies) : Same as manufacturer	

General product information:

- The lighting chains equipped with non-replaceable lighting source.

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.4 (0)	GENERAL TEST REQUIREMENTS		P
21.4 (0.3)	More sections applicable	Yes ☐ No ☒ Section/s:	—
21.4 (0.5)	Components	(see Annex 1)	—
21.4 (0.7)	Information for luminaire design in light sources standards		
21.4 (0.7.2)	Light source safety standard	IEC 62031	
	Luminaire design in the light source safety standard		

21.5 (2)	CLASSIFICATION		P
21.5 (2.2)	Type of protection	Class II	P
21.5 (2.3)	Degree of protection	IP 20	P
21.5 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces	Yes ☒ No ☐	—
21.5 (2.5)	Luminaire for normal use	Yes ☒ No ☐	—
	Luminaire for rough service	Yes ☐ No ☒	—
21.5.2 (-)	Class II or Class III	Class II	P
21.5.3 (-)	Rope lights for outdoor use shall be IP44 or higher		N/A

21.6 (3)	MARKING		P
21.6 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
21.6 (3.3)	Additional information		P
	Language of instructions	English	P
21.6 (3.3.1)	Combination luminaires		N/A
21.6 (3.3.2)	Nominal frequency in Hz	50/60 Hz	P
21.6 (3.3.3)	Operating temperature		N/A
21.6 (3.3.4)	Symbol or warning notice		N/A
21.6 (3.3.5)	Wiring diagram		N/A
21.6 (3.3.6)	Special conditions		N/A
21.6 (3.3.7)	Metal halide lamp luminaire – warning		N/A
21.6 (3.3.8)	Limitation for semi-luminaires		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.6 (3.3.9)	Power factor and supply current		P
21.6 (3.3.10)	Suitability for use indoors		N/A
21.6 (3.3.11)	Luminaires with remote control		N/A
21.6 (3.3.12)	Clip-mounted luminaire – warning		N/A
21.6 (3.3.13)	Specifications of protective shields		N/A
21.6 (3.3.14)	Symbol for nature of supply	~	P
21.6 (3.3.15)	Rated current of socket outlet		N/A
21.6 (3.3.16)	Rough service luminaire		N/A
21.6 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments	Type Z	P
21.6 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
21.6 (3.3.19)	Protective conductor current in instruction if applicable		N/A
21.6 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		P
21.6 (3.3.21)	Non replaceable and non-user replaceable light sources information provided	Non replaceable light sources	P
	Cautionary symbol		N/A
21.6 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
21.6 (3.3.23)	Luminaires delivered without controlgear necessary information provided		N/A
21.6 (3.3.24)	Information when terminal block not supplied with the luminaire		N/A
21.6 (3.3.25)	Information protection for on-site mains wiring against UV		N/A
21.6 (3.3.26)	Instructions fixed wall mounted and portable wall mounted luminaires		N/A
21.6 (3.4)	Test with water	15s	P

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Test with hexane	15s	P
	Legible after test		P
	Label attached		P
21.6.2 (-)	Rope light marking		P
	Rated voltage and wattage marked on the rope light		P
	Durable non-removable label if information on the cable		P
21.6.3 (-)	Rope light and packing marking		P
	Marking if only for indoor use		P
21.6.4 (-)	Marking on the packing or instructions		P
	Marking a) – e)		P

21.7 (4)	CONSTRUCTION		P
21.7 (4.2)	Components replaceable without difficulty		N/A
21.7 (4.3)	Wireways smooth and free from sharp edges		P
21.7 (4.4)	Lampholders		N/A
21.7 (4.4.1)	Integral lampholder		N/A
21.7 (4.4.2)	Wiring connection		N/A
21.7 (4.4.3)	Lampholder for end-to-end mounting		N/A
21.7 (4.4.4)	Positioning		N/A
	- pressure test (N):		—
	After test the lampholder comply with relevant standard sheets and show no damage		N/A
	After test on single-capped lampholder the lampholder have not moved from its position and show no permanent deformation		N/A
	- bending test (N):		—
	After test the lampholder have not moved from its position and show no permanent deformation		N/A
21.7 (4.4.5)	Peak pulse voltage		N/A
21.7 (4.4.6)	Centre contact		N/A
21.7 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
21.7 (4.4.8)	Lamp connectors		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7 (4.4.9)	Caps and bases correctly used		N/A
21.7 (4.4.10)	Light source for lampholder or connection according IEC 60061 not connected another way		N/A
21.7 (4.5)	Starter holders		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
21.7 (4.7)	Terminals and supply connections		P
21.7 (4.7.1)	Contact to metal parts		N/A
21.7 (4.7.2)	Test 8 mm live conductor		N/A
	Test 8 mm earth conductor		N/A
21.7 (4.7.3)	Terminals for supply conductors		P
21.7 (4.7.3.1)	Welded method and material		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		N/A
	- electrical test according to 15.6.3		N/A
	- heat test according to 15.6.2.3 and 15.6.2.4		N/A
21.7 (4.7.4)	Terminals other than supply connection		N/A
21.7 (4.7.5)	Heat-resistant wiring/sleeves		N/A
21.7 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A
21.7 (4.8)	Switches		N/A
	- adequate rating		N/A
	- adequate fixing		N/A
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		N/A
21.7 (4.9)	Insulating lining and sleeves		N/A
21.7 (4.9.1)	Retainment		N/A
	Method of fixing		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7 (4.9.2)	Insulated linings and sleeves:		N/A
	Resistant to a temperature > 20 °C to the wire temperature or		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C):		N/A
21.7 (4.10)	Double or reinforced insulation		P
21.7 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		P
	Safe installation fixed luminaires		P
	Capacitors and switches		N/A
	Interference suppression capacitors according to IEC 60384-14		N/A
21.7 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
21.7 (4.10.3)	Retainment of insulation:		P
	- fixed		P
	- unable to be replaced; luminaire inoperative		P
	- sleeves retained in position		P
	- lining in lampholder		N/A
21.7 (4.11)	Electrical connections and current-carrying parts		P
21.7 (4.11.1)	Contact pressure		P
21.7 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
21.7 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
21.7 (4.11.4)	Material of current-carrying parts		P

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7 (4.11.5)	No contact to wood or mounting surface		P
21.7 (4.11.6)	Electro-mechanical contact systems		N/A
21.7 (4.12)	Screws and connections (mechanical) and glands		N/A
21.7 (4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
21.7 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
21.7 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm)		N/A
	- lampholder; torque (Nm)		N/A
	- push-button switches; torque 0,8 Nm.....:		N/A
21.7 (4.12.5)	Screwed glands; force (Nm).....:		N/A
21.7 (4.13)	Mechanical strength		P
21.7 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm)		N/A
	- other parts; energy (Nm)	0.5 Nm	P
	1) live parts		P
	2) linings		N/A
	3) protection		P
	4) covers		P
21.7 (4.13.3)	Straight test finger		P
21.7 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
21.7 (4.13.6)	Tumbling barrel		N/A
21.7 (4.14)	Suspensions, fixings and means of adjusting		N/A
21.7 (4.14.1)	Mechanical load:		N/A
	A) four times the weight		N/A
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm).....:		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		N/A
	Metal rod. diameter (mm)		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
21.7 (4.14.2)	Load to flexible cables		N/A
	Mass (kg)		—
	Stress in conductors (N/mm ²)		N/A
	Mass (kg) of semi-luminaire		N/A
	Bending moment (Nm) of semi-luminaire		N/A
21.7 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles.....:		N/A
	- strands broken.....:		N/A
	- electric strength test afterwards		N/A
21.7 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
21.7 (4.14.5)	Guide pulleys		N/A
21.7 (4.14.6)	Strain on socket-outlets		N/A
21.7 (4.15)	Flammable materials		P

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- glow-wire test 650°C	See Test Table 21.16 (13.3.2)	P
	- spacing ≥ 30 mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		P
	- thermal protection		N/A
	- electronic circuits exempted		N/A
21.7 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
21.7 (4.16)	Luminaires for mounting on normally flammable surfaces		P
	No lamp control gear	(compliance with Section 12)	N/A
21.7 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
21.7 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
21.7 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
21.7 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
21.7 (4.18)	Resistance to corrosion		N/A
21.7 (4.18.1)	- rust-resistance		N/A
21.7 (4.18.2)	- season cracking in copper		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7 (4.18.3)	- corrosion of aluminium		N/A
21.7 (4.19)	Ignitors compatible with ballast		N/A
21.7 (4.20)	Rough service vibration		N/A
21.7 (4.21)	Protective shield		N/A
21.7 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A
21.7 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
21.7 (4.21.3)	No direct path		N/A
21.7 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment.....:	See Test Table 21.16 (13.3.2)	N/A
21.7 (4.22)	Attachments to lamps not cause overheating or damage		N/A
21.7 (4.23)	Semi-luminaires comply Class II		N/A
21.7 (4.24)	Photobiological hazards		P
21.7 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
21.7 (4.24.2)	Retinal blue light hazard		P
	Luminaires with E_{thr} :		N/A
	a) Fixed luminaires		N/A
	- distance x m, borderline between RG1 and RG2 ..:		N/A
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		N/A
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
21.7 (4.25)	Mechanical hazard		P
	No sharp point or edges		P
21.7 (4.26)	Short-circuit protection		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7 (4.26.1)	Adequate means of uninsulated accessible SELV parts		N/A
21.7 (4.26.2)	Short-circuit test with test chain according 4.26.3		N/A
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
21.7 (4.27)	Terminal blocks with integrated screwless earthing contacts		N/A
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Voltage drop test, resistance < 0,05 Ω		N/A
21.7 (4.28)	Fixing of thermal sensing control		N/A
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material ($^{\circ}\text{C}$):		—
	100 cycles between t min and t max		N/A
	Temperature sensing control still in position		N/A
21.7 (4.29)	Luminaires with non-replaceable light source		P
	Not possible to replace light source		P
	Live part not accessible after parts have been opened by hand or tools		N/A
21.7 (4.30)	Luminaires with non-user replaceable light source		N/A
	If protective cover provide protection against electric shock and marked with "caution, electric shock risk" symbol:		N/A
	Minimum two fixing means		N/A
21.7 (4.31)	Insulation between circuits		P

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		P
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
21.7 (4.31.1)	SELV circuits		N/A
	Used SELV source		N/A
	Voltage $\leq$ ELV		N/A
	Insulating of SELV circuits from LV supply		N/A
	Insulating of SELV circuits from other non SELV circuits		N/A
	Insulating of SELV circuits from FELV		N/A
	Insulating of SELV circuits from other SELV circuits		N/A
	SELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to enter socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
21.7 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage $\leq$ ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to enter socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets does not have protective conductor contact		N/A
21.7 (4.31.3)	Other circuits		P

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Other circuits insulated from accessible parts according Table X.1		P
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
21.7 (4.32)	Overvoltage protective devices		N/A
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		
	- only in fixed luminaires		N/A
	- only connected to protective earth		N/A
21.7 (4.33)	Luminaire powered via information technology communication cabling		N/A
	Luminaire powered via IT communication cabling complies with class III requirements		N/A
	Rated voltage within the range of ES1 and not exceed max. voltage used connector		N/A
	Luminaire in line with limits electric parameters PSE		N/A
	No hazard when supplied with		N/A
	- 130 % rated input voltage > 5 V (minimum 7,5 V)		N/A
	- 150 % rated in put voltage ≤ 5 V		N/A
21.7 (4.34)	Electromagnetic fields (EMF)		P
	Comply with IEC 62493:2015		P
21.7 (4.35)	Protection against moving fan blades		N/A
	No contact to the fan blade with relevant test probe		N/A
	Fan has leading edges and tips rounded with a radius of not less than 0,5 mm and:		N/A
	- hardness less than D60 Shore, or		N/A
	- peripheral speed less than 15 m/s, or		N/A
	- input power not exceeding 2 W		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7 (4.36)	Track-mounted luminaires		N/A
	Comply with Annex A of IEC 60570:2003/AMD2:2019		N/A
21.7.2 (-)	Terminal blocks		N/A
	Clause 4.6 of IEC 60598-1 referring to terminal blocks does not apply		—
21.7.3 (-)	Terminals and supply connections		N/A
	Comply with Annex A		N/A
21.7.4 (-)	Control units		P
	Forming an integral part enclosed in non-flammable insulating material tested according 21.16		P
	Securely fixed to the cable		P
	Electronic control device comply with IEC 61347-2-11		P
	LED driver comply with IEC 61347-2-13		N/A
21.7.5 (-)	Mechanical strength		-
	a) Rigid rope lights		Not checked
	1) Pull test: force 60 N		Not checked
	2) Torque test: torque 0,15 Nm		Not checked
	b) Flexible rope lights		Not checked
	1) Pull test: force 60 N		Not checked
	2) Torque test: torque 0,15 Nm		Not checked
	3) Cylinder 150 mm at 10 times at 25 °C ± 2 °C		Not checked
	For rope lights having an IP number over X0 Additionally: Cylinder 150 mm at 10 times at -15 °C ± 2 °C		Not checked
	4) Mandrel of between 4 and 5 times the diameter of test piece		Not checked
	c) Impact test at low temperature of -15 °C ± 5 °C		Not checked

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.8 (11)	CREEPAGE DISTANCES AND CLEARANCES		P
21.8 (11.2.1)	Impulse withstand category (Normal category II)	Category II ☒ Category III ☐	P
	Category III according Annex U		—
	Protected against pollution, reduced creepage and clearance according Annex P of IEC 61347-1		—
21.8 (11.2.2)	Creepage distances for frequency up to 30 kHz	See Test Table 21.8 (11.2) I	P
	Creepage distances for frequency over 30 kHz:		N/A
	- Controlgear marked with $\hat{U}_{OUT}$ and f_{UOUT} according IEC 61347-1, clause 7.1, item w	See Test Table 21.8 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 21.8 (11.2) II	N/A
21.8 (11.2.3)	Clearances for frequency up to 30 kHz	See Test Table 21.8 (11.2) I	P
	Clearances distances for frequency over 30 kHz:		N/A
	- Controlgear marked with U_P	See Test Table 21.8 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 21.8 (11.2) II	N/A
21.10 (14)	SCREW TERMINALS		N/A
	Separately approved; component list	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 3)	N/A
21.10 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		N/A
	Separately approved; component list	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 4)	N/A
21.11 (5)	EXTERNAL AND INTERNAL WIRING		P
21.11 (5.2)	Supply connection and external wiring		P
21.11 (5.2.1)	Means of connection	Non-detachable supply cord with plug	P
	Outdoor luminaire has not PVC insulated external wiring if not class III or SELV ≤ 25 V a.c./60 V d.c. or protected from outdoor environment		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.11 (5.2.2)	Type of cable	Replaced by 21.11.2	—
	Nominal cross-sectional area (mm ²)	Replaced by 21.11.2	—
	Cables equal to IEC 60227 or IEC 60245	Replaced by 21.11.2	—
21.11 (5.2.3)	Type of attachment, X, Y or Z	Type Z	P
21.11 (5.2.5)	Type Z not connected to screws		P
21.11 (5.2.6)	Cable entries:		P
	- suitable for introduction		P
	- adequate degree of protection		P
21.11 (5.2.7)	Cable entries through rigid material have rounded edges		P
21.11 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
21.11 (5.2.9)	Locking of screwed bushings		N/A
21.11 (5.2.10)	Cord anchorage:		P
	- covering protected from abrasion		P
	- clear how to be effective		P
	- no mechanical or thermal stress		P
	- no tying of cables into knots etc.		P
	- insulating material or lining		N/A
21.11 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
21.11 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment	Type Z	P
21.11 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe		P
	- pull test: 25 times; pull (N).....: 60N		P
	- torque test: torque (Nm): 0.15Nm		P
	- displacement ≤ 2 mm	0.2mm	P
	- no movement of conductors		P
	- no damage of cable or cord		P
	- function independent of electrical connection		N/A
21.11 (5.2.10.4)	Tests:		N/A
	- pull test: 30N for 1 min		N/A
	- no movement of conductors		N/A
	- no disconnection when soldered		N/A
	- impossible to push cable; unsafe		N/A
21.11 (5.2.11)	External wiring passing into luminaire		N/A
21.11 (5.2.12)	Looping-in terminals		N/A
21.11 (5.2.13)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		P
21.11 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A
21.11 (5.2.15)	Class III luminaire powered via IT communication cabling connectors (IEC 60603 or IEC 62680)		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.11 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Other appliance inlet or connector according relevant IEC standard		N/A
21.11 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
21.11 (5.2.18)	Used plug in accordance with		N/A
	- IEC 60083		N/A
	- other standard		N/A
21.11 (5.3)	Internal wiring		N/A
21.11 (5.3.1)	Internal wiring of suitable size and type		N/A
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A)		N/A
	- temperatures (see Annex 2)		N/A
	Green-yellow for earth only		N/A
21.11 (5.3.1.1)	Internal wiring connected directly to fixed wiring		N/A
	Cross-sectional area (mm ²)		N/A
	Insulation thickness		N/A
	Extra insulation added where necessary		N/A
21.11 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		N/A
	Adequate cross-sectional area and insulation thickness		N/A
21.11 (5.3.1.3)	Double or reinforced insulation for class II		N/A
21.11 (5.3.1.4)	Conductors without insulation		N/A
21.11 (5.3.1.5)	SELV current-carrying parts		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.11 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
21.11 (5.3.2)	Sharp edges etc.		N/A
	No moving parts of switches etc.		N/A
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		N/A
21.11 (5.3.3)	Insulating bushings:		N/A
	- suitable fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- cables with protective sheath		N/A
21.11 (5.3.4)	Joints and junctions effectively insulated		N/A
21.11 (5.3.5)	Strain on internal wiring		N/A
21.11 (5.3.6)	Wire carriers		N/A
21.11 (5.3.7)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		N/A
3.10 (5.4)	Test to determine suitability of conductors having a reduced cross-sectional area		N/A
	Under test the temperature of the luminaire wiring insulation not exceed the limits stated in Table 12.2	(see Annex 2)	N/A
	No damage to luminaire wiring after test		N/A
21.11.2 (-)	Cables for rope lights		P
	Type of cable :		P
	Cables not lighter than IEC 60227 or IEC 60245 for class II rope lights		P
	Cables not lighter than insulation according to 5.3.1 of part 1 for class III rope lights		N/A
	Nominal cross-sectional area (mm²) :		P
	Mechanical properties according 4.14.1 and 4.14.2 of part 1		P

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.11.3 (-)	Cord anchorage test		N/A
	Pull test 30 N 25 times on single-core cable		N/A
21.11.4 (-)	Plugs and cable length		N/A
	Splash-proof plug or permanent connection if for outdoor use		N/A
	Length of the cable between the plug and the connection to the rope light not less than 1,5 m		N/A
21.11.5 (-)	Maximum length of extendable class II rope lights		N/A
	Maximum length 100 m for 0,5 mm ² cable		N/A
	Maximum length 150 m for 0,75 mm ² cable		N/A

21.12 (8)	PROTECTION AGAINST ELECTRIC SHOCK		P
21.12 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		N/A
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		N/A
	Lamp and starterholders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N/A
	Basic insulation only accessible under lamp or starter replacement		N/A
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		P
	Double-ended high pressure discharge lamp		N/A
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
21.12 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
21.12 (8.2.3.a)	Class II luminaire:		P

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- basic insulated metal parts not accessible during starter or lamp replacement		N/A
	- basic insulation not accessible other than during starter or lamp replacement		N/A
	- glass protective shields not used as supplementary insulation		N/A
21.12 (8.2.3.b)	BC lampholder of metal in class I luminaires shall be earthed		N/A
21.12 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- touch current		N/A
	- no-load voltage		N/A
	Other than ordinary luminaire:		N/A
	- nominal voltage		N/A
21.12 (8.2.4)	Portable luminaire have protection independent of supporting surface		N/A
21.12 (8.2.5)	Compliance with the standard test finger or relevant probe		P
21.12 (8.2.6)	Covers reliably secured		P
21.12 (8.2.7)	Discharging of capacitors $\geq 0,5 \mu\text{F}$	No capacitors used	N/A
	Portable plug connected luminaire with capacitor		N/A
	Other plug connected luminaire with capacitor		N/A
	Discharge device on or within capacitor		N/A
	Discharge device mounted separately		N/A

21.13 (12)	ENDURANCE TEST AND THERMAL TEST		P
21.13.1 (-)	If IP > IP 20 relevant test of (12.4), (12.5) and (12.6) after (9.2) before (9.3) specified in 21.14		P
21.13 (12.3)	Endurance test:		P
	- mounting-position		—
	- test temperature (°C).....		—
	- total duration (h)		—

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- supply voltage: Un factor; calculated voltage (V) ...:		—
	- lamp used.....:		—
21.13 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P
21.13 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
21.13 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	P
21.13 (12.6)	Thermal test (failed lamp control gear condition):		N/A
21.13 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		—
	- case of abnormal conditions		—
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un		—
	- measured mounting surface temperature (°C) at 1,1 Un		N/A
	- calculated mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
21.13 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions		—
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C).....:		N/A
	- track-mounted luminaires		N/A
21.13 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N/A
21.13 (12.7.1)	Luminaire without temperature sensing control		N/A
21.13 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Test method 12.7.1.1 or Annex W		—
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions		—
	- Ballast failure at supply voltage (V)		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions		—
	- measured winding temperature (°C): at 1,1 Un		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un.....		—
	- calculated temperature of fixing point/exposed part (°C)		—
	Ball-pressure test..... :	See Table 21.16 (13.2.1)	N/A
21.13 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		N/A
	- case of abnormal conditions		—
	- measured winding temperature (°C): at 1,1 Un		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un.....		—
	- calculated temperature of fixing point/exposed part (°C)		—
	Ball-pressure test..... :	See Table 21.16 (13.2.1)	N/A
21.13 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N/A
	- case of abnormal conditions		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
21.13 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link	Yes ☐ No ☐	—
	- manual reset cut-out	Yes ☐ No ☐	—
	- auto reset cut-out	Yes ☐ No ☐	—
	- case of abnormal conditions		—

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- highest measured temperature of fixing point/ exposed part (°C):		—
	Ball-pressure test:.....	See Table 21.16 (13.2.1)	N/A
21.13.2 (-)	Test voltage		N/A
	Provision of 12.3.1 d) of part 1 and if class III rope lights 1,1 x rated voltage of transformer/convertor		—
	Provision of 12.4.1 d) of part 1 and if class III rope lights 1,06 x rated voltage of transformer/convertor		—
21.13.3 (-)	Short-circuit test of rectifier		P
	No emission of flames or molten material or production of flammable gases and no live parts accessible when short-circuit output of the rectifier		P

21.14 (9)	RESISTANCE TO DUST, SOLID OBJECTS AND MOISTURE		P
21.14 (-)	If IP > IP 20 the order of tests as specified in clause 21.13		—
21.14 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP	IP 20	—
	- mounting position during test		—
	- fixing screws tightened; torque (Nm).....		—
	- tests according to clauses		—
	- electric strength test afterwards		P
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		N/A
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		N/A
	d) i) For luminaires without drain holes – no water entry		N/A
	d) ii) For luminaires with drain holes – no hazardous water entry		N/A
	e) no water in watertight luminaire		N/A
	f) no contact with live parts (IP 2X)		N/A
	f) no entry into enclosure (IP 3X and IP 4X)		N/A
	f) no contact with live parts (IP3X and IP4X)		N/A
	g) no trace of water on part of lamp requiring protection from splashing water		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	h) no damage of protective shield or glass envelope		N/A
21.14 (9.3)	Humidity test 48 h	25°C, 93% R.H	P

21.15 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
21.15 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø		—
	Insulation resistance (MΩ)		—
	SELV		P
	- between current-carrying parts of different polarity :	100 MΩ	P
	- between current-carrying parts and mounting surface	100 MΩ	P
	- between current-carrying parts and metal parts of the luminaire	100 MΩ	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV		P
	- between live parts of different polarity.....	100 MΩ	P
	- between live parts and mounting surface	100 MΩ	P
	- between live parts and metal parts	100 MΩ	P
	- between live part and body of lighting chains.....		N/A
	- between live parts of different polarity through action of a switch		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
21.15 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Test voltage (V)		N/A
	SELV		P
	- between current-carrying parts of different polarity :	500 V	P
	- between current-carrying parts and mounting surface	500 V	P
	- between current-carrying parts and metal parts of the luminaire	500 V	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV		P
	- between live parts of different polarity.....	1480 V	P
	- between live parts and mounting surface	2960 V	P
	- between live parts and metal parts	2960 V	P
	- between live part and body of lighting chains.....		N/A
	- between live parts of different polarity through action of a switch		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
21.15 (10.3)	Touch current or protective conductor current (mA) :	Touch current:0.01mA	P

21.16 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
21.16 (13.2.1)	Ball-pressure test.....	See Test Table 21.16 (13.2.1)	P
21.16 (13.3.1)	Needle-flame test (10 s)	See Test Table 21.16 (13.3.1)	P
21.16 (13.3.2)	Glow-wire test (650°C)	See Test Table 21.16 (13.3.2)	P
21.16 (13.4)	Proof tracking test (IEC 60112)	See Test Table 21.16 (13.4)	N/A
20.16 (-)	Flexible pipes of rope lights in compliance with IEC 60811-508		P

IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
21.8 (11.2)	TABLES: Creepage distances and clearances					P
Table 11.1	Minimum distances (mm) for a.c. (50/60 Hz) sinusoidal voltages					P
RMS working voltage (V) not exceeding	50	150	250	500	750	1000
Creepage distances						
Required basic insulation, PTI ≥ 600	0,6	0,8	1,5	3	4	5,5
Measured:						
Required basic insulation, PTI < 600	1,2	1,6	2,5	5	8	10
Measured: Current-carrying parts of different polarity						
Required supplementary insulation PTI ≥ 600	-	0,8	1,5	3	4	5,5
Measured						
Required supplementary insulation PTI < 600	-	1,6	2,5	5	8	10
Measured						
Required reinforced insulation	-	3,2	5	6	8	11
Measured: Current-carrying parts and accessible parts						
Clearances						
Required basic insulation	0,2	0,8	1,5	3	4	5,5
Measured: Current-carrying parts of different polarity						
Required supplementary insulation	-	0,8	1,5	3	4	5,5
Measured						
Required reinforced insulation	-	1,6	3	6	8	11
Measured: Current-carrying parts and accessible parts						

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

Table 11.2	Minimum distances (mm) for non-sinusoidal pulse voltages						N/A
Rated pulse voltage (peak kV)	2,0	2,5	3,0	4,0	5,0	6,0	8,0
Required clearances	1,0	1,5	2	3	4	5,5	8
Measured							
Rated pulse voltage (peak kV)	10	12	15	20	25	30	40
Required clearances	11	14	18	25	33	40	60
Measured							
Rated pulse voltage (peak kV)	50	60	80	100	-	-	-
Required clearances	75	90	130	170	-	-	-
Measured							

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

21.16 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics			P
Allowed impression diameter (mm)		≤2.0		—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Cover of rectifier	--	75	0.99	
PCB of rectifier	--	125	1.14	
Plastic for fixed plug pin (translucent)	--	125	1.7	
Cover of plug	--	75	0.92	
Supplementary information: /				

21.16 (13.3.1)	TABLE: Needle-flame test (IEC 60695-11-5)				P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
PCB of rectifier	--	10s	No	0s	pass
Plastic for fixed plug pin (translucent)	--	10s	No	0s	pass
Potting glue	--	10s	No	0s	pass
Insulating translucent pipe	--	10s	No	0s	pass
--	--	--	--	--	--
Supplementary information: /					

21.16 (13.3.2)	TABLE: Glow-wire test (IEC 60695-2-11)			P
Glow wire temperature		650°C		—
Object/ Part No./ Material	Manufacturer/ trademark	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Cover of plug	--	No	0s	pass
Cover of rectifier	--	No	0s	pass
--	--	--	--	--

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
Any flame or glowing of the sample extinguished within 30 s of withdrawing the glow-wire, and any burning or molten drop did not ignite the underlying parts (Yes/No)			Yes
Supplementary information: /			

21.16 (13.4)	TABLE: Proof tracking test (IEC 60112)				P
Test voltage PTI		175 V			—
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
Cover of rectifier	--	overcurrent relay no operating no burns	overcurrent relay no operating no burns	overcurrent relay no operating no burns	pass
Insulating translucent pipe	--	overcurrent relay no operating no burns	overcurrent relay no operating no burns	overcurrent relay no operating no burns	pass
Plastic for fixed plug pin (translucent & black)	--	overcurrent relay no operating no burns	overcurrent relay no operating no burns	overcurrent relay no operating no burns	pass
Supplementary information: /					

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX A	Requirements for interconnecting connectors for use in rope lights		N/A
	This Annex A consist relevant requirements and modifications of IEC 61984		N/A
5.2	Classification according to protection against electric shock		N/A
	Only enclosed connectors		N/A
5.3	Classification according to the style of connector		N/A
	Only free connectors		N/A
5.4	Classification according to additional characteristics of connectors		N/A
	According b), d), e), f), h), and j)		N/A
6.2.1	Identification		N/A
	According a) and b)		N/A
6.4.1	Non accessibility of live parts		N/A
	Test with test finger on class II rope lights		N/A
6.9.1	Polarisation		N/A
	Improper connection of mating parts is prevented		N/A
	No unsafe compatibility between connectors for class II and class III rope lights of the same manufacturer		N/A
	Male part of class III rope lights not make contact in the female contact of low voltage connectors (e.g. IEC 60320)		N/A
	Manufacturer designed connectors, no unsafe compatibility with systems according IEC 60320 and IEC 60906 and national domestic plug and socket-outlet systems in the country where the rope light is placed on the market		N/A
6.9.3	Connection of conductors		N/A
	Cross sectional area of the contact making part of the interconnecting coupler not less than the corresponding conductor in the interconnected cable		N/A
6.10	Design of a CBC		N/A
	Adequate breaking capacity		N/A
	Female part at the end of the rope light, other than ordinary, provided with sealing device securely fixed to the coupler		N/A
6.13	Dielectric strength		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Test according clause 21.15 of this standard		N/A
6.14.2	Electrical endurance (CBC)		N/A
	Meet the specified breaking capacity		N/A
	Number of cycles 50		—
	Test according 7.3.5		N/A
6.14.3	Bendings (non-rewirable connectors)		N/A
	Meet the specified number of bendings		N/A
	Number of cycles 1000		—
	Test according 7.3.10		N/A
6.17	Cable clamp		N/A
	Test according clause 21.11.3 of this standard		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 1		TABLE: Critical components information					P
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹	
Plug	B	Shangyu Jintao Electron Co., Ltd.	JT001	250VAC; 2.5A	VDE 0620	VDE 400206 67	
Output cord	B	Foshan Shunde Haixian Hardware & Electric Appliance Co., Ltd.	H03VV-F	300V/300V, 2x0.75mm ²	EN 50525-2-11	VDE 400468 39	
End cover of lighting chains	C	Kingfa SCI & Tech Co., Ltd.	PVC-1018(f1)	125°C; V-0	--	UL E171666	
LED PCB	C	HUNAN FOUNDERSOON EST ELECTRONIC TECHNOLOGY CO LTD	FZD01	V-0, 105°C	--	UL E348119	
Enclosure of lighting chains	C	Kingfa SCI & Tech Co., Ltd.	PVC-1018(f1)	125°C; V-0	--	UL E171666	
Output cord of Rectifier bridge	B	Toong Yean Plastic Ind. Co., Ltd.	H05VV-F	300/300V, 2x0.75mm ²	DIN EN 50525-2-11	VDE 400243 56	
Connection of the supply cord and cord anchorage	C	Kingfa SCI & Tech Co., Ltd.	PVC-1018(f1)	125°C; V-0	--	UL E171666	
Control PCB	C	HUNAN FOUNDERSOON EST ELECTRONIC TECHNOLOGY CO LTD	FZD01	V-0, 105°C	--	UL E348119	

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.

The codes above have the following meaning:

- A - The component is replaceable with another one, also certified, with equivalent characteristics
- B - The component is replaceable if authorised by the test house
- C - Integrated component tested together with the appliance
- D - Alternative component

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	TABLE: Temperature measurements, thermal tests of Section 12			P			
	Type reference.....:	MAR-STRIP-100		—			
	Lamp used	LED module		—			
	Lamp control gear used	Rectifier bridge		—			
	Mounting position of luminaire	Normal mounting		—			
	Supply wattage (W)	6 W		—			
	Supply current (A)			—			
	Calculated power factor			—			
	Table: measured temperatures corrected for ta = 25 °C:						
	- abnormal operating mode			—			
	- test 1: rated voltage			—			
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage	1.06×240V		—			
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage			—			
	- test 4: 1,1 times rated voltage or 1,05 times rated wattage			—			
	Through wiring or looping-in wiring loaded by a current of A during the test			—			
Temperature measurements, (°C)							
Part	Ambient	Clause 12.4 – normal				Clause 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Plug	25	--	28.8	--	Ref	--	--
Supply cord	25	--	34.8	--	90	--	--
LED PCB	25	--	66.7	--	105	--	--
Enclosure of lighting chains	25	--	53.4	--	Ref	--	--
End cover of lighting chains	25	--	46.6	--	Ref	--	--
Connection of the supply cord and cord anchorage	25	--	48.7	--	Ref	--	--

IEC 60598-2-21							
Clause	Requirement + Test				Result - Remark		Verdict
Enclosure of control	25	--	58.2	--	75	--	--
Control PCB	25	--	88.2	--	130	--	--
Mounting surface	25	--	40.6	--	90	--	--
Supplementary information: /							

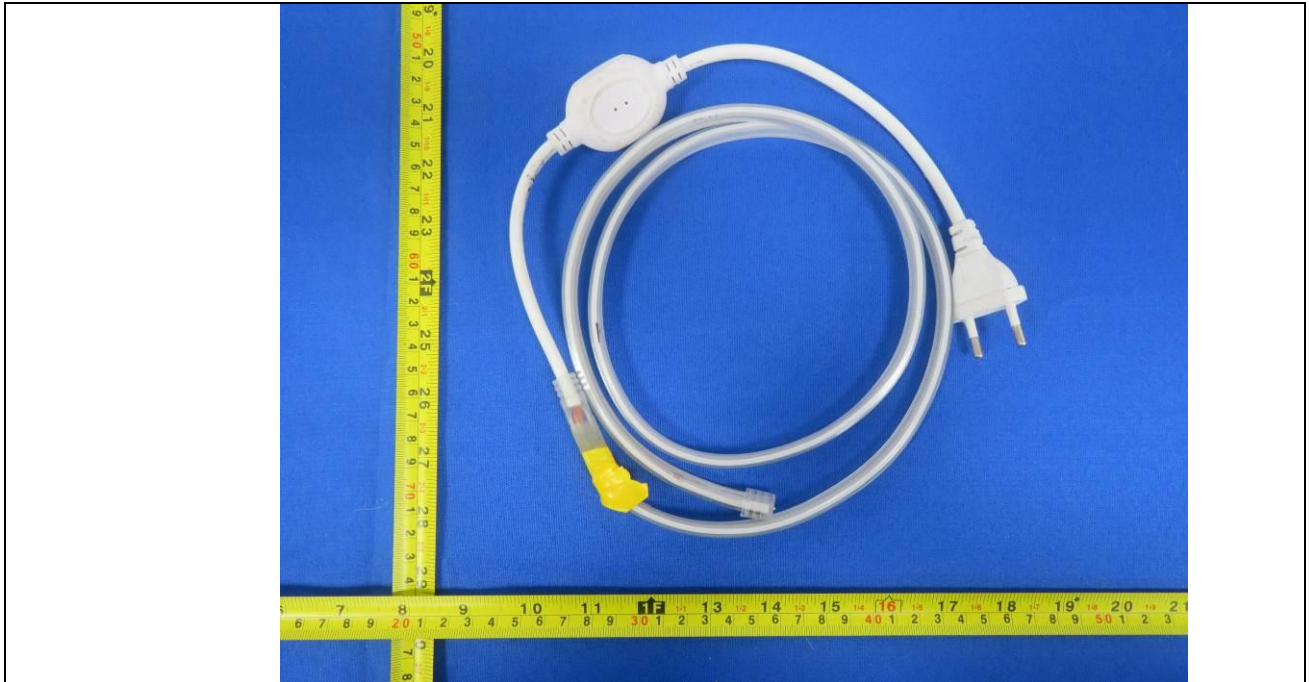
ANNEX 3	Screw terminals (part of the luminaire)					N/A	
(14)	SCREW TERMINALS					N/A	
(14.2)	Type of terminal					—	
	Rated current (A)					—	
(14.3.2.1)	One or more conductors					N/A	
(14.3.2.2)	Special preparation					N/A	
(14.3.2.3)	Terminal size					N/A	
	Cross-sectional area (mm ²)					—	
(14.3.3)	Conductor space (mm)					N/A	
(14.4)	Mechanical tests					N/A	
(14.4.1)	Minimum distance					N/A	
(14.4.2)	Cannot slip out					N/A	
(14.4.3)	Special preparation					N/A	
(14.4.4)	Nominal diameter of thread (metric ISO thread)	M				N/A	
	External wiring					N/A	
	No soft metal					N/A	
(14.4.5)	Corrosion					N/A	
(14.4.6)	Nominal diameter of thread (mm)					N/A	
	Torque (Nm)					N/A	
(14.4.7)	Between metal surfaces					N/A	
	Lug terminal					N/A	
	Mantle terminal					N/A	
	Pull test; pull (N)					N/A	
(14.4.8)	Without undue damage					N/A	

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
ANNEX 4	Screwless terminals (part of the luminaire)		N/A
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal.....:		—
	Rated current (A)		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5)	Terminals and connections for internal wiring		N/A
(15.5.1)	Mechanical tests		N/A
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples).....:		N/A
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples).....:		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples)		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
(15.6)	Terminals and connections for external wiring		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A
15.6.2	Mechanical tests		N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)		N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N)		N/A
(15.6.3)	Electrical tests		N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1		N/A

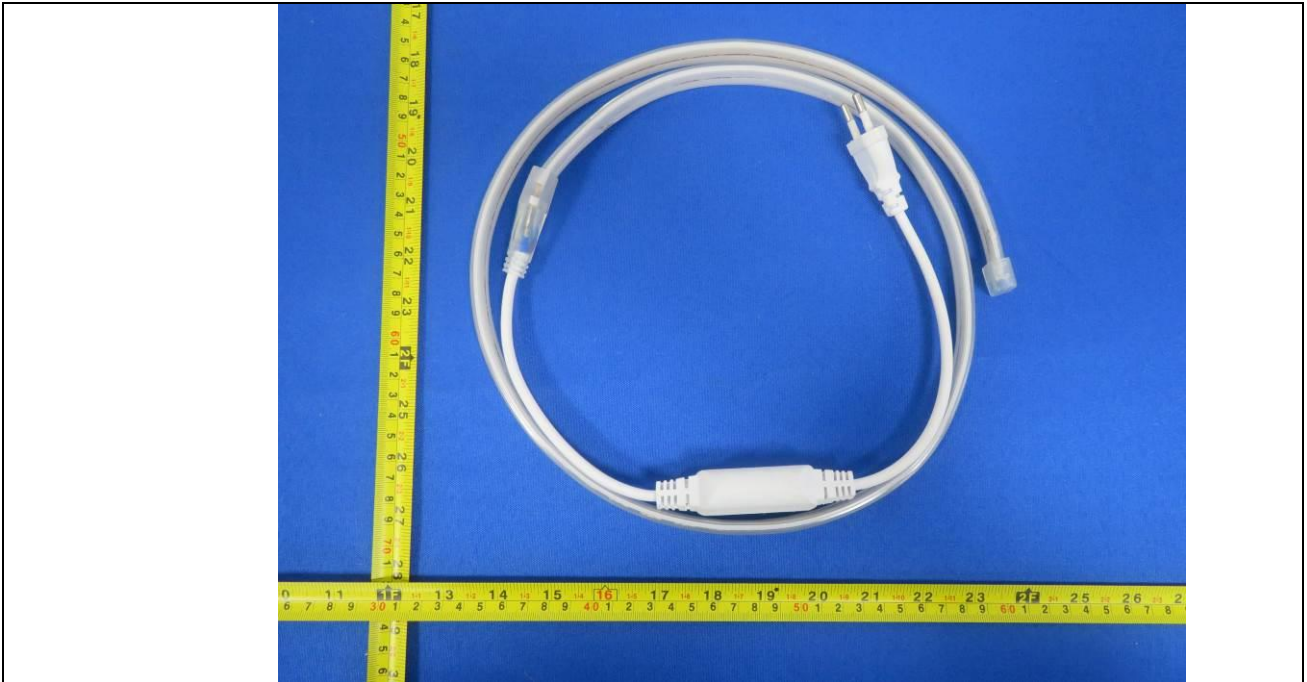
(15.6.3.1) (15.6.3.2)	TABLE: Contact resistance test / Heating tests										N/A
	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop of two inseparable joints										
	Voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV) :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV) :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV) :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 50th alt. 100th cycle										

IEC 60598-2-21										
Clause	Requirement + Test					Result - Remark				Verdict
	Max. allowed voltage drop (mV) :									—
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
Supplementary information:										

Attachment No.1**Product Photos**Details of: Fig. 1Details of: Fig. 2

Attachment No.1**Product Photos**

Details of: Fig. 3



Details of: Fig. 4

**- End of test report -**