



<b>TEST REPORT</b> <b>COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012</b> <b>COMMISSION DELEGATED REGULATION (EU) No 874/2012 of 26 September 2012</b> <b>Implementing Directive 2009/125/EC Of The European Parliament And Of The Council With</b> <b>Regard To Ecodesign Requirements For Directional Lamps, Light Emitting Diode</b> <b>Lamps And Related Equipment</b>	
<b>Report reference No.</b> .....	AOC250416017ER
<b>Tested by</b> .....	Bill Hu <i>Bill Hu</i>
<b>Approved by</b> .....	Robin Liu <i>Robin Liu</i>
<b>Date of issue</b> .....	2025-04-20
<b>Contents</b> .....	19 pages
<b>Testing laboratory</b>	
<b>Name</b> .....	Shenzhen AOCE Electronic Technology Service Co., Ltd
<b>Address</b> .....	Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
<b>Testing location</b> .....	As above
<b>Client</b>	
<b>Name</b> .....	ZHONGSHAN CN QUALITY LIGHTING COMPANY
<b>Address</b> .....	NO.4045, LIHE DENGBO CENTER, TONGING RD., GUZHEN, ZHONGSHAN, GUANGDONG, CHINA
<b>Manufacturer</b>	
<b>Name</b> .....	ZHONGSHAN CN QUALITY LIGHTING COMPANY
<b>Address</b> .....	NO.4045, LIHE DENGBO CENTER, TONGING RD., GUZHEN, ZHONGSHAN, GUANGDONG, CHINA
<b>Test specification</b>	
<b>Standard</b> .....	COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012; COMMISSION DELEGATED REGULATION (EU) No 874/2012 of 26 September 2012
<b>Test procedure</b> .....	COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012; COMMISSION DELEGATED REGULATION (EU) No 874/2012 of 26 September 2012
<b>Non-standard test method</b> .....	N/A
<b>Test item Description</b> .....	
<b>LED SPOT LIGHT</b>	
<b>Trademark</b> .....	N/A
<b>Model and/or type reference</b> .....	DD2068 25W 4000K
<b>Rating(s)(V/Hz)</b> .....	AC 220V, 50/60Hz, 25W
<b>Test Report Form No.</b> .....	TRF No. 1194/2012
<b>Test Report Form(s) Originator</b> .....	AOCE
<b>Master TRF</b> .....	2019-11-30

<b>Test case verdicts</b>	
Test case does not apply to the test object : N(N/A)	
Test item does meet the requirement .....: P(Pass)	
Test item does not meet the requirement ...: F(Fail)	
<b>Testing</b>	
Date of receipt of test item .....: 2024-07-25	
Date(s) of performance of test.....: 2024-07-25 to 2025-04-18	
<b>Test item particulars:</b>	
<b>Lamp type:</b>	
- Non directional LED lamp	No
- Directional LED lamp	Yes
- LED lamp replacing fluorescent lamp without integrated ballast	No
<b>Control gear:</b>	
- Integrated	Yes
- External	No
<b>Use of lamp:</b>	
- Indoor	Yes
- Outdoor	No
- Industry	No
<b>Envelope transparency:</b>	
- Clear lamp	Yes
- Non-clear lamp	No
<b>Dimmable lamp:</b>	No
<b>Lamps with anti-glare shield:</b>	No
<b>Lamp cap installed:</b>	N/A
<b>Declared data:</b>	
Rated voltage .....(V):	AC 220V
Rated lamp power .....(W):	25 W
Rated useful luminous flux.....(lm):	3000 lm
Rated Ra.....:	80
Rated beam angel ..... (°):	45°
Rated CCT .....(K):	4000 K
Rated life time .....(h):	50000 h

**Summary of testing:**

The product meets the efficiency requirement of stage 1 to stage 3 of directional lamps according to the implementation measure No. EU 1194/2012.

The product meets the functionality requirements of stage 3 according to the implementation measure No. EU 1194/2012.

**Remark:**

Lamp survival factor at 6000 h and lumen maintenance at 6000 h will be applicable from 1 March 2014.

Efficiency & Information requirement:

<b>Non-directional</b>	Stage 1	Stage 2	Stage 3	Stage 4	Stage 5	Stage 6
Start Date	1.Sep.2009	1.Sep.2009	1.Sep.2011	1.Sep.2012	1.Sep.2013	1.Sep.2016

<b>directional</b>	Stage 1	Stage 2	Stage 3
Start Date	1.Sep.2013	1.Sep.2014	1.Sep.2016

Functionality requirement:

<b>All</b>	Stage 1	Stage 1a	Stage 2	Stage 3
Start Date	1.Sep.2013	1.Mar.2014	1.Sep.2014	1.Sep.2016

**General remarks**

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(see Enclosure #)" refers to additional information appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a comma (point) is used as the decimal separator.

The sample(s) tested complies with the requirements of COMMISSION REGULATION (EC) No 1194/2012.

These tests fulfil the requirements of standard ISO/IEC 17025.

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Measurements of power of 0,50 W or greater was made with an uncertainty of less than or equal to 2 % at the 95 % confidence level.

Measurements of power of less than 0,50 W was made with an uncertainty of less than or equal to 0,01 W at the 95 % confidence level.

<b>COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012</b>			
Clause	Requirement - Test	Result - Remark	Verdict
<b>0</b>	<b>Measurement methods</b>		<b>P</b>
	Recognised state of art measurement methods incl. the one published in the Official Journal taking into account the measurement methods of (EC) 244/2009, (EU) 1194/2012		P
1.	Sample		P
	Number of sample used for test .....		P
2.	Number of sample used for test .....	20 PCS	P
<b>2.1</b>	<b>Non-directional LED lamp</b>		<b>N</b>
a	Non-directional LED lamp		N
	Evaluation : $P \leq P_{max}$		N
b	Limit definition:		N
	Clear lamps - Stage 1~5: $P_{max} = 0,8 * (0,88\sqrt{\Phi+0,049\Phi})$		N
	Clear lamps - Stage 6: $P_{max} = 0,6 * (0,88\sqrt{\Phi+0,049\Phi})$		N
	Non-clear lamps - Stage 1~6: $P_{max} = 0,24\sqrt{\Phi+0,0103\Phi}$		N
c	Exceptions:		N
	Clear lamps $60 \text{ lm} \leq \Phi \leq 950 \text{ lm}$ in Stage 1 $P_{max} = 1,1 * (0,88\sqrt{\Phi+0,049\Phi})$		N
	Clear lamps $60 \text{ lm} \leq \Phi \leq 725 \text{ lm}$ in Stage 2 $P_{max} = 1,1 * (0,88\sqrt{\Phi+0,049\Phi})$		N
	Clear lamps $60 \text{ lm} \leq \Phi \leq 450 \text{ lm}$ in Stage 3 $P_{max} = 1,1 * (0,88\sqrt{\Phi+0,049\Phi})$		N
	Clear lamps with G9 or R7s cap in Stage 6 $P_{max} = 0,8 * (0,88\sqrt{\Phi+0,049\Phi})$		N
	Correction factors, which are cumulative where appropriate and also applicable to the products covered by the Exceptions:		N
	non-clear lamp with colour rendering index $\geq 90$ and $P \leq 0,5 * (0,88\sqrt{\Phi+0,049\Phi})$	$P_{max}/0,85$	N
	non-clear lamp with second envelope and $P \leq 0,5 * (0,88\sqrt{\Phi+0,049\Phi})$	$P_{max}/0,95$	N
	LED lamp requiring external power supply	$P_{max}/1,1$	N

<b>2.2</b>	<b>Directional LED lamp</b>		<b>P</b>
a.	The maximum EEI (Annex III, cl.1.1 of EU 1194/2012):		P
	The energy efficiency index is calculated as follows and rounded to 2 decimal places: $EEI = P_{cor} / P_{ref}$		P
	For models with $\Phi_{use} \geq 1\,300$ lumen: $P_{ref}=0,07341\Phi_{use}$		P
	Stage 1~2: $EEI \max \leq 0.5$		P
	Stage 3: $EEI \max \leq 0.2$		P
b	Correction factors, which are cumulative where appropriate		P

<b>COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012</b>			
Clause	Requirement - Test	Result - Remark	Verdict
	No correction appropriate : $P_{cor} = P_{rated}$ lamps)	Prated: Pcor:	P
	Lamps operating on external LED lamp control gear : $P_{cor} = P_{rated} \times 1,10$	Prated: Pcor:	N
	Lamps with anti-glare shield: $P_{cor} = P_{rated} \times 0,80$	Prated: Pcor:	N
c	Pref is the reference power obtained from the useful luminous flux of the lamp ( $\Phi_{use}$ ) by the following formula:		P
	For models with $\Phi_{use} < 1\,300$ lumen: $P_{ref} = 0,88\sqrt{\Phi_{use}} + 0,049\Phi_{use}$	$\Phi_{use}$ : Pref:	N
	For models with $\Phi_{use} \geq 1\,300$ lumen: $P_{ref} = 0,07341 \Phi_{use}$	$\Phi_{use}$ : Pref:	P
2.3	Energy efficiency requirements for lamp control gear(LED driver test with appliance)		P
	Stage 1~2: No-load power $\leq 1.0W$		P
	Stage 3: No-load power $\leq 0.5W$		P

<b>3</b>	<b>Lamp functionality requirements for non-directional and directional LED lamp (Annex III, cl.2.2, table 5 of EU 1194/2012)</b>		<b>P</b>
3.1	Lamp survival factor (LSF) at 6000h		P
	From March 1, 2014: $LSF \geq 0.90$	See the table 5	P
3.2	Lumen maintenance (LLMF) at 6000h		P
	From March 1, 2014: $LLMF \geq 0.80$	See the table 5	P
3.3	Number of switching cycles (n) before failure		P
	$n \geq 15\,000$ if rated lamp life $\geq 30\,000$ h	See the table 5	P
	otherwise: $n \geq$ half the rated lamp life expressed in hours		N
3.4	Starting time ( $t_{Start}$ )		P
	$t_{Start} < 0.5$ s	See the table 5	P
3.5	Lamp warm-up time ( $t_{Warm}$ ) to 95 % $\Phi$		P
	$t_{Warm} < 2$ s	See the table 5	P
3.6	Premature failure rate (PFR)		P
	$PFR \leq 5,0$ % at 1000 h	See the table 5	P
3.7	Colour rendering ( $R_a$ )		P
	$R_a \geq 80$	See the table 5	P
	$R_a \geq 65$ if the lamp is intended for outdoor or industrial applications		N
3.8	Colour consistency		P
	Variation of chromaticity coordinates within a sixstep MacAdam ellipse or less.	See the table 5	P
3.9	Lamp power factor (PF)		P
	$P \leq 2$ W: no requirement		N

<b>COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012</b>			
Clause	Requirement - Test	Result - Remark	Verdict
	2 W < P ≤ 5 W: PF > 0,4 5 W < P ≤ 25 W: PF > 0,5	See the table 5	P
	P > 25 W: PF > 0,9		N
3.10	Compatibility requirement for lamps using lamp caps also used with filament lamps		N
	Lamps shall comply from <b>stage 2</b> with state of art requirements for compatibility with equipment designed for installation between the mains and filament lamps (e.g. dimmer, ...)		N

<b>4</b>	<b>Product Information Requirements</b>		<b>P</b>
<b>4.1</b>	<b>Product information requirements for directional lamps (Annex III, cl.3.1 of EU 1194/2012)</b>		<b>P</b>
	The following information shall be provided as from stage 1, except where otherwise stipulated.		P
	In all forms of product information, the term 'energy-saving lamp' or any similar product related promotional statement about lamp efficacy may be used only if the energy efficiency index of the lamp (calculated in accordance with	LED modules marketed as part of a luminaire from which they are not intended to be removed by the end-user.	N
	the method set out in point 1.1 of this Annex) is 0,40 or below.		N
4.1.1	Information to be displayed on the lamp itself		P
	For lamps other than high-intensity discharge lamps, the value and unit ('lm', 'K' and '°') of the nominal useful luminous flux, of the colour temperature and of the nominal beam angle shall be displayed in a legible font on the surface of the lamp if, after the inclusion of safety-related information such as power and voltage, there is sufficient space available for it on the lamp without unduly obstructing the light coming from the lamp.		P
	If there is room for only one of the three values, the nominal useful luminous flux shall be provided. If there is room for two values, the nominal useful luminous flux and the colour temperature shall be provided.		N
4.1.2	Information to be visibly displayed to end-users, prior to their purchase, on the packaging and on free access websites		P
	The information below shall be displayed on free access websites and in any other form the manufacturer deems appropriate.		P
	If the product is placed on the market in a packaging containing information to be visibly displayed to the end- users, prior to their purchase, the information shall also be clearly and prominently indicated on the packaging.		P

<b>COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012</b>			
Clause	Requirement - Test	Result - Remark	Verdict
	The information does not need to use the exact wording on the list below. It may be displayed in the form of graphs, drawings or symbols rather than text.		P
(a)	The information does not need to use the exact wording on the list below. It may be displayed in the form of graphs, drawings or symbols rather than text.		P
(b)	Nominal life time of the lamp in hours (not longer than the rated life time);		P
(c)	Colour temperature, as a value in Kelvins and also expressed graphically or in words;		P
(d)	Number of switching cycles before premature failure;		P
(e)	Warm-up time up to 60 % of the full light output (may be indicated as 'instant full light' if less than 1 second);		N
(f)	A warning if the lamp cannot be dimmed or can be dimmed only on specific dimmers; in the latter case a list of compatible dimmers shall be also provided on the manufacturer's website;		N
(g)	If designed for optimum use in non-standard conditions (such as ambient temperature $T_a \neq 25^\circ\text{C}$ or specific thermal management is necessary), information on those conditions;		N
(h)	Lamp dimensions in millimetres (length and largest diameter);		P
(i)	Nominal beam angle in degrees;		P
(j)	If the lamp's beam angle is $\geq 90^\circ$ and its useful luminous flux as defined in point 1.1 of this Annex is to be measured in a $120^\circ$ cone, a warning that the lamp is not suitable for accent lighting;		N
(k)	If the lamp cap is a standardised type also used with filament lamps, but the lamp's dimensions are different from the dimensions of the filament lamp(s) that the lamp is meant to replace, a drawing comparing the lamp's dimensions to the dimensions of the filament lamp(s) it replaces;		N
(l)	An indication that the lamp is of a type listed in the first column of Table 6 may be displayed only if the luminous flux of the lamp in a $90^\circ$ cone ( $\Phi 90^\circ$ ) is not lower than the reference luminous flux indicated in Table 6 for the smallest wattage among the lamps of the type concerned. The reference luminous flux shall be multiplied by the correction factor in Table 7. For LED lamps, it shall be in addition multiplied by the correction factor in Table 8;	Claimed equivalent: Reference $\Phi 90^\circ$ (lm): (incl. correction factor)	N

**COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012**

Clause	Requirement - Test	Result - Remark	Verdict
(m)	An equivalence claim involving the power of a replaced lamp type may be displayed only if the lamp type is listed in Table 6 and if the luminous flux of the lamp in a 90° cone ( $\Phi_{90^\circ}$ ) is not lower than the corresponding reference luminous flux in Table 6. The reference luminous flux shall be multiplied by the correction factor in Table 7. For LED lamps, it shall be in addition multiplied by the correction factor in Table 8. The intermediate values of both the luminous flux and the claimed equivalent lamp power (rounded to the nearest 1 W) shall be calculated by linear interpolation between the two adjacent values.	Claimed equivalent: Claimed P: Reference $\Phi_{90^\circ}$ (lm): (incl. correction factor)	N

Table 6

**Reference luminous flux for equivalence claims**

Extra-low voltage reflector type		
Type	Power (W)	Reference $\Phi_{90^\circ}$ (lm)
MR11 GU4	20	160
	35	300
MR16 GU 5.3	20	180
	35	300
	50	540
AR111	35	250
	50	390
	75	640
	100	785
Mains-voltage blown glass reflector type		
Type	Power (W)	Reference $\Phi_{90^\circ}$ (lm)
R50/NR50	25	90
	40	170
R63/NR63	40	180
	60	300
R80/NR80	60	300
	75	350
	100	580
R95/NR95	75	350
	100	540
R125	100	580
	150	1 000



**COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012**

Clause	Requirement - Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Mains-voltage pressed glass reflector type

Type	Power (W)	Reference $\Phi_{90^\circ}$ (lm)
PAR16	20	90
	25	125
	35	200
	50	300
PAR20	35	200
	50	300
	75	500
PAR25	50	350
	75	550
PAR30S	50	350
	75	550
	100	750
PAR36	50	350
	75	550
	100	720
PAR38	60	400
	75	555
	80	600
	100	760
	120	900

Table 7

Multiplication factors for lumen maintenance

Lamp type	Luminous flux multiplication factor
Halogen lamps	1
Compact fluorescent lamps	1,08
LED lamps	$1 + 0,5 \times (1 - LLMF)$ where LLMF is the lumen maintenance factor at the end of the nominal life

Table 8

Multiplication factors for LED lamps

LED lamp beam angle	Luminous flux multiplication factor
$20^\circ \leq \text{beam angle}$	1
$15^\circ \leq \text{beam angle} < 20^\circ$	0,9
$10^\circ \leq \text{beam angle} < 15^\circ$	0,85
$\text{beam angle} < 10^\circ$	0,80

<b>COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012</b>			
Clause	Requirement - Test	Result - Remark	Verdict
4.1.3	Information to be made publicly available on free-access websites and in any other form the manufacturer deems appropriate		N
(a)	The information specified in above point 4.1.2;		N
(b)	Rated power (0,1 W precision)		N
(c)	Rated useful luminous flux		N
(d)	Rated lamp life time		N
(e)	Lamp power factor		N
(f)	Lumen maintenance factor at the end of the nominal life (except for filament lamps)		N
(g)	Starting time (as X,X seconds)		N
(h)	Colour rendering		N
(i)	Colour consistency (only for LEDs)		N
(j)	Rated peak intensity in candela (cd)		N
(k)	Rated beam angle		N
(l)	If intended for use in outdoor or industrial If intended for use in outdoor or industrial		N
(m)	Spectral power distribution in the range 180-800 nm		N
<b>4.2</b>	<b>Product information requirements for non-directional lamps (Annex II, cl.3 of EC 244/2009)</b>		<b>N</b>
	Information to be visibly displayed prior to purchase to end-users on the packaging and on free access websites. (It may be displayed using graphs, figures or symbols rather than text.)		N
(a)	When the nominal lamp power is displayed outside the energy label in accordance with Directive 98/11/EC, the nominal luminous flux of the lamp shall also be separately displayed in a font at least twice as large as the nominal lamp power display outside the label		N
(b)	Nominal life time of the lamp in hours (not higher than the rated life time)		N
(c)	Nominal life time of the lamp in hours (not higher than the rated life time)		N
(d)	Colour temperature (also expressed as a value in Kelvins);		N
(e)	Warm-up time up to 60 % of the full light output (may be indicated as 'instant full light' if less than 1 second);		N
(f)	A warning if the lamp cannot be dimmed or can be dimmed only on specific dimmers;		N
(g)	If designed for optimal use in non-standard conditions (such as ambient temperature $T_a \neq 25^\circ\text{C}$ ), information on those conditions;		N
(h)	Lamp dimensions in millimeters (length and diameter);		N

**COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012**

Clause	Requirement - Test	Result - Remark	Verdict
(i)	If equivalence with an incandescent lamp is claimed on the packaging, the claimed equivalent incandescent lamp power (rounded to 1 W) shall be that corresponding in Table 6 to the luminous flux of the lamp contained in the packaging. The intermediate values of both the luminous flux and the claimed incandescent lamp power (rounded to 1W) shall be calculated by linear interpolation between the two adjacent values.		N

*Table 6*

Rated lamp luminous flux $\Phi$ [lm]			Claimed equivalent incandescent lamp power
CFL	Halogen	LED and other lamps	[W]
125	119	136	15
229	217	249	25
432	410	470	40
741	702	806	60
970	920	1 055	75
1 398	1 326	1 521	100
2 253	2 137	2 452	150
3 172	3 009	3 452	200

(j)	The term ' <b>energy saving lamp</b> ' or any similar product related promotional statement about lamp efficacy may only be used if the lamp complies with the efficacy requirements applicable to non clear lamps in Stage 1 according to Tables 1, 2 and 3.		N
4.2.2	Information to be made publicly available on free-access websites. (information shall be expressed at least as values.)		P
(a)	The information specified in above point 4.2.1		P
(b)	Rated wattage (0,1 W precision);		P
(c)	Rated luminous flux;		P
(d)	Rated lamp life time;		P
(e)	Lamp power factor;		P
(f)	Lumen maintenance factor at the end of the nominal life;		P

<b>COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012</b>			
Clause	Requirement - Test	Result - Remark	Verdict
(g)	Starting time (as X,X seconds);		P
(h)	Colour rendering.		P
<b>4.3</b>	<b>Additional product information requirements for LED lamps replacing fluorescent lamps without integrated ballast (Annex III, cl.3.2 of EU 1194/2012)</b>		<b>N</b>
4.3.1	In addition to the product information requirements according to point 3.1 of this Annex or point 3.1 of Annex II to Regulation (EC) No 244/2009, as from stage 1, manufacturers of LED lamps replacing fluorescent lamps without integrated ballast shall publish a warning on publicly available free-access websites and in any other form they deem appropriate that the overall energy efficiency and light distribution of any installation that uses such lamps are determined by the design of the installation.		N
4.3.2	Claims that an LED lamp replaces a fluorescent lamp without integrated ballast of a particular wattage may be made only if:		N
	— the luminous intensity in any direction around the tube axis does not deviate by more than 25 % from the average luminous intensity around the tube, and		N
	— the luminous flux of the LED lamp is not lower than the luminous flux of the fluorescent lamp of the claimed wattage. The luminous flux of the fluorescent lamp shall be obtained by multiplying the claimed wattage with the minimum luminous efficacy value corresponding to the fluorescent lamp in Commission Regulation (EC) No 245/2009 and		N
	— the wattage of the LED lamp is not higher than the wattage of the fluorescent lamp it is claimed to replace.		N
	The technical documentation file shall provide the data to support such claims.		N

<b>Table 2</b>	<b>Maximum energy efficiency index (EEI)</b>				<b>P</b>
Type reference:	DD2068 25W 4000K				
Application date	Mains-voltage filament lamps	Other filament lamps	High-intensity discharge lamps	Other lamps	Measured Value
Stage 1	If $\Phi_{use} > 450$ lm: 1,75	If $\Phi_{use} \leq 450$ lm: 1.20 If $\Phi_{use} > 450$ lm: 0,95	0,50	0,50	N
Stage 2	1.75	0.95	0.50	0.50	N
Stage 3	0.95	0.95	0.36	0.20	P

<b>Table 3</b>	<b>Functionality requirements for directional compact fluorescent lamps</b>	<b>N</b>
----------------	---	----------

**COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012**

Clause	Requirement - Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Type reference:			
Functionality parameter	Stage 1 except where indicated otherwise	Stage 3	Measured Stage 1
Lamp survival factor at 6 000 h	From 1 March 2014: $\geq 0,50$	$\geq 0,70$	N
Lumen maintenance	At 2 000 h: $\geq 80 \%$	At 2 000 h: $\geq 83 \%$ At 6 000 h: $\geq 70 \%$	N
Number of switching cycles before failure	$\geq$ half the lamp lifetime expressed in hours $\geq 10\,000$ if lamp starting time $> 0,3$ s	$\geq$ lamp lifetime expressed in hours $\geq 30\,000$ if lamp starting time $> 0,3$ s	N
Starting time	$< 2,0$ s	$< 1,5$ s if $P < 10$ W $< 1,0$ s if $P \geq 10$ W	N
Lamp warm-up time to 60 % $\Phi$	$< 40$ s or $< 100$ s for lamps containing mercury in amalgam form	$< 40$ s or $< 100$ s for lamps containing mercury in amalgam form	N
Premature failure rate	$\leq 5,0 \%$ at 500 h	$\leq 5,0 \%$ at 1 000 h	N
Lamp power factor for lamps with integrated control gear	$\geq 0,50$ if $P < 25$ W $\geq 0,90$ if $P \geq 25$ W	$\geq 0,55$ if $P < 25$ W $\geq 0,90$ if $P \geq 25$ W	N
Colour rendering (Ra)	$\geq 80$ $\geq 65$ if the lamp is intended for outdoor or industrial applications according to point 3.1.3(l) of this Annex	$\geq 80$ $\geq 65$ if the lamp is intended for outdoor or industrial applications according to point 3.1.3(l) of this Annex	N

<b>Table 4</b>	<b>Functionality requirements for other directional lamps (excluding LED lamps, compact fluorescent lamps and high-intensity discharge lamps)</b>		<b>N</b>
Type reference:			
Functionality parameter	Stage 1 and 2	Stage 3	Measured Stage 1
Rated lamp lifetime at 50 % lamp survival	$\geq 1\,000$ h ( $\geq 2\,000$ h in stage 2) $\geq 2\,000$ h for extra low voltage lamps not complying with the stage 3 filament lamp efficiency requirement in point 1.1 of this Annex	$\geq 2\,000$ h $\geq 4\,000$ h for extra low voltage lamps	N
Lumen maintenance	$\geq 80 \%$ at 75 % of rated average lifetime	$\geq 80 \%$ at 75 % of rated average lifetime	N
Number of switching	$\geq$ four times the rated lamp life	$\geq$ four times the rated lamp life	N

<b>COMMISSION REGULATION (EU) No 1194/2012 of 12 December 2012</b>			
Clause	Requirement - Test	Result - Remark	Verdict
cycles	expressed in hours	expressed in hours	
Starting time	< 0,2 s	< 0,2 s	N
Lamp warm-up time to 60 % $\Phi$	$\leq 1,0$ s	$\leq 1,0$ s	N
Premature failure rate	$\leq 5,0$ % at 100 h	$\leq 5,0$ % at 200 h	N
Lamp power factor for lamps with integrated control gear	Power > 25 W: $\geq 0,9$ Power $\leq 25$ W: $\geq 0,5$	Power > 25 W: $\geq 0,9$ Power $\leq 25$ W: $\geq 0,5$	N

<b>Table 5</b>	<b>Functionality requirements for non-directional and directional LED lamps</b>		<b>P</b>
Type reference:	DD2068 25W 4000K		
Functionality parameter	Requirements		Measured Stage 3
Lamp survival factor at 6 000 h:	From 1 March 2014: $\geq 0,90$	1.0	P
Lumen Maintenance at 6 000 h:	From 1 March 2014: $\geq 0,80$	0.865	P
-Number of switching cycles before failure:	$\geq 15$ 000 if rated lamp life $\geq 30$ 000 h otherwise: $\geq$ half the rated lamp life expressed in hours	15000 times	P
- Starting time:	< 0.5 s	0.24s	P
- Lamp warm-up time to 95% $\Phi$ :	< 2 s	0.56s	P
- Premature failure rate:	$\leq 5,0\%$ at 1 000 h	--	P
-Colour rendering (Ra):	$\geq 80$ ; $\geq 65$ if the lamp is intended for outdoor or industrial applications in accordance with point 3.1.3(I) of this Annex	85.5	P
-Colour consistency:	Variation of chromaticity coordinates within a six-step MacAdam ellipse or less.	<6 SDCM	P
-Lamp power factor (PF) for lamps with integrated control gear:	$P \leq 2$ W: no requirement; $2$ W < $P \leq 5$ W: PF > 0,4; $5$ W < $P \leq 25$ W: PF > 0,5; $P > 25$ W: PF > 0,9	0.814	P

## Tables

Table13A. Energy class																	
Standard	Clause	Model No.	Verdict														
EU 874/2012 EU 1194/2012	Energy class A++	DD2068 25W 4000K	P														
Conditions	-Test procedure: Tungsten filament lamp-EN 60064; CFL-EN 60969 LED lamp- IEC/PAS 62612 Tungsten halogen lamp-EN 60357 -test conditions: -ambition: <u>25</u> °C/ <u>65</u> %R.H. -Test voltage: AC 220V, 50Hz																
Luminous Flux of the lamp	3060 lm																
P <sub>cor</sub> ((EU) No 874/2012 ANNEX VII)	P <sub>cor</sub> is the rated power (P rated ) for models without external control gear and the rated power (P rated ) corrected in accordance with Table 2 for models with external control gear. The rated power of the lamps is measured at their nominal input voltage.																
<div>Table 2</div> <div>Power correction if the model requires external control gear</div> <table><tr><th>Scope of the correction</th><th>Power corrected for control gear losses (P<sub>cor</sub>)</th></tr><tr><td>Lamps operating on external halogen lamp control gear</td><td>P<sub>rated</sub> × 1,06</td></tr><tr><td>Lamps operating on external LED lamp control gear</td><td>P<sub>rated</sub> × 1,10</td></tr><tr><td>Fluorescent lamps of 16 mm diameter (T5 lamps) and 4-pin single capped fluorescent lamps operating on external fluorescent lamp control gear</td><td>P<sub>rated</sub> × 1,10</td></tr><tr><td>Other lamps operating on external fluorescent lamp control gear</td><td><math>P_{rated} \times \frac{0,24\sqrt{\Phi_{use}} + 0,0103\Phi_{use}}{0,15\sqrt{\Phi_{use}} + 0,0097\Phi_{use}}</math></td></tr><tr><td>Lamps operating on external high-intensity discharge lamp control gear</td><td>P<sub>rated</sub> × 1,10</td></tr><tr><td>Lamps operating on external low pressure sodium lamp control gear</td><td>P<sub>rated</sub> × 1,15</td></tr></table>				Scope of the correction	Power corrected for control gear losses (P <sub>cor</sub> )	Lamps operating on external halogen lamp control gear	P <sub>rated</sub> × 1,06	Lamps operating on external LED lamp control gear	P <sub>rated</sub> × 1,10	Fluorescent lamps of 16 mm diameter (T5 lamps) and 4-pin single capped fluorescent lamps operating on external fluorescent lamp control gear	P <sub>rated</sub> × 1,10	Other lamps operating on external fluorescent lamp control gear	$P_{rated} \times \frac{0,24\sqrt{\Phi_{use}} + 0,0103\Phi_{use}}{0,15\sqrt{\Phi_{use}} + 0,0097\Phi_{use}}$	Lamps operating on external high-intensity discharge lamp control gear	P <sub>rated</sub> × 1,10	Lamps operating on external low pressure sodium lamp control gear	P <sub>rated</sub> × 1,15
Scope of the correction	Power corrected for control gear losses (P <sub>cor</sub> )																
Lamps operating on external halogen lamp control gear	P <sub>rated</sub> × 1,06																
Lamps operating on external LED lamp control gear	P <sub>rated</sub> × 1,10																
Fluorescent lamps of 16 mm diameter (T5 lamps) and 4-pin single capped fluorescent lamps operating on external fluorescent lamp control gear	P <sub>rated</sub> × 1,10																
Other lamps operating on external fluorescent lamp control gear	$P_{rated} \times \frac{0,24\sqrt{\Phi_{use}} + 0,0103\Phi_{use}}{0,15\sqrt{\Phi_{use}} + 0,0097\Phi_{use}}$																
Lamps operating on external high-intensity discharge lamp control gear	P <sub>rated</sub> × 1,10																
Lamps operating on external low pressure sodium lamp control gear	P <sub>rated</sub> × 1,15																
P <sub>ref</sub> ((EU) No 874/2012 ANNEX VII)	P <sub>ref</sub> is the reference power obtained from the useful luminous flux of the model (Φ use ) by the following formulae: For models with Φ use < 1 300 lumen: P ref = 0,88 √ Φ use + 0,049 Φ use For models with Φ use ≥ 1 300 lumen: P ref = 0,07341 Φ use																

## Tables

The useful luminous flux ( $\Phi_{use}$ ) is defined in accordance with Table 3.	Table 3 Definition of the useful luminous flux			
	Model		Useful luminous flux ( $\Phi_{use}$ )	
	Non-directional lamps		Total rated luminous flux ( $\Phi$ )	
	Directional lamps with a beam angle $\geq 90^\circ$ other than filament lamps and carrying a textual or graphical warning on their packaging that they are not suitable for accent lighting		Rated luminous flux in a $120^\circ$ cone ( $\Phi_{120^\circ}$ )	
	Other directional lamps		Rated luminous flux in a $90^\circ$ cone ( $\Phi_{90^\circ}$ )	
Technical requirements	Test result			
Pcor	25.3			
Pref	224.6			
EEI=Pcor/Pref	For non-direction lamp		For direction lamp	
EEI=0.113	A++	EEI $\leq$ 0.11	A++	EEI $\leq$ 0.13
	A+	0.11<EEI $\leq$ 0.17	A+	0.13<EEI $\leq$ 0.18
	A	0.17<EEI $\leq$ 0.24	A	0.18<EEI $\leq$ 0.40
	B	0.24<EEI $\leq$ 0.60	B	0.40<EEI $\leq$ 0.95
	C	0.60<EEI $\leq$ 0.80	C	0.95<EEI $\leq$ 1.20
	D	0.80<EEI $\leq$ 0.95	D	1.20<EEI $\leq$ 1.75
	E	0.95<EEI	E	1.75<EEI
Energy class	--		A++	



## Tables

**Test Result**

Sample No.	Starting time (s)	Lamp warm-up time to 95 % $\Phi$	Switching Cycle	Premature Failure Rate 1000h	Power (W)	Power Factor	Luminous Flux total (lm)	Efficacy (lm/W)	Color Temp (CCT)	Color rendering (Ra)	SDCM	Luminous flux (lm) After 6000h	Lumen Maintenance (%)	Lamp survival factor at 6000h
1	0.24	0.55	15000	0	25.4	0.803	3061	120.5	4046	85.1	3.9	2648	86.5%	100%
2	0.23	0.55	15000	0	25.3	0.798	3055	120.8	4032	85.0	4.5	2636	86.3%	100%
3	0.25	0.57	15000	0	25.2	0.821	3061	121.5	4052	85.7	3.9	2648	86.5%	100%
4	0.23	0.56	15000	0	25.5	0.818	3062	120.1	4016	85.3	4.6	2643	86.3%	100%
5	0.22	0.55	15000	0	25.4	0.820	3060	120.5	4004	85.1	4.0	2644	86.4%	100%
6	0.24	0.57	15000	0	25.4	0.812	3060	120.5	4057	85.6	3.8	2644	86.4%	100%
7	0.26	0.56	15000	0	25.2	0.809	3061	121.5	4043	86.1	4.2	2648	86.5%	100%
8	0.25	0.56	15000	0	25.4	0.814	3059	120.4	4040	86.0	3.9	2643	86.4%	100%
9	0.26	0.57	15000	0	25.3	0.811	3061	121.0	4039	85.8	4.5	2648	86.5%	100%
10	0.23	0.55	15000	0	25.2	0.820	3060	121.4	4015	85.2	4.2	2641	86.3%	100%
11	0.24	0.57	15000	0	25.2	0.818	3062	121.5	4018	85.7	4.6	2649	86.5%	100%
12	0.26	0.57	15000	0	25.3	0.816	3059	120.9	4031	85.9	4.2	2640	86.3%	100%
13	0.25	0.56	15000	0	25.4	0.809	3056	120.3	4039	85.7	4.5	2643	86.5%	100%
14	0.23	0.55	15000	0	25.4	0.814	3062	120.6	4032	85.4	4.5	2649	86.5%	100%
15	0.24	0.56	15000	0	25.2	0.810	3060	121.4	4051	85.2	4.4	2641	86.3%	100%
16	0.25	0.56	15000	0	25.3	0.819	3060	120.9	4012	85.1	4.0	2647	86.5%	100%
17	0.23	0.57	15000	0	25.4	0.818	3062	120.6	4018	85.5	4.1	2701	88.2%	100%
18	0.26	0.56	15000	0	25.4	0.815	3059	120.4	4032	85.7	4.4	2643	86.4%	100%
19	0.25	0.55	15000	0	25.3	0.817	3061	121.0	4023	85.6	4.3	2639	86.2%	100%
20	0.23	0.57	15000	0	25.4	0.812	3054	120.2	4041	86.0	4.5	2663	87.2%	100%
Avg.	0.24	0.56	15000	0	25.3	0.814	3060	120.8	4032	85.5	4.3	2648	86.5%	100%

*Pictures*

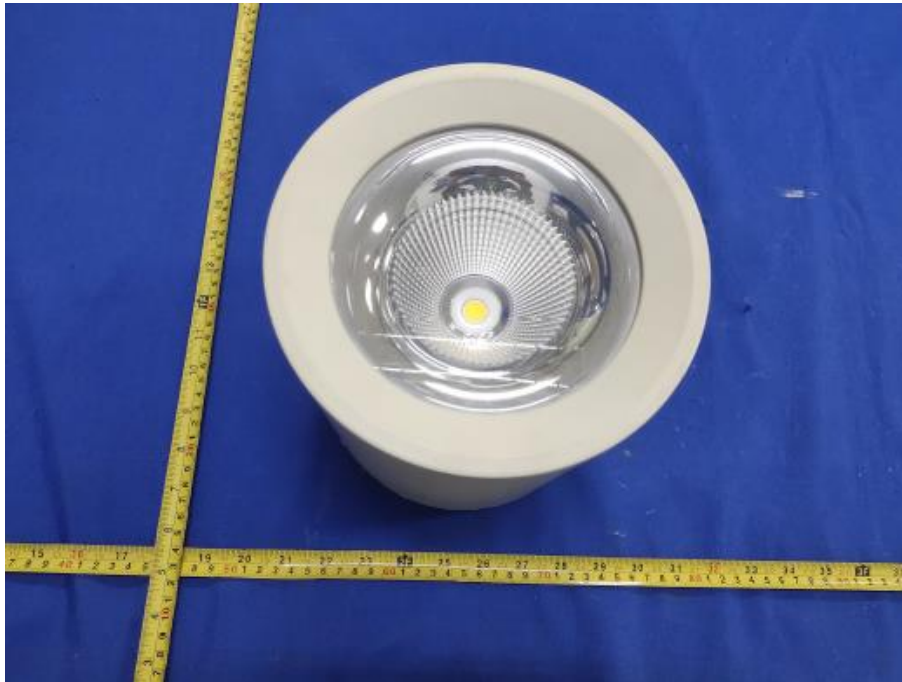


Fig.1



Fig.2

- End of report -