

EMC TEST REPORT
For

Dongguan Pinguan sports technology Co., LTD

Smart Li-Polymer Battery Pack

Model No.: PG-8500

Additional Model No.: N/A

Prepared for : Dongguan Pinguan sports technology Co., LTD
Address : Room 303, Building 3, No. 8, Shajingkeng Road,
Liaobu Town, Dongguan City, Guangdong Province

Prepared by : Shenzhen AOCE Electronic Technology Service Co.,
Ltd.
Address : Room 202, 2nd Floor, No.12th Building of Xinhe
Tongfuyu Industrial Park, Fuhai Street, Baoan District,
Shenzhen, Guangdong, China
Tel : (+86)755-85277785
Fax : (+86)755-23705230
Web : www.aoc-cert.com
Mail : postmaster@aoc-cert.com

Date of receipt of test sample : July 18, 2025
Number of tested samples : 1
Serial number : Prototype
Date of Test : July 18, 2025 ~ July 29, 2025
Date of Report : July 29, 2025



EMC TEST REPORT**EN IEC 55014-1:2021**

Requirements for household appliances, electric tools and similar apparatus -- Part 1: Emission

EN IEC 55014-2:2021Requirements for household appliances, electric tools and similar apparatus -- Part 2: Immunity -
Product family standard**Report Reference No.: AOC250729101E****Date Of Issue.....: July 29, 2025****Testing Laboratory Name.....: Shenzhen AOCE Electronic Technology Service Co., Ltd.****Address.....: Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu
Industrial Park, Fuhai Street, Baoan District, Shenzhen,
Guangdong, China****Testing Location/ Procedure.....: Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐****Applicant's Name.....: Dongguan Pinguan sports technology Co., LTD****Address.....: Room 303, Building 3, No. 8, Shajingpeng Road, Liaobu Town,
Dongguan City, Guangdong Province****Test Specification:****Standard.....: EN IEC 55014-1:2021
EN IEC 55014-2:2021****Test Report Form No.....: AOCEMC-1.0****TRF Originator.....: Shenzhen AOCE Electronic Technology Service Co., Ltd.****Master TRF.....: Dated 2011-03****Shenzhen AOCE Electronic Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen AOCE Electronic Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen AOCE Electronic Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description.....: Smart Li-Polymer Battery Pack**Trade Mark.....: N/A****Model/ Type Reference.....: PG-8500****Ratings.....: 5V, 2A, 10W, Batttery 3.85V 8500mAh****Result: Positive****Compiled by:**

David Liu/ File administrators

Supervised by:

Kevin Huang/ Technique principal

Approved by:

Jackson Fang/ Manager

EMC -- TEST REPORT**Test Report No. : AOC250729101E**July 29, 2025

Date of issue

Type / Model..... : PG-8500

EUT..... : Smart Li-Polymer Battery Pack

Applicant..... : Dongguan Pinguan sports technology Co., LTDAddress..... : Room 303, Building 3, No. 8, Shajingkeng Road, Liaobu
Town, Dongguan City, Guangdong Province

Telephone..... : /

Fax..... : /

Manufacturer..... : Dongguan Pinguan sports technology Co., LTDAddress..... : Room 303, Building 3, No. 8, Shajingkeng Road, Liaobu
..... Town, Dongguan City, Guangdong Province

Telephone..... : /

Fax..... : /

Factory..... : Dongguan Pinguan sports technology Co., LTDAddress..... : Room 303, Building 3, No. 8, Shajingkeng Road, Liaobu
Town, Dongguan City, Guangdong Province

Telephone..... : /

Fax..... : /

Test Result according to the standards on page 5: **Pass**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	5
1.1.Description of Standards and Results	5
1.2.Description of Performance Criteria	6
2. GENERAL INFORMATION	7
2.1.Description of Device (EUT)	7
2.2.Description of Test Facility	7
2.3.Statement of the measurement uncertainty	7
2.4.Measurement Uncertainty	7
3. MEASURING DEVICES AND TEST EQUIPMENT	8
3.1.Radiated Disturbance (Electric Field)	8
3.2.Electrostatic Discharge	8
4. RADIATED EMISSION MEASUREMENT	9
4.1.Block Diagram of Test Setup	9
4.2.Measuring Standard	9
4.3.Radiated Emission Limits	9
4.4.EUT Configuration on Test	10
4.5.Operating Condition of EUT	10
4.6.Test Procedure	10
4.7.Test Results	10
5. ELECTROSTATIC DISCHARGE IMMUNITY TEST	12
5.1.Block Diagram of Test Setup	12
5.2.Test Standard	12
5.3.Severity Levels and Performance Criterion	12
5.4.EUT Configuration on Test	12
5.5.Operating Condition of EUT	13
5.6.Test Procedure	13
5.7.Test Results	13
6. PHOTOGRAPH	15
6.1.Photo of Radiated Measurement	15
7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	16

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION (EN IEC 55014-1:2021)			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN IEC 55014-1:2021	-----	N/A
Clicks	EN IEC 55014-1:2021	-----	N/A
Radiated disturbance	EN IEC 55014-1:2021	-----	PASS
Harmonic current emissions	EN IEC 61000-3-2: 2019+A1: 2021+A2:2024	Class A	N/A
Voltage fluctuations & flicker	EN 61000-3-3:2013+A1:2019+A2:2021 +AC:2022	-----	N/A
IMMUNITY(EN IEC 55014-2:2021)			
Description of Test Item	Basic Standard	Performance Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2: 2009	B	PASS
Radio-frequency, Continuous radiated disturbance	EN 61000-4-3: 2006+A1: 2010	A	N/A
Electrical fast transient (EFT)	EN 61000-4-4: 2012	B	N/A
Surge (Input a.c. power ports)	EN 61000-4-5: 2014+A1: 2017	B	N/A
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6: 2014+AC: 2015	A	N/A
Power frequency magnetic field	EN 61000-4-8: 2010	A	N/A
Voltage dips, 60% reduction	EN 61000-4-11: 2004+A1: 2017	C	N/A
Voltage dips, 30% reduction		C	N/A
Voltage interruptions		C	N/A
N/A is an abbreviation for Not Applicable.			

1.2. Description of Performance Criteria

General Performance Criteria

Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;
- tests of all peripheral access (hard disks, floppy disks, printers, keyboard, mouse, etc.);
- quality of software execution;
- quality of data display and transmission;
- quality of speech transmission.

1.2.1. Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacture when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

1.2.2. Performance criterion B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacture, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operation state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

1.2.3. Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacture's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Smart Li-Polymer Battery Pack

Model Number : PG-8500

Power Supply : 5V, 2A, 10W, Batttery 3.85V 8500mAh

EUT Clock Frequency : \leq 108MHz

2.2. Description of Test Facility

Site Description
EMC Lab.

2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the AOC quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.4. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	30MHz~200MHz	$\pm 2.96\text{dB}$	(1)
		200MHz~1000MHz	$\pm 3.10\text{dB}$	(1)
Conduction Uncertainty	:	150kHz~30MHz	$\pm 1.63\text{dB}$	(1)
Power disturbance	:	30MHz~300MHz	$\pm 1.60\text{dB}$	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3. MEASURING DEVICES AND TEST EQUIPMENT

3.1. Radiated Disturbance (Electric Field)


Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2025/04/13
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2025/04/13
3	Log per Antenna	SCHWARZBECK	VULB9163	9163-470	2025/04/13
4	Amplifier	Compliance Direction	PAP-0102	21001	2025/04/13
5	EMI Test Software	AUDIX	E3	N/A	2025/04/13

3.2. Electrostatic Discharge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ESD Simulator	KIKUSUI	KC001311	KES4021	2025/04/13

4. RADIATED EMISSION MEASUREMENT

4.1. Block Diagram of Test Setup

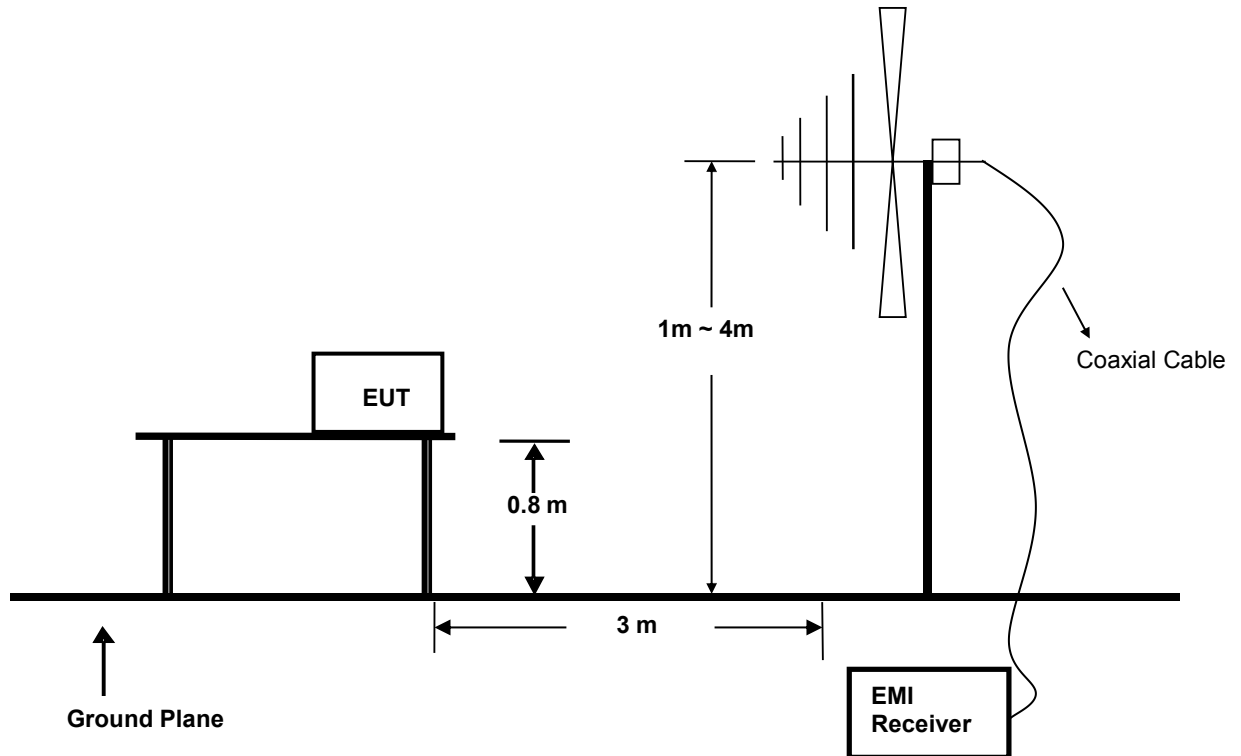

4.2. Measuring Standard

EN IEC 55014-1:2021

4.3. Radiated Emission Limits

EN 55032: 2015 Limits:

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note: (1) The smaller limit shall apply at the combination point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

4.4.EUT Configuration on Test

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

4.5.Operating Condition of EUT

4.5.1 Turn on the power.

4.5.2 After that, let the EUT work in test mode (ON) and measure it.

4.6.Test Procedure

The EUT is placed on a turntable, which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. By-log antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

The bandwidth of the Receiver is set at 120kHz.

The frequency range from 30MHz to 1000MHz is investigated.


4.7.Test Results

PASS.

The test result please refer to the next page.

Model No.	PG-8500	Test Date	July 29, 2025
Environmental Conditions	24°C/ 56% RH	Test Mode	On
Pol	Vertical	Detector Function	Quasi-peak
Test Engineer	Andy	Distance	3m

Test Graph

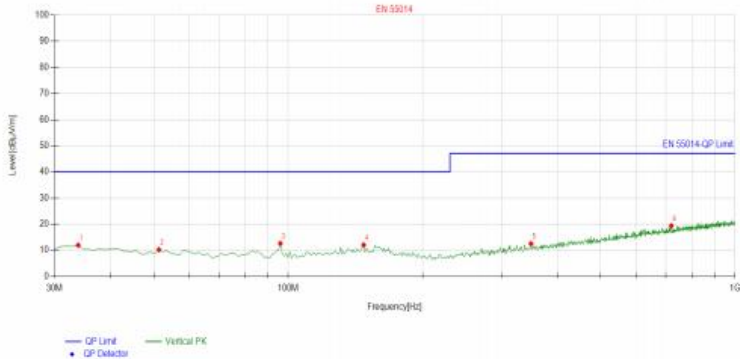


Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.883884	-17.19	29.14	11.95	40.00	28.05	100	125	Vertical
2	51.361361	-16.93	27.15	10.22	40.00	29.78	100	51	Vertical
3	96.026026	-20.38	33.00	12.62	40.00	27.38	100	335	Vertical
4	147.48748	-16.47	28.51	12.04	40.00	27.96	100	320	Vertical
5	349.44944	-16.36	28.87	12.51	47.00	34.49	100	11	Vertical
6	720.36036	-10.57	29.94	19.37	47.00	27.63	100	311	Vertical

Model No.	PG-8500	Test Date	July 29, 2025
Environmental Conditions	24°C/ 56% RH	Test Mode	Charging
Pol	Horizontal	Detector Function	Quasi-peak
Test Engineer	Andy	Distance	3m

Test Graph

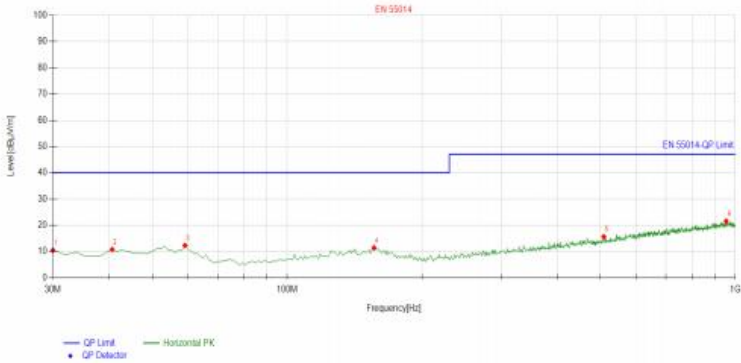


Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30	-17.35	27.84	10.49	40.00	29.51	100	111	Horizontal
2	40.680681	-16.46	27.20	10.74	40.00	29.26	100	67	Horizontal
3	59.129129	-17.65	29.96	12.31	40.00	27.69	100	192	Horizontal
4	156.22622	-16.09	27.46	11.37	40.00	28.63	100	59	Horizontal
5	508.68868	-13.69	29.34	15.65	47.00	31.35	100	224	Horizontal
6	954.36436	-7.85	29.44	21.59	47.00	25.41	100	227	Horizontal

5. ELECTROSTATIC DISCHARGE IMMUNITY TEST

5.1. Block Diagram of Test Setup

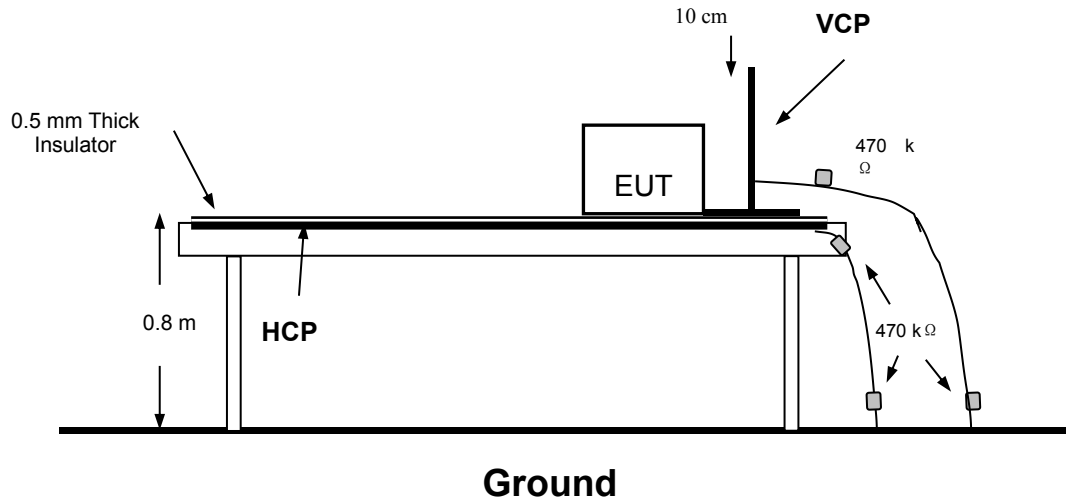

5.2. Test Standard

EN IEC 55014-2:2021 ,

Severity Level: 3 / Air Discharge: $\pm 8\text{KV}$, Level: 2 / Contact Discharge: $\pm 4\text{KV}$)

5.3. Severity Levels and Performance Criterion

5.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X	Special	Special

5.3.2. Performance Criterion: **B**

5.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.2.

5.5.Operating Condition of EUT

5.4.1.Setup the EUT as shown on Section 5.1.

5.4.2.Turn on the power of all equipments.

5.4.3.Let the EUT work in measuring mode (ON) and measure it.

5.6.Test Procedure

5.6.1.Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT.

After each discharge, the discharge electrode shall be removed from the EUT.

The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

5.6.2.Contact Discharge

All the procedure shall be same as Section 5.6.1. Except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

5.6.3.Indirect Discharge For Horizontal Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

5.6.4.Indirect Discharge For Vertical Coupling Plane

At least 10 single discharge (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT.

Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

5.7.Test Results

PASS.

Please refer to the following pages

Electrostatic Discharger Test Results			
Standard	<input type="checkbox"/> IEC 61000-4-2 <input checked="" type="checkbox"/> EN 61000-4-2		
Applicant	Dongguan Pinguan sports technology Co., LTD		
EUT	Smart Li-Polymer Battery Pack	Temperature	24℃
M/N	PG-8500	Humidity	53%
Criterion	B	Pressure	1021mbar
Test Mode	ON	Test Date	July 29, 2025
Test Engineer	Andy		

Air Discharge							
Test Points	Test Levels			Results			
	± 2kV	± 4kV	± 8kV	Passed	Fail	Performance Criterion	
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Contact Discharge							
Test Points	Test Levels		Results				
	± 2 kV	±4 kV	Passed	Fail	Performance Criterion		
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Discharge To Horizontal Coupling Plane							
Side of EUT	Test Levels		Results				
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion		
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Discharge To Vertical Coupling Plane							
Side of EUT	Test Levels		Results				
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion		
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B	

6. Photograph

6.1.Photo of Radiated Measurement



7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT



Fig.1



Fig.2



Fig.3



Fig.4

-----THE END OF REPORT-----